



PowerBuilder Extension Reference

PowerBuilder®

10.5

DOCUMENT ID: DC33821-01-1050-02

LAST REVISED: March 2006

Copyright © 1991-2006 by Sybase, Inc. All rights reserved.

This publication pertains to Sybase software and to any subsequent release until otherwise indicated in new editions or technical notes. Information in this document is subject to change without notice. The software described herein is furnished under a license agreement, and it may be used or copied only in accordance with the terms of that agreement.

To order additional documents, U.S. and Canadian customers should call Customer Fulfillment at (800) 685-8225, fax (617) 229-9845.

Customers in other countries with a U.S. license agreement may contact Customer Fulfillment via the above fax number. All other international customers should contact their Sybase subsidiary or local distributor. Upgrades are provided only at regularly scheduled software release dates. No part of this publication may be reproduced, transmitted, or translated in any form or by any means, electronic, mechanical, manual, optical, or otherwise, without the prior written permission of Sybase, Inc.

Sybase, the Sybase logo, ADA Workbench, Adaptable Windowing Environment, Adaptive Component Architecture, Adaptive Server, Adaptive Server Anywhere, Adaptive Server Enterprise, Adaptive Server Enterprise Monitor, Adaptive Server Enterprise Replication, Adaptive Server Everywhere, Adaptive Warehouse, Afaria, Answers Anywhere, Anywhere Studio, Application Manager, AppModeler, APT Workbench, APT-Build, APT-Edit, APT-Execute, APT-Translator, APT-Library, AvantGo Mobile Delivery, AvantGo Mobile Inspection, AvantGo Mobile Marketing Channel, AvantGo Mobile Pharma, AvantGo Mobile Sales, AvantGo Pylon, AvantGo Pylon Application Server, AvantGo Pylon Conduit, AvantGo Pylon PIM Server, AvantGo Pylon Pro, Backup Server, BizTracker, ClearConnect, Client-Library, Client Services, Convoy/DM, Copernicus, Data Pipeline, Data Workbench, DataArchitect, Database Analyzer, DataExpress, DataServer, DataWindow, DataWindow .NET, DB-Library, dbQueue, Developers Workbench, DirectConnect, DirectConnect Anywhere, Distribution Director, e-ADK, E-Anywhere, e-Biz Impact, e-Biz Integrator, E-Whatever, EC Gateway, ECMAP, ECRTP, eFulfillment Accelerator, Embedded SQL, EMS, Enterprise Application Studio, Enterprise Client/Server, Enterprise Connect, Enterprise Data Studio, Enterprise Manager, Enterprise SQL Server Manager, Enterprise Work Architecture, Enterprise Work Designer, Enterprise Work Modeler, eProcurement Accelerator, EWA, Financial Fusion, Financial Fusion Server, Gateway Manager, GlobalFIX, iAnywhere, iAnywhere Solutions, ImpactNow, Industry Warehouse Studio, InfoMaker, Information Anywhere, Information Everywhere, InformationConnect, InternetBuilder, iScript, Jaguar CTS, jConnect for JDBC, M2M Anywhere, Mach Desktop, Mail Anywhere Studio, Mainframe Connect, Maintenance Express, Manage Anywhere Studio, M-Business Anywhere, M-Business Channel, M-Business Network, M-Business Suite, MDI Access Server, MDI Database Gateway, media.splash, MetaWorks, mFolio, Mirror Activator, MySupport, Net-Gateway, Net-Library, New Era of Networks, ObjectConnect, ObjectCycle, OmniConnect, OmniSQL Access Module, OmniSQL Toolkit, Open Biz, Open Client, Open ClientConnect, Open Client/Server, Open Client/Server Interfaces, Open Gateway, Open Server, Open ServerConnect, Open Solutions, Optima++, PB-Gen, PC APT Execute, PC DB-Net, PC Net Library, Pharma Anywhere, PocketBuilder, Pocket PowerBuilder, Power++, power.stop, PowerAMC, PowerBuilder, PowerBuilder Foundation Class Library, PowerDesigner, PowerDimensions, PowerDynamo, PowerScript, PowerSite, PowerSocket, Powersoft, PowerStage, PowerStudio, PowerTips, Powersoft Portfolio, Powersoft Professional, PowerWare Desktop, PowerWare Enterprise, ProcessAnalyst, QAnywhere, Rapport, RemoteWare, RepConnector, Replication Agent, Replication Driver, Replication Server, Replication Server Manager, Replication Toolkit, Report-Execute, Report Workbench, Resource Manager, RFID Anywhere, RW-DisplayLib, RW-Library, Sales Anywhere, SDF, Search Anywhere, Secure SQL Server, Secure SQL Toolset, Security Guardian, SKILS, smart.partners, smart.parts, smart.script, SOA Anywhere, SQL Advantage, SQL Anywhere, SQL Anywhere Studio, SQL Code Checker, SQL Debug, SQL Edit, SQL Edit/TPU, SQL Everywhere, SQL Modeler, SQL Remote, SQL Server, SQL Server Manager, SQL SMART, SQL Toolset, SQL Server/CFT, SQL Server/DBM, SQL Server SNMP SubAgent, SQL Station, SQLJ, STEP, SupportNow, S.W.I.F.T. Message Format Libraries, Sybase Central, Sybase Client/Server Interfaces, Sybase Financial Server, Sybase Gateways, Sybase IQ, Sybase MPP, Sybase SQL Desktop, Sybase SQL Lifecycle, Sybase SQL Workgroup, Sybase User Workbench, SybaseWare, Syber Financial, SyberAssist, SybFlex, SyBooks, System 10, System 11, System XI (logo), SystemTools, Tabular Data Stream, TradeForce, Transact-SQL, Translation Toolkit, UltraLite, UltraLite.NET, UNIBOM, Unilib, Uninull, Unisep, Unistring, URK Runtime Kit for UniCode, VisualWriter, VQL, WarehouseArchitect, Warehouse Control Center, Warehouse Studio, Warehouse WORKS, Watcom, Watcom SQL, Watcom SQL Server, Web Deployment Kit, Web.PB, Web.SQL, WebSights, WebViewer, WorkGroup SQL Server, XA-Library, XA-Server, XcelleNet, and XP Server are trademarks of Sybase, Inc. 10/05

Unicode and the Unicode Logo are registered trademarks of Unicode, Inc.

All other company and product names used herein may be trademarks or registered trademarks of their respective companies.

Use, duplication, or disclosure by the government is subject to the restrictions set forth in subparagraph (c)(1)(ii) of DFARS 52.227-7013 for the DOD and as set forth in FAR 52.227-19(a)-(d) for civilian agencies.

Sybase, Inc., One Sybase Drive, Dublin, CA 94568.

Contents

About This Book	xiii
CHAPTER 1 PowerBuilder Extensions	1
About PowerBuilder extensions	1
Using PowerBuilder extensions.....	2
Getting information about PowerBuilder extensions	3
CHAPTER 2 EJB Client	5
EJBConnection	5
ConnectToServer	5
CreateJavaInstance	7
DisconnectServer	7
GetEJBTransaction	8
Lookup.....	9
EJBTransaction	10
Begin	10
Commit	11
GetStatus	12
Rollback.....	13
SetRollbackOnly	14
SetTransactionTimeout	15
JavaVM	16
CreateJavaVM.....	16
CreateJavaInstance	19
DynamicCast	20
GetActualClass.....	23
GetInterfaces	24
GetJavaClasspath	25
GetJavaVMVersion	26
GetSuperClass	26
IsJavaVMLoaded.....	27

CHAPTER 3	Web Services Client	29
	SoapConnection.....	29
	CreateInstance	29
	SetOptions.....	31
	SetProxyServerOptions.....	33
	SoapException	34
	UDDIProxy	36
	setInquiryUrl	36
	setOption	37
	findBusiness.....	37
	getBusinessDetail.....	38
	findService.....	39
 CHAPTER 4	 PowerBuilder Document Object Model	 41
	About PBDOM.....	41
	Node trees.....	42
	XML parser.....	42
	Objects and methods	42
	PBDOM objects.....	43
 CHAPTER 5	 PBDOM_ATTRIBUTE Class	 45
	PBDOM_ATTRIBUTE	45
	AddContent	47
	Clone	47
	Detach	49
	Equals	51
	GetBooleanValue	52
	GetContent	53
	GetDateValue.....	54
	GetDateTimeValue.....	55
	GetDoubleValue	56
	GetIntValue	56
	GetLongValue	56
	GetName	57
	GetNamespacePrefix	58
	GetNamespaceUri.....	58
	GetObjectClass	59
	GetObjectClassString.....	59
	GetOwnerDocumentObject	60
	GetOwnerElementObject	62
	GetQualifiedName.....	63
	GetRealValue	64

GetText.....	64
GetTextNormalize	66
GetTextTrim	68
GetTimeValue	69
GetUIntValue	70
GetUlongValue	70
HasChildren.....	71
InsertContent.....	72
IsAncestorObjectOf	74
RemoveContent	75
SetBooleanValue.....	77
SetContent	77
SetDateValue	80
SetDateTimeValue	81
SetDoubleValue	82
SetIntValue.....	83
SetLongValue.....	83
SetName	83
SetNamespace.....	86
SetOwnerElementObject.....	89
SetRealValue	91
SetText.....	92
SetTimeValue.....	92
SetUIntValue	93
SetUlongValue	93

CHAPTER 6	PBDOM_BUILDER Class	95
	PBDOM_BUILDER	95
	BuildFromDataStore	95
	BuildFromFile	96
	BuildFromString.....	99
	GetParseErrors	100

CHAPTER 7	PBDOM_CDATA Class	103
	PBDOM_CDATA	103
	Append	104
	Clone	105
	Detach	107
	Equals	108
	GetObjectClass	108
	GetObjectClassString	109
	GetOwnerDocumentObject	109
	GetParentObject.....	109

GetText.....	110
GetTextNormalize	110
GetTextTrim	110
SetParentObject	111
SetText	112

CHAPTER 8	PBDOM_ENTITYREFERENCE Class	113
	PBDOM_ENTITYREFERENCE	113
	Clone	114
	Detach	116
	Equals	116
	GetName	117
	GetObjectClass	117
	GetObjectClassString	118
	GetOwnerDocumentObject	118
	GetParentObject.....	118
	SetName	119
	SetParentObject	119

CHAPTER 9	PBDOM_CHARACTERDATA Class	121
	PBDOM_CHARACTERDATA	121
	Append	122
	Append Syntax 1	123
	Append Syntax 2	126
	Clone	126
	Detach	129
	Equals	130
	GetOwnerDocumentObject	131
	GetName	134
	GetObjectClass	134
	GetObjectClassString	135
	GetParentObject.....	137
	GetText.....	140
	GetTextNormalize	141
	GetTextTrim	144
	HasChildren.....	148
	IsAncestorObjectOf	149
	SetParentObject	149
	SetText	152

CHAPTER 10	PBDOM_COMMENT Class.....	153
	PBDOM_COMMENT	153
	Append	154
	Append Syntax 1	155
	Append Syntax 2	155
	Clone	156
	Detach	158
	Equals	159
	GetObjectClass	159
	GetObjectClassString	160
	GetOwnerDocumentObject	160
	GetParentObject.....	160
	GetText.....	161
	GetTextNormalize	161
	GetTextTrim	162
	SetParentObject	162
	SetText	163
 CHAPTER 11	 PBDOM_DOCTYPE Class.....	 165
	PBDOM_DOCTYPE.....	165
	Clone	166
	Detach	167
	Equals	167
	GetInternalSubset	167
	GetName	168
	GetObjectClass	168
	GetObjectClassString	168
	GetOwnerDocumentObject	169
	GetParentObject.....	169
	GetPublicID	169
	GetSystemID	170
	SetDocument.....	171
	SetInternalSubset.....	171
	SetName	172
	SetParentObject	172
	SetPublicID.....	173
	SetSystemID	174
 CHAPTER 12	 PBDOM_DOCUMENT Class	 177
	PBDOM_DOCUMENT	177
	AddContent	178
	Clone	181
	DetachRootElement	181

Equals	182
GetContent	182
GetDocType	184
GetObjectClass	184
GetObjectClassString	185
GetRootElement	185
HasChildren	186
HasRootElement	186
InsertContent	186
IsAncestorObjectOf	189
NewDocument	189
NewDocument Syntax 1	189
NewDocument Syntax 2	190
RemoveContent	193
SaveDocument	194
SetContent	195
SetDocType	196
SetRootElement	197

CHAPTER 13	PBDOM_ELEMENT Class.....	199
	PBDOM_ELEMENT	199
	AddContent	200
	AddContent Syntax 1	201
	AddContent Syntax 2	203
	AddNamespaceDeclaration	204
	Clone	205
	Detach	207
	Equals	207
	GetAttribute	208
	GetAttribute Syntax 1	209
	GetAttribute Syntax 2	210
	GetAttributes	210
	GetAttributeValue	211
	GetAttributeValue Syntax 1	212
	GetAttributeValue Syntax 2	213
	GetAttributeValue Syntax 3	214
	GetAttributeValue Syntax 4	215
	GetChildElement	215
	GetChildElement Syntax 1	216
	GetChildElement Syntax 2	216
	GetChildElements	217
	GetChildElements Syntax 1	218
	GetChildElements Syntax 2	218
	GetChildElements Syntax 3	219

GetContent	220
GetName	221
GetNamespacePrefix	222
GetNamespaceUri	222
GetObjectClass	223
GetObjectClassString	223
GetOwnerDocumentObject	224
GetParentObject	225
GetQualifiedName	225
GetText	226
GetTextNormalize	226
GetTextTrim	227
HasAttributes	228
HasChildElements	228
HasChildren	229
InsertContent	230
IsAncestorObjectOf	232
IsRootElement	232
RemoveAttribute	233
RemoveAttribute Syntax 1	233
RemoveAttribute Syntax 2	234
RemoveAttribute Syntax 3	234
RemoveChildElement	235
RemoveChildElement Syntax 1	235
RemoveChildElement Syntax 2	236
RemoveChildElements	237
RemoveChildElements Syntax 1	237
RemoveChildElements Syntax 2	238
RemoveChildElements Syntax 3	238
RemoveContent	239
RemoveNamespaceDeclaration	240
SetAttribute	241
SetAttribute Syntax 1	241
SetAttribute Syntax 2	244
SetAttribute Syntax 3	246
SetAttributes	249
SetContent	252
SetDocument	255
SetName	255
SetNamespace	256
SetParentObject	257
SetText	258

CHAPTER 14	PBDOM_EXCEPTION Class	259
	PBDOM exceptions	259
	PBDOM exception descriptions	260
	PBDOM_EXCEPTION	265
	GetExceptionCode	265
 CHAPTER 15	 PBDOM_OBJECT Class	 267
	PBDOM_OBJECT	267
	AddContent	268
	Clone	268
	Detach	269
	Equals	270
	GetContent	270
	GetName	271
	GetObjectClass	273
	GetObjectClassString	273
	GetOwnerDocumentObject	274
	GetParentObject	275
	GetText	276
	GetTextNormalize	278
	GetTextTrim	280
	HasChildren	283
	InsertContent	284
	IsAncestorObjectOf	285
	RemoveContent	286
	SetContent	287
	SetName	288
	SetParentObject	289
 CHAPTER 16	 PBDOM_PROCESSINGINSTRUCTION Class	 291
	PBDOM_PROCESSINGINSTRUCTION	291
	Clone	292
	Detach	293
	Equals	293
	GetData	294
	GetName	294
	GetNames	295
	GetObjectClass	295
	GetObjectClassString	296
	GetOwnerDocumentObject	296
	GetParentObject	296
	GetTarget	297
	GetText	297

	GetTextNormalize	298
	GetTextTrim	298
	GetValue	299
	RemoveValue	299
	SetData	300
	SetName	301
	SetParentObject	302
	SetValue	303
CHAPTER 17	PBDOM_TEXT Class	305
	PBDOM_TEXT	305
	Append	306
	Append Syntax 1	306
	Append Syntax 2	307
	Clone	307
	Detach	309
	Equals	310
	GetObjectClass	310
	GetObjectClassString	311
	GetOwnerDocumentObject	311
	GetParentObject	311
	GetText	312
	GetTextNormalize	312
	GetTextTrim	313
	SetParentObject	313
	SetText	314
CHAPTER 18	PBDOM Summary	317
	Summary of PBDOM classes and methods	317
Index		321

About This Book

Audience

This book is for programmers who build applications that use built-in PowerBuilder® extensions.

How to use this book

This book describes syntax and usage information for built-in extensions to the PowerScript® language:

- Chapter 1 presents an overview of PowerBuilder extensions and how you use them in a PowerScript application.
- Chapter 2 describes the objects used to build clients for Enterprise JavaBeans components.
- Chapter 3 describes the objects used to build SOAP clients for Web services.
- Chapter 4 presents an overview of the PowerBuilder Document Object Model (PBDOM).
- Chapters 5 through 17 describe each of the objects that make up the PBDOM.
- Chapter 18 provides a quick-reference list of PBDOM methods.

Related documents

Step-by-step instructions on building applications that use each of the built-in extensions are in *Application Techniques*.

For a complete list of PowerBuilder documentation, see the preface of *PowerBuilder Getting Started*.

Other sources of information

Use the Sybase Getting Started CD, the SyBooks CD, and the Sybase Product Manuals Web site to learn more about your product:

- The Getting Started CD contains release bulletins and installation guides in PDF format, and may also contain other documents or updated information not included on the SyBooks CD. It is included with your software. To read or print documents on the Getting Started CD, you need Adobe Acrobat Reader, which you can download at no charge from the Adobe Web site using a link provided on the CD.
- The SyBooks CD contains product manuals and is included with your software. The Eclipse-based SyBooks browser allows you to access the manuals in an easy-to-use, HTML-based format.

Some documentation may be provided in PDF format, which you can access through the PDF directory on the SyBooks CD. To read or print the PDF files, you need Adobe Acrobat Reader.

Refer to the *SyBooks Installation Guide* on the Getting Started CD, or the *README.txt* file on the SyBooks CD for instructions on installing and starting SyBooks.

- The Sybase Product Manuals Web site is an online version of the SyBooks CD that you can access using a standard Web browser. In addition to product manuals, you will find links to EBFs/Maintenance, Technical Documents, Case Management, Solved Cases, newsgroups, and the Sybase Developer Network.

To access the Sybase Product Manuals Web site, go to Product Manuals at <http://www.sybase.com/support/manuals/>.

Conventions

The formatting conventions used in this manual are:

Formatting example	Indicates
Retrieve and Update	When used in descriptive text, this font indicates: <ul style="list-style-type: none">• Command, function, and method names• Keywords such as true, false, and null• Datatypes such as integer and char• Database column names such as emp_id and f_name• User-defined objects such as dw_emp or w_main
<i>variable or file name</i>	When used in descriptive text and syntax descriptions, oblique font indicates: <ul style="list-style-type: none">• Variables, such as <i>myCounter</i>• Parts of input text that must be substituted, such as <i>pblname.pbd</i>• File and path names

Formatting example	Indicates
File>Save	Menu names and menu items are displayed in plain text. The greater than symbol (>) shows you how to navigate menu selections. For example, File>Save indicates “select Save from the File menu.”
dw_1.Update()	Monospace font indicates: <ul style="list-style-type: none">• Information that you enter in a dialog box or on a command line• Sample script fragments• Sample output fragments

If you need help

Each Sybase installation that has purchased a support contract has one or more designated people who are authorized to contact Sybase Technical Support. If you cannot resolve a problem using the manuals or online help, please have the designated person contact Sybase Technical Support or the Sybase subsidiary in your area.

About this chapter

This chapter provides a brief introduction to PowerBuilder extensions.

Contents

Topic	Page
About PowerBuilder extensions	1
Using PowerBuilder extensions	2
Getting information about PowerBuilder extensions	3

About PowerBuilder extensions

The PowerBuilder Native Interface (PBNI) is a standard programming interface that enables developers to extend the functionality of PowerBuilder. A PowerBuilder extension can be provided by Sybase, by you, or by a third party.

This book provides reference information for extensions provided by Sybase. In PowerBuilder 10.5, these extensions are for Enterprise JavaBeans clients, the PowerBuilder Document Object Model (PBDOM), SOAP clients for Web services, and the UDDIProxy class. Embedding these features in separate extension files instead of adding them to the core PowerBuilder runtime files helps keep the footprint of deployed applications as small as possible.

For information about building your own extensions, see the *PowerBuilder Native Interface Programmer's Guide and Reference*.

To find out about extensions provided by other developers, check the PBNI section of the PowerBuilder CodeXchange site at <http://powerbuilder.codexchange.sybase.com>.


Using PowerBuilder extensions

Every PowerBuilder extension requires a compiled C++ shared library, usually with the extension *.pbx* (for *PowerBuilder eXtension*). The C++ shared library file contains classes and methods that you use in your PowerScript target in the same way that you use PowerBuilder system objects or user objects.

To use the shared library in PowerBuilder, you place it in PowerBuilder's search path. In the System Tree, right-click a library in your PowerScript target, select **Import PB Extension** from the pop-up menu, navigate to the shared library, and select **Open**. This imports the definitions in the PBX into the library in your target. You can alternatively add the associated PBD file to the target's library search path. The PBD acts as a wrapper for the C++ shared library, enabling PowerBuilder to display the objects and methods it contains.

When you deploy an application that uses an extension, the C++ shared library must be deployed in the application's search path with the other PowerBuilder runtime files.

When you import an extension into a PowerScript target, the classes it contains display in the System Tree as user objects. You can expand the objects to display properties, events, and functions. You can inherit from extension objects and use drag-and-drop programming from the inherited objects in the System Tree as you do for other user objects.

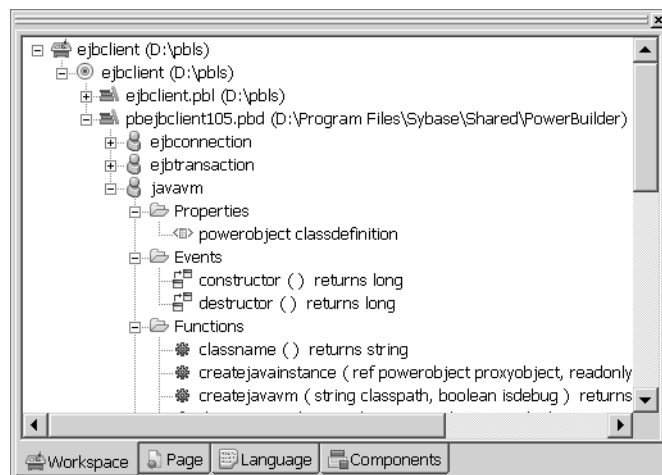

Using nonvisual classes

In PowerScript, use the classes in a nonvisual extension just as you would a custom class user object: declare an instance of the object, use the CREATE statement to create the instance, invoke the object's functions, and destroy the instance when you have finished with it. You can inherit from the native classes if you want to add functions or events to the class.

At runtime, instances of the native class are created as normal PowerBuilder objects.

Using visual classes

You do not need to declare an instance of a visual class or use the CREATE statement to create an instance. To use a visual extension, select File>Inherit from the PowerBuilder menu, select the PBL or PBD that contains the visual class in the Libraries list in the Inherit from Object dialog box, select the visual class, and click OK.

In the User Object painter, size the visual object and make any other changes you need, then save the object. You can then drag the new user object from the System Tree directly onto a window or onto another visual control, such as a tab control, and use it like any other visual user object.

PBXRuntimeError

PowerBuilder extensions can throw a special exception, `PBXRuntimeError`, that inherits from the PowerBuilder `RuntimeError` exception. If you use an extension in a PowerBuilder application, you should include try-catch blocks for this exception and report any occurrences to the provider of the extension. This exception is usually caused by programming errors within the extension.

Getting information about PowerBuilder extensions

Online Help

The classes and methods in the extensions provided by Sybase are described in this book, which is available in the PowerBuilder online Help. For PBDOM, each class is described in a separate chapter.

You can open the Help in several ways:

- Select *PowerBuilder Extension Reference* from the PowerBuilder Help Contents tab page.
- Double-click the file name (*pbext105.hlp*) in the *Sybase\PowerBuilder 10.5\Help* directory.

- Type a method name in the Script view, then press Shift+F1 to open the PowerBuilder Help Index tab with the focus on the first index entry for that method name. The name of the extension class displays in parentheses after the method name on the Index tab page, and it displays above the name of the method when you open the Help for the method.

If a PowerScript function description displays

If there is a PowerScript function with the same name, the Help opens automatically to display the PowerScript function. Click the Help Topics button in the Help window to display the Index tab so that you can select the extension method.

HTML books

For information about using the extensions provided by Sybase in your applications, see *Application Techniques* in the compiled HTML Help.

Third-party extensions

The PowerBuilder Help and documentation do not provide any specific information for extensions developed by third parties. To find out how to use a third-party extension, see the documentation provided with the extension.

About this chapter

This chapter describes the PowerBuilder extension classes that are used to connect to an application server and employ Enterprise JavaBeans (EJB) components. For more information about building clients for EJB components, see *Application Techniques*.

Contents

Topic	Page
EJBConnection	5
EJBTransaction	10
JavaVM	16

EJBConnection

Description

The EJBConnection class connects to an EJB server and locates an EJB.

Methods

EJBConnection has five member functions:

- ConnectToServer
- CreateJavaInstance
- DisconnectServer
- GetEJBTransaction
- Lookup

ConnectToServer

Description

Connects a client application to an EJB server. The client application must call ConnectToServer before it can use a remote object on the server.

Syntax

connection.ConnectToServer (string *properties*[])

Argument	Description
<i>connection</i>	The name of the EJBConnection object you want to use to establish the connection
<i>properties</i> []	A string array used to pass name/value pairs that specify how the connection will be established

Return value	None
Throws	NamingException
Examples	In this example, the client application connects to a WebLogic server application using the Connection object called conn:

```
ejbconnection conn
helloejbhome hellohome
helloejb hello
string properties[ ]
string msg
```

```
// Type each of the following statements on one line
properties[1]="javax.naming.Context.INITIAL_CONTEXT_FACTORY=weblogic.jndi.
WLInitialContextFactory"
properties[2]="javax.naming.Context.PROVIDER_URL=t3://svr1:7001"
properties[3]="javax.naming.Context.SECURITY_PRINCIPAL=myid"
properties[4]="javax.naming.Context.SECURITY_CREDENTIALS=mypass"
```

```
conn = create ejbconnection
TRY
    conn.connectToServer(properties)
CATCH (remoteexception re)
    messagebox("remoteexception", re.GetMessage())
CATCH (createexception ce)
    messagebox("createexception", ce.GetMessage())
END TRY
```

Usage	You must provide ConnectToServer with a set of properties that specify how the connection will be established. Before calling ConnectToServer, declare a string array variable and assign values for the javax.naming.Context constants shown in the following table to the elements of the array.
-------	--

javax.naming.context constant	Value
INITIAL_CONTEXT_FACTORY	Server dependent. For example: EAServer: com.sybase.ejb.InitialContextFactory WebLogic: weblogic.jndi.WLInitialContextFactory WebSphere: com.ibm.websphere.naming.WsnInitialContextFactory
PROVIDER_URL	URL for the Server's port. For example: <code>iiop://myserver:9000</code>
SECURITY_PRINCIPAL	User name required for access to the server.
SECURITY_CREDENTIALS	Credentials associated with the user name, typically a password.

See also	CreateJavaInstance Lookup
----------	------------------------------

CreateJavaInstance

Description Creates an instance of a Java object from a proxy name.

Deprecated function

This function is maintained for backward compatibility. You should use the CreateJavaInstance function on the JavaVM object for new development. You do not need to be connected to a server to create a local instance of a Java object.

Syntax `connection.CreateJavaInstance (powerobject proxyobject, string proxyname)`

Argument	Description
<i>connection</i>	The name of the EJBCConnection object used to establish the connection.
<i>proxyobject</i>	PowerObject into which the function places a reference to the object specified by proxyname. This argument is passed by reference.
<i>proxyname</i>	The name of the proxy object for the local Java class.

Return value Long. Returns 0 for success and one of the following values for failure:

- 1 Failed to create Java class.
- 2 Invalid proxy name.
- 3 Failed to create proxy object.

See also CreateJavaInstance

DisconnectServer

Description Disconnects a client application from an EJB server application.

Syntax `connection.DisconnectServer ()`

Argument	Description
<i>connection</i>	The name of the EJBCConnection object used to establish the connection you want to sever

Return value None

Throws NamingException

Examples In this example, the client application disconnects from the server application using the EJBConnection object myconnect:

```
myconnect.DisconnectServer()
```

See also ConnectToServer

GetEJBTransaction

Description Returns a reference to the EJBTransaction object associated with the client.

Syntax `connection.GetEJBTransaction()`

Argument	Description
<i>connection</i>	The name of the EJBConnection object used to establish the connection

Return value EJBTransaction

Examples This example shows the use of GetEJBTransaction to return a reference to the EJBTransaction object so that you can control transactions from the client:

```
// Instance variables:
// EJBConnection myconnect
EJBTransaction mytrans
long ll_status

mytrans = myconnect.GetEJBTransaction()
ll_status = mytrans.GetStatus()
```

Usage The PowerBuilder client can control the transaction demarcation of EJBs. After a transaction has been started with the EJBTransaction Begin method, GetEJBTransaction can be used to return the name of the transaction.

See also Begin
Commit
GetStatus
Rollback
SetRollbackOnly
SetTransactionTimeout

Lookup

Description Allows a PowerBuilder client to obtain the home interface of an EJB component in an application server in order to create an instance of the component.

Syntax `connection.Lookup (string proxyname, string JNDIname, string homeinterfacename)`

Argument	Description
<i>connection</i>	The name of the EJBConnection object used to establish the connection
<i>proxyname</i>	The name of the proxy object for the EJB component
<i>JNDIname</i>	The JNDI name of the EJB component
<i>homeinterfacename</i>	The fully-qualified class name of the EJB home interface

Return value Powerobject. A proxy object for the home interface of the EJB.

Throws NamingException

Examples The following example uses lookup to locate the home interface of the Multiply session EJB in the Java package `com.xyz.math`. The example assumes the connection to the EJB server has already been established:

```
// Instance variable:
// EJBConnection myconnect
Multiply myMultiply
MultiplyHome myMultiplyHome
long ll_product

TRY
    myMultiplyHome = myconnect.lookup("MultiplyHome", &
        "Math/Multiply", "com.xyz.math.MultiplyHome")
    myMultiply = myMultiplyHome.create()
    ll_product = myMultiply.multiply(1234, 4567)
catch (remoteexception re)
    messagebox("remoteexception", re.GetMessage())
catch (createexception ce)
    messagebox("createexception", ce.GetMessage())
CATCH (exception e)
    MessageBox("Exception", e.getmessage())
END TRY
```

The style used for the JNDI name depends on the EJB server.

See also ConnectToServer

EJBTransaction

Description	The EJB transaction class enables PowerBuilder clients to control a transaction on an EJB server. EJBTransaction maps closely to the <code>javax.transaction.UserTransaction</code> interface.
Methods	EJBTransaction has six member functions: <ul style="list-style-type: none">BeginCommitGetStatusRollbackSetRollbackOnlySetTransactionTimeout

Begin

Description Creates a new transaction and associates it with the current thread.

Syntax `ejbtrans.Begin ()`

Argument	Description
<i>ejbtrans</i>	The name of an EJBTransaction object

Return value None

Examples The following example shows the use of `begin` to create a transaction from a client:

```
EJBTransaction trans
EJBConnection conn
string properties[ ]

// set properties
.....
conn = create ejbconnection
TRY
    conn.connectToServer(properties)
    trans = conn.GetEjbTransaction
    trans.begin()
CATCH (exception e)
    messagebox("exception", e.getmessage())
END TRY
```

See also

- Commit
- GetStatus
- GetEJBTransaction (EJBConnection class)
- Rollback
- SetRollbackOnly
- SetTransactionTimeout

Commit

Description Declares that the transaction associated with the calling thread should be committed.

Syntax *ejbtrans*.Commit ()

Argument	Description
<i>ejbtrans</i>	The name of an EJBTransaction object

Return value None

Examples In this example, the client calls the `dopayroll` method on the `CmpnyAcct` EJB component, which processes a company payroll. If the company has sufficient funds to meet the payroll, the client commits the transaction. Otherwise, an exception is thrown and the client rolls back the transaction:

```
// Instance variables:
// EJBTransaction trans
// EJBConnection conn
// CmpnyAcctHome AcctHome
// CmpnyAcct Acct

TRY
    trans.begin()
    AcctHome = conn.lookup("CmpnyAcctHome",
        "Sample/CmpnyAcct", "sample.CmpnyAcctHome")
    Acct = AcctHome.create()
    Acct.dopayroll()
    trans.commit()
CATCH (remoteexception re)
    messagebox("remoteexception", re.GetMessage())
CATCH (createexception ce)
    messagebox("createexception", ce.GetMessage())
CATCH (exception e1)
    MessageBox ("exception", e1.getmessage() )
TRY
    trans.rollback();
```

```
        CATCH (exception e2)
            MessageBox ("exception", e2.getmessage() )
        END TRY
    END TRY
```

Usage The Commit method completes the transaction associated with the calling thread. The transaction is not completed if any other participants in the transaction vote to roll back the transaction.

See also Begin
 GetStatus
 GetEJBTransaction (EJBConnection class)
 Rollback
 SetRollbackOnly
 SetTransactionTimeout

GetStatus

Description Returns the status of the EJB transaction associated with the client.

Syntax *ejbtrans*.GetStatus ()

Argument	Description
<i>ejbtrans</i>	The name of an EJBTransaction object

Return value A long value representing the transaction status

Possible values are:

- 1 Status active
- 2 Status marked rollback
- 3 Status prepared
- 4 Status committed
- 5 Status rolled back
- 6 Status unknown
- 7 Status no transaction
- 8 Status preparing
- 9 Status committing
- 10 Status rolling back

Examples	<p>This example shows the use of <code>GetStatus</code> to obtain the state of the current transaction:</p> <pre>// Instance variables: // EJBConnection myconnect EJBTransaction mytrans long ll_status mytrans = myconnect.GetEJBTransaction() ll_status = mytrans.GetStatus()</pre>
Usage	The <code>GetStatus</code> method can be used to determine the current status of a transaction by the client that initiated the transaction using the <code>Begin</code> method.
See also	<p> Begin Commit GetEJBTransaction (EJBConnection class) Rollback SetRollbackOnly SetTransactionTimeout </p>

Rollback

Description	Rolls back the transaction associated with the calling thread.				
Syntax	<code>ejbtrans.Rollback ()</code>				
	<table> <tr> <th>Argument</th><th>Description</th></tr> <tr> <td><i>ejbtrans</i></td><td>The name of an EJBTransaction object</td></tr> </table>	Argument	Description	<i>ejbtrans</i>	The name of an EJBTransaction object
Argument	Description				
<i>ejbtrans</i>	The name of an EJBTransaction object				
Return value	None				
Examples	<p>This example shows the use of <code>Rollback</code> to roll back a transaction when an update does not succeed:</p> <pre>// Instance variables: // EJBTransaction trans // TRY trans.begin() Acct.updateChecking(amount) trans.commit() CATCH (exception e1) TRY trans.rollback() CATCH (exception e2)</pre>				

```
        MessageBox("Rollback failed", e2.getMessage())
    END TRY
    MessageBox("Transaction failed", e1.getMessage())
END TRY
```

- See also
- Begin
Commit
GetStatus
GetEJBTransaction (EJBConnection class)
SetRollbackOnly
SetTransactionTimeout

SetRollbackOnly

Description

Modifies a transaction associated with a calling thread so that the only possible outcome is to roll back the transaction.

Syntax

ejbtrans.SetRollbackOnly ()

Argument	Description
<i>ejbtrans</i>	The name of an EJBTransaction object

Return value

None

Examples

In this example, a participant in a transaction has determined that it should be rolled back. The participant gets a reference to the current transaction and votes to roll back the transaction:

```
// Instance variables:
// EJBConnection conn
// EJBTransaction trans

trans = conn.GetEJBTransaction()
trans.SetRollbackOnly()
```

Usage

Rollback is typically called by the originator of the transaction, but another participant in a transaction can call SetRollbackOnly to vote that the transaction should be rolled back.

- See also
- Begin
Commit
GetStatus
GetEJBTransaction (EJBConnection class)
Rollback
SetTransactionTimeout

SetTransactionTimeout

Description Sets the timeout value for subsequent transactions. The transaction is rolled back if it does not complete before the timeout expires.

Syntax `ejbtrans.SetTransactionTimeout (long seconds)`

Argument	Description
<i>ejbtrans</i>	The name of an EJBTransaction object
<i>seconds</i>	A long that specifies the number of seconds that elapse before a transaction is rolled back

Return value None

Examples This example shows the use of SetTransactionTimeout to set the timeout period to five minutes:

```
// Instance variables:
// EJBConnection conn
// EJBTransaction trans

TRY
    trans.SetTransactionTimeout(300)
    trans.begin()
CATCH (exception e)
    MessageBox("Exception", e.getMessage())
END TRY
```

Usage The SetTransactionTimeout method specifies the number of seconds that can elapse before a transaction is rolled back. The timeout period applies to transactions created by subsequent invocations of Begin. If *seconds* is 0, no timeout period is in effect.

See also Begin
Commit
GetStatus
GetEJBTransaction (EJBConnection class)
Rollback
SetRollbackOnly

JavaVM

Description The JavaVM class provides a method for loading and initializing a Java VM. It also provides methods for obtaining the version of the Java VM and the classpath it is using, to get the class name, super class name, and interface name of a Java class from the PowerBuilder proxy for that class, and to down cast a PowerBuilder proxy to another PowerBuilder proxy.

Methods JavaVM has the following member functions:

- CreateJavaVM
- CreateJavaInstance
- DynamicCast
- GetActualClass
- GetInterfaces
- GetJavaClasspath
- GetJavaVMVersion
- GetSuperClass
- IsJavaVMLoaded

CreateJavaVM

Description Loads and initializes a Java VM or attaches an existing Java VM to the current process.

Syntax `javavm.createJavaVM(string classpath, boolean isdebug)`

Argument	Description
<i>javavm</i>	An instance of the JavaVM class
<i>classpath</i>	A string specifying the classpath that contains files required by the EJB server, such as the path to the EJB classes
<i>isdebug</i>	A boolean that determines whether debug information is saved to a file called <i>VM.out</i> in the directory where the current application is located

Return value Integer. Returns one of the following integer values:

- 1** Success. The Java VM had already been loaded and was attached to the current process.
- 0** Success. The Java VM was loaded and initialized and attached to the current process.

- 1 Failure. The Java VM was not loaded, possibly because *jvm.dll* was not found in the classpath.
- 2 Failure. The *pbejbclient105.jar* file was not found.

Examples

This example shows how `createJavaVM` might be used with a connection to EAServer:

```

JavaVM l_jvm
EJBConnection l_ejbconn
java_integer val
long rc
l_jvm = CREATE JavaVM
l_EJBConn = CREATE EJBConnection

TRY
  IF l_jvm.createJavaVM("", false) >= 0 THEN
    string ls_props[]
    ls_props[1] = "javax.naming.Context.INITIAL_CONTEXT_FACTORY=
      com.sybase.ejb.InitialContextFactory"
    ls_props[2] = "javax.naming.Context.PROVIDER_URL=iiop://localhost:9000"
    ls_props[3] = "javax.naming.Context.SECURITY_PRINCIPAL=jagadmin"
    ls_props[4] = "javax.naming.Context.SECURITY_CREDENTIALS=jagadmin"
    l_EJBConn.connectToServer(ls_props)
    l_EJBConn.createJavaInstance(val, "java_integer")
    val.java_integer(17)
    MessageBox("The value is", val.IntValue())
  ELSE
    MessageBox("createJavaVM", "Failed", StopSign!)
  END IF
CATCH (Throwable g)
  MessageBox("Exception in createJavaInstance", g.getMessage())
END TRY

```

Usage

The *isdebug* argument is used to record information about the Java VM, including class loads, in the file *VM.out* in the directory where the current application is located.

The *classpath* argument must include the classes and JAR files required by the server, if they are not already listed in the classpath used by the Java VM.

Classpath argument has no effect if the JVM is already running

Files and directories passed only in the *classpath* argument are not available to the Java VM if it has already been started by another process. In the development environment, you can check whether the Java VM is running and, if so, which classpath it is using, on the Java page of the System Options dialog box. At runtime, you can use the `IsJavaVMLoaded` method to determine whether the Java VM is already running, and the `GetJavaClasspath` method to find the classpath.

In the development environment, the classpath used by the Java VM is constructed by concatenating these paths:

- A classpath added programmatically when the JVM is started. For example, the classpath you pass to this method.
- The PowerBuilder runtime static registry classpath. This path is built into the *pbjvm105.dll* and contains classes required at runtime for features such as PDF generation and EJB clients.
- The PowerBuilder system classpath. This path resides in a Windows registry key installed when you install PowerBuilder. It contains classes required at design time for Java-related PowerBuilder features.
- The PowerBuilder user classpath. This is the path that you specify on the Java page of the System Options dialog box.
- The system CLASSPATH environment variable.
- The current directory.

The JVM uses the following classpath at runtime:

- A classpath added programmatically when the JVM is started
- The PowerBuilder runtime static registry classpath
- The system CLASSPATH environment variable
- The current directory

See also

`ConnectToServer`
`GetJavaClasspath`
`GetJavaVMVersion`
`IsJavaVMLoaded`

CreateJavaInstance

Description Creates an instance of a Java object from a proxy name.

Syntax *javavm.CreateJavaInstance (powerobject proxyobject, string proxyname)*

Argument	Description
<i>javavm</i>	An instance of the JavaVM class.
<i>proxyobject</i>	PowerObject into which the function places a reference to the object specified by proxyname. This argument is passed by reference.
<i>proxyname</i>	The name of the proxy object for the local Java class.

Return value Long. Returns 0 for success and one of the following values for failure:

- 1 Failed to create Java class.
- 2 Invalid proxy name.
- 3 Failed to create proxy object.

Examples In this example, the create method accepts a Java Integer class argument. PowerBuilder creates a proxy called *java_integer* (the prefix *java_* is required to prevent a conflict with the PowerBuilder integer type). The call to *CreateJavaInstance* sets the value of that variable so you can call the EJB create method:

```
CustomerRemoteHome homeobj
CustomerRemote beanobj
java_integer jint_a

try
    homeobj = conn.lookup("CustomerRemoteHome", &
        "custpkg/Customer", "custpkg.CustomerRemoteHome" )
catch (Exception e)
    MessageBox( "Exception in Lookup", e.getMessage() )
    return
end try

try
    g_jvm.createJavaInstance(jint_a, "java_integer")
    jint_a.java_integer("8")
    beanobj = homeobj.create( jint_a, sle_name.text )
catch (RemoteException re)
    MessageBox( "Remote Exception", re.getMessage() )
    return
catch (CreateException ce)
    MessageBox( "Create Exception", ce.getMessage() )
    return
```

```
catch (Throwable t)
    MessageBox(" Other Exception", t.getMessage())
end try

MessageBox( "Info", &
    "This record has been successfully saved " &
    + "~r~ninto the database" )
```

Usage Use this method when an EJB method accepts a Java class as an argument. For example, if the primary key class argument to the `findByPrimaryKey` method is a Java class, use the `CreateJavaInstance` method to create the primary key class. You then use a PowerBuilder proxy to communicate with the Java class.

DynamicCast

Description Converts an instantiated PowerBuilder proxy object to a proxy for the passed-in proxy name.

Syntax `javavm.DynamicCast(powerobject proxyobject, readonly string proxyname)`

Argument	Description
<i>javavm</i>	An instance of the JavaVM class
<i>proxyobject</i>	An instantiated PowerBuilder proxy object
<i>proxyname</i>	A string containing the name of the proxy to be instantiated

Return value Powerobject. A new proxy object for the Java class referenced by *proxyname*. This method returns null if the proxy cannot be created.

Examples **Example 1** In the following example, the object returned from the `nextElement` method is represented by a proxy for the `Employee` class. The `GetActualClass` method is used to determine whether the object is actually a `SalariedEmployee`, and if it is, the proxy `px_Employee` is down cast to the proxy `px_SalariedEmployee` so that the `adjustSalary` method can be called:

```
DepartmentHome    px_DeptHome
Department         px_Dept
Enumeration        px_EmployeeList
Employee           px_Employee
Salaried            px_SalariedEmployee
Contract           px_ContractEmployee
EJBConnection      conn

conn = create ejbconnection
try
    conn.connectToServer(properties)
```

```

px_DeptHome = conn.lookup("DepartmentHome", &
    "Department", &
    "com.joesportinggoods.ejbbs.DepartmentHome")
px_Dept = px_DeptHome.findByPrimaryKey(as_DeptName)

px_EmployeeList = px_Dept.getEmployees()
DO WHILE px_EmployeeList.hasMoreElements()
    px_Employee = px_EmployeeList.nextElement()
    IF i_jvm.getActualClass(px_Employee) = &
        "com.joesportinggoods.ejbbs.Salaried" THEN
        px_SalariedEmployee = &
            i_jvm.dynamicCast(px_Employee, "Salaried")
        px_SalariedEmployee.adjustSalary(al_increase)
    END IF
LOOP
catch (Exception e)
    THROW CREATE ApplyRaiseException
end try

```

Example 2 In this example, `getAllItems` returns a `java.lang.Object` in the EJB declaration, which maps to the PowerBuilder Any data type. The call to `GetInterfaces` determines whether what is returned is a `java.util.List`. If it is, a call to `DynamicCast` obtains a proxy for `List`, which is used to obtain the size of the list before using its `Get` method to obtain the elements of the list. A method such as `getAllItems` can be used in many situations, such as to get a list of part numbers for any type of product.

```

ItemManagerHome px_ItemMgrHome
ItemManager px_ItemMgr
Item px_Item
List px_ItemList
any any_Object
boolean ib_isAList = FALSE
string is_IFs[]
string is_actualClass
long ll_row

TRY
    px_ItemMgrHome =
        g_EJBConn.Lookup("ItemManagerHome", &
            "ItemManager", "com.xapic.ItemManagerHome")
    px_ItemMgr = px_ItemMgrHome.create()
    any_Object = px_ItemMgr.getAllItems()
    // check if object implements java.util.List interface
    integer i
    FOR i = 1 to g_javaVM.getInterfaces(any_Object, &
        is_IFs)

```

```
IF is_IFs[i] = "java.util.List" THEN
    ib_isAList = TRUE
    EXIT
END IF
NEXT
// if it is a list
IF ib_isAList THEN
    px_ItemList = g_javaVM.dynamicCast(any_Object, &
        "list")
    // traverse the list
    FOR i = 0 TO px_ItemList.size() - 1
        // get item on the list
        any_Object = px_ItemList.get(i)
        // determine its class and dynamically cast it
        is_actualClass = &
            g_javaVM.getActualClass(any_Object)
        is_actualClass = Mid(is_actualClass, &
            LastPos(is_actualClass, ".") + 1, &
            Len(is_actualClass))
        px_Item = g_javaVM.dynamicCast(any_Object,
            is_actualClass)
        // add item to datastore
        ll_row = ads_Items.insertRow(0)
        ads_Items.object.id[ll_row] = px_Item.getID()
        ads_Items.object.type[ll_row] = is_actualClass
    NEXT
END IF
CATCH (Throwable t)
    // Handle exception
END TRY
```

Usage

There are two scenarios in which a Java object returned from a call to an EJB method can be represented by a proxy that does not provide the methods you need:

- If the class of a Java object returned from an EJB method call is dynamically generated, PowerBuilder uses a proxy for the first interface implemented by the Java class.
- The prototype of an EJB method that actually returns *someclass* can be defined to return a class that *someclass* extends or implements.

For example, the prototype of a method that actually returns an object of type `java.util.ArrayList` can be defined to return `java.util.Collection` instead. (The `java.util.ArrayList` class inherits from `java.util.AbstractList`, which inherits from `java.util.AbstractCollection`, which implements `java.util.Collection`.) If the method prototype has a return type of `java.util.Collection`, PowerBuilder uses a proxy for `java.util.Collection`.

The `DynamicCast` method allows you to cast the returned proxy object to a proxy for the interface you require, or for the actual class of the object returned at runtime so that the methods of that object can be used.

You can obtain the actual class of the object using the `GetActualClass` method. You can also use the `DynamicCast` method with the `GetSuperClass` method, which returns the immediate parent of the Java class, and the `GetInterfaces` method, which writes a list of interfaces implemented by the class to an array of strings.

For example, consider the following class:

```
public class java.util.LinkedList extends java.util.AbstractSequentialList
implements java.util.List, java.lang.Cloneable, java.io.Serializable
```

`GetActualClass` returns `java.util.LinkedList`, `GetSuperClass` returns `java.util.AbstractSequentialList`, and `GetInterfaces` returns 3 and writes three strings to the referenced string array: `java.util.List`, `java.lang.Cloneable`, and `java.io.Serializable`.

See also

`CreateJavaVM`
`GetActualClass`
`GetInterfaces`
`GetSuperClass`

GetActualClass

Description Returns the class of the Java object that a PowerBuilder proxy object represents.

Syntax `javavm.GetActualClass(powerobject proxyobject)`

Argument	Description
<i>javavm</i>	An instance of the JavaVM class
<i>proxyobject</i>	An instantiated PowerBuilder proxy object

Return value String

Usage If an EJB method is defined to return a Java class that is not the actual object returned at runtime, but is instead a class that the actual object's class extends or implements, you can use `GetActualClass` to return the class of the actual object returned. You can then use the `DynamicCast` method to cast the proxy returned from the method to a proxy for the actual class of the object.

For more information and an example, see the description of the `DynamicCast` method.

See also `CreateJavaVM`
`DynamicCast`
`GetInterfaces`
`GetSuperClass`

GetInterfaces

Description Populates a string array with the names of interfaces implemented by the Java object that a PowerBuilder proxy object represents.

Syntax `javavm.GetInterfaces(powerobject proxyobject, ref string interfacename[])`

Argument	Description
<i>javavm</i>	An instance of the JavaVM class
<i>proxyobject</i>	An instantiated PowerBuilder proxy object
<i>interfacename[]</i>	A reference to an unbounded array of strings to hold the names of interfaces implemented by the Java object represented by the PowerBuilder proxy object

Return value Integer. Returns the number of interfaces implemented by the Java object represented by *proxyobject*. If no interfaces are implemented by the Java object, this method returns 0. If *proxyobject* is invalid, this method returns -1.

Usage If a class implements multiple interfaces, the proxy returned from an EJB method call that returns a Java object maps to the first interface implemented by the Java class. This method writes a list of interfaces implemented by the class to an array of strings. It can be used in conjunction with the `DynamicCast` method to cast the returned proxy to the interface required.

For more information, see the description of the `DynamicCast` method.

See also `CreateJavaVM`
`DynamicCast`
`GetActualClass`
`GetSuperClass`

GetJavaClasspath

Description	Gets the classpath of the current Java VM.
Syntax	<code>javavm.getJavaClasspath()</code>
Return value	String
Examples	This example shows how to use <code>GetJavaClasspath</code> to get the classpath when the JVM is started and write it to a log file:

```
// instance variables:
// JavaVM i_jvm
// boolean i_jvm_started = false
// string is_classes

//Start JavaVM and Prepare to Connect to EJB server
string classpath
Integer li_ret

//create JAVAVM
if i_jvm_started = false then
    i_jvm = create javavm

    classpath = is_classes
    li_ret = i_jvm.createJavaVM(classpath, true)
    if li_ret = -1 then
        MessageBox("Error", "Failed to load JavaVM")
    end if
    if li_ret = -2 then
        MessageBox("Error", "Failed to load EJBLocator")
    end if

    i_jvm_started = true

    integer li_FileNum
    string ls_classpath, ls_string

    li_FileNum = FileOpen("C:\temp\classpath.log", &
        LineMode!, Write!, LockWrite!, Append!)
    ls_classpath = i_jvm.getjavaclasspath()
    ls_string = String(Now()) + " " + String(Now())
    ls_string += ": ~r~n" + ls_classpath + "~r~n"

    FileWrite(li_FileNum, ls_string)
    FileClose(li_filenenum)
end if
```

See also CreateJavaVM
 GetJavaVMVersion
 IsJavaVMLoaded

GetJavaVMVersion

Description Gets the version number of the current Java VM.

Syntax `javavm.getJavaVMVersion()`

Return value String representing the Java VM version. For example, for JDK 1.4, `GetJavaVMVersion` returns 1.4.0.

Examples This example shows how to use `GetJavaVMVersion`:

```
// global variable JavaVM g_jvm
string ls_javaVMVersion
ls_javaVMVersion = g_jvm.getJavaVMVersion()
```

See also CreateJavaVM
 GetJavaClasspath
 IsJavaVMLoaded

GetSuperClass

Description Returns the name of the super class of the class of the Java object that a PowerBuilder proxy object represents.

Syntax `javavm.GetSuperClass(powerobject proxyobject)`

Argument	Description
<i>javavm</i>	An instance of the JavaVM class
<i>proxyobject</i>	An instantiated PowerBuilder proxy object

Return value String. If the current Java object is `Java.lang.Object` or an interface, returns null.

Examples This example assumes that you have subclassed the Java `Decimal` class. Your class, `My.Decimal`, extends `java.lang.Decimal`. After you build a proxy project for this class, you can determine the real Java class name that the proxy represents with code like the following:

```
java_decimal dec_num
string classname, supname

conn.createjavainstance(dec_num, "java_decimal")
```

```

classname = g_javavm.getactualclass(dec_num) &
classname = "My.Decimal"
supername = g_javavm.getsuperclass(dec_num) &
supername = "java.lang.Decimal"

```

Usage This method returns the name of the immediate parent of the class referenced by the proxy object. For example, if *proxyobject* is a `java.io.FilterReader`, `GetSuperClass` returns `java.io.Reader`. `GetSuperClass` can be used in conjunction with the `GetInterfaces` and `DynamicCast` methods to cast a proxy object returned from an EJB method call to a different object.

For more information, see the description of the `DynamicCast` method.

See also `CreateJavaVM`
`DynamicCast`
`GetActualClass`
`GetInterfaces`

IsJavaVMLoaded

Description Determines whether the Java VM has been loaded.

Syntax `javavm.IsJavaVMLoaded()`

Argument	Description
<code>javavm</code>	An instance of the JavaVM class

Return value Boolean. Returns true if the Java VM has already been loaded and false if it has not.

Examples This example tests whether the Java VM has been loaded before attempting to create and load a Java VM:

```

if (IsJavaVMLoaded) then
    // skip some processing
else
    // perform processing
end if

```

Usage Use this method if you need to determine whether the Java VM is loaded before proceeding. You might want to enable or disable some features of your application if the Java VM has already been loaded. For example, if your application provides a window in which the user can specify a list of classes that is added to the classpath used by the `CreateJavaVM` method, you can disable this feature if the Java VM has already been loaded, because any changes made in that window would have no effect.

See also

CreateJavaVM
GetJavaClasspath
GetJavaVMVersion

About this chapter

This chapter describes the PowerBuilder extension classes used to connect to a SOAP server that hosts a Web service you want to access. It also describes the extension classes that enable you to search UDDI registries for a Web Service. For more information about working with Web services, see *Application Techniques*.

Contents

Topic	Page
SoapConnection	29
SoapException	34
UDDIProxy	36

SoapConnection

Description

The SoapConnection class is used to create a proxy object for a specific Web service and set options for the connection.

Methods

SoapConnection has the following methods:

- CreateInstance
- SetOptions
- SetProxyServerOptions

The GenerateProxy method is currently not implemented.

CreateInstance

Description

Creates a proxy instance with a default URL for a SOAP server, which comes from a user-supplied WSDL file. The client application must create a proxy instance before it can access a Web service.

Syntax

conn.CreateInstance (ref powerobject *proxy_obj*, string *proxy_name*, {string *portname*}) throws SoapException

Argument	Description
<i>conn</i>	The name of the SoapConnection object that establishes the connection
<i>proxy_obj</i>	The referenced name of your proxy object
<i>proxy_name</i>	The name of the proxy, based on the port name from a URL in the WSDL file stored in the proxy
<i>portname</i>	(Optional) The port name from a URL not stored in the proxy

Return value

Long. Valid values are:

Value	Description
0	Successful
100	Invalid proxy name
101	Failed to create proxy

Examples

Example 1 In this example, the client application creates a proxy instance to access the Web services at *http://my.server/soap/myport*. The proxy name "syb_myport" is generated by the Web Service Proxy wizard when you select "syb_" as a prefix for a service port (endpoint) called "myport".

```
syb_myport myproxy  
long ret
```

```
ret = Conn.CreateInstance(myproxy, "syb_myport",  
"http://my.server/soap/myport")
```

Example 2 The following script creates a connection to a Web service on a SOAP server. It sets the connection properties using an endpoint defined in the `CreateInstance` method. (If the endpoint is not defined in the `CreateInstance` method, a default URL stored in the proxy is used). The script uses the `SetOptions` method to specify a log file. It displays a return value in an application message box:

```
SoapConnection conn // Define SoapConnection  
syb_currencyexchangeport proxy_obj // Declare proxy  
long rVal, lLog  
real amount  
  
//Define endpoint. You can omit it, if you want to use  
//the default endpoint inside proxy
```

```
string str_endpoint

str_endpoint = "http://services.xmethods.net:80/soap"
conn = create SoapConnection //Instantiated connection

lLog = conn.SetOptions("SoapLog=~"C:\mySoapLog.log~")

// Set trace file to record soap interchange data,
// if string is "", disables the feature

rVal = Conn.CreateInstance(proxy_obj, &
    "syb_currencyexchangeport", str_endpoint)

// Create proxy object
try

    amount = proxy_obj.getrate("us","japan")
    // Invoke service
    messagebox("Current Exchange Rate", "One US Dollar"&
        + " is equal to " + string(amount) + " Japanese Yen")
catch ( SoapException e )
    messagebox ("Error", "Cannot invoke Web service")
    // error handling
end try
destroy conn
```

Usage After you instantiate a proxy, you are ready to call the SOAP methods you want from the associated Web service port.

See also [SetOptions](#)
[SetProxyServerOptions](#)

SetOptions

Description Sets connection options for SoapConnection class. The string values for the option names are not case sensitive.

Syntax *conn*.**SetOptions** (string *Options*)

Argument	Description
<i>conn</i>	The name of the SoapConnection object that establishes the connection.
<i>Options</i>	<p>Options you want to set for your connection. These can be:</p> <p>SoapLog (EasySoap Web service engine only) The file path for SoapLog. To disable the log, enter " ".</p> <p>UserID A string value for an https connection.</p> <p>Password A string value for an https connection.</p> <p>Domain (.NET Web service engine only) A string value for the Web domain to which the user belongs. This could be a domain name, such as "sybase.com", or a machine name.</p> <p>UseWindowsAuthentication (.NET Web service engine only) A "yes" or "no" value to determine whether to use "Integrated Windows Authentication." The value you enter can be a boolean or a string. If this option is set to "yes," you do not need to set the UserID, Password, or Domain options.</p> <p>AuthenticationMode (.NET Web service engine only) A string value for the authentication mode you want to use. This can be "basic" or "digest". AuthenticationMode values are described on the Microsoft MSDN Web site at http://msdn2.microsoft.com/en-us/library/w67h0dw7.aspx.</p> <p>CertificateFile (.NET Web service engine only) A string value for the certificate file or files that you want to send from the Web service client to the server. The string value could include local files with a full path and URLs to remote certificate files. You must use a semicolon as a separator for multiple files.</p> <p>Timeout A number for the maximum wait time in seconds. The default timeout value is 0, meaning that no limit to the connection time is set.</p> <p>ConnectionCache (EasySoap Web service engine only) A boolean that determines whether the http connection of the proxy instance is kept alive after a call to the proxy. The default value is false. For Web services on EAServer, you must not change the default.</p>

Return value Long. Valid values are 0 for success, and 50 for failure. If multiple options are specified and the return value is 50, options specified before the failure are still valid.

Examples In this example, the application enables the logging function and attempts to connect to an endpoint for which no user ID, password, or timeout has been set.

```
lOpt=Conn.SetOptions("SoapLog=~"airportweather.log~")
```


If you do not want to use escape characters before a second pair of quotation marks, you can use single quotation marks instead, or you can start an exterior string with single quotation marks and use double quotation marks around an interior string:

```
lOpt=Conn.SetOptions('SoapLog="airportweather.log"')
```

Usage

User ID and password values can be set in an endpoint used by the SoapConnection class or by including these values as arguments to the SetOptions method.

Priority is given to values set in an endpoint (port) that is passed as an argument to the CreateInstance method of the SoapConnection class. However, a default endpoint is used when an endpoint is not set in the CreateInstance method. In this case, priority is given to user ID and password values defined in the SetOptions method.

If the endpoint used by the SoapConnection class does not have user ID and password values, and you do not set a user ID or password with the SetOptions method, the SoapConnection class connects to a SOAP server without giving a user ID or password.

If a user ID is defined in either the endpoint or the SetOptions method but is not a password, the password value is taken to be an empty string.

When you set a timeout other than the default, an exception is thrown after the Web service connection times out. Even if you do not set a timeout value from the client, the Web server can still cause the request to time out on the server side.

If you include ConnectionCache as an argument in a SetOptions call, you must not use quotation marks to enclose the value that you set for this option.

See also

CreateInstance
SetProxyServerOptions

SetProxyServerOptions

Description Sets the proxy address, user name, and password for the proxy server.

Syntax `conn.SetProxyServerOptions (string optionstring)`

Argument	Description
<i>conn</i>	The name of the SoapConnection object that establishes the connection.

Argument	Description
<i>optionstring</i>	<p>A string containing comma-separated name/value pairs. The format is:</p> <pre>"address='proxy_endpoint '{, userID='name ', password='password'}"</pre> <p>The address is required and can have a format such as:</p> <pre>http://hostname:port/path</pre> <p>Specify values for userID and password if the proxy server requires them.</p>
Return value	Long. Valid values are 0 for success, and 50 for failure.
Examples	<p>This example specifies a user name and password, as well as the proxy endpoint:</p> <pre>long ll_return string ls_string ls_string = "address='http://Srvr:8080/endpnt', " ls_string += "userID='MyName', password='mypass' " ll_return = Conn.SetProxyServerOptions (ls_string)</pre>
Usage	Use this function if the proxy server requires authentication. The user ID and password you can supply with the SetOptions function apply to the URL of the service, not the proxy server.
See also	CreateInstance SetOptions

SoapException

Description

The SoapException class is a PBNI class that inherits from the PowerBuilder RuntimeError class. When an exception occurs in a Web service method call, it is converted into a SoapException and thrown. The methods of the classes in *PBSoapClient105.pbx* can also throw SoapException.

Properties

Exception property	Data type	Description
Text	String	Contains the text of the error message

Methods

The following table defines methods inherited by a SoapException object from the RuntimeError class.

Exception function	Data type returned	Description
GetMessage	String	Returns the error message from objects of type RuntimeError
SetMessage	—	Sets an error message for an object of type RuntimeError

Usage

The following example demonstrates how to use the SoapException class. The ServiceProxy fails to be invoked and returns the error message. The code has three catch clauses: for SoapException, PBXRuntimeError, and RuntimeError. PBXRuntimeError is an exception class that inherits from RuntimeError and is thrown when a PowerBuilder extension raises an error that is not caught by the extension.

```

string s1,s2
s1 = "abcd"
SoapConnection conn
long ret
ServiceProxy proxy

//ServiceProxy is a proxy generated by Web service
//wizard

try
    conn = create SoapConnection
    ret = conn.CreateInstance(proxy, "ServiceProxy")
    if (ret <> 0)then
        MessageBox("Fail", "Cannot create proxy " &
            + "ServiceProxy")
        return
    end if
    s2 = proxy.EchoString(s1)
    MessageBox("Successful", "The return string is '" &
        + s2 + "'")
catch (SoapException e1)
    MessageBox("Fail", "Can't invoke service
'EchoString'")
catch (PBXRuntimeError e2)
    MessageBox("Fail", "There is a runtime error when" &
        + "invoking Web service")
catch (RuntimeError e3)
    MessageBox("Fail", "There is an unknown error when"&
        + "invoking Web service")
end try

```

See also GetMessage in the *PowerScript Reference*
 RuntimeError object in *Objects and Controls*
 SetMessage in the *PowerScript Reference*

UDDIProxy

Description The UDDIProxy class is used to create a proxy object for a UDDI search and set options for that search.

Methods UDDIProxy has the following methods:

 setInquiryUrl
 setOption
 findBusiness
 getBusinessDetail
 findService

setInquiryUrl

Description Sets the UDDI inquiry URL.

Syntax *proxy.setinquiryurl* (readonly string *url*)

Argument	Description
<i>proxy</i>	The name of the UDDIProxy object
<i>url</i>	A valid UDDI inquiry URL

Return value Integer. Valid values are 1 for success, and 0 for failure.

Examples The following code sets the inquiry URL to a UDDI registry on the IBM Web site:

```
uddiproxy proxy
int ret
proxy = create uddiproxy
ret = proxy.setinquiryurl
      ("http://www-3.ibm.com/services/uddi/inquiryapi")
...//search processing
destroy proxy
```

setOption

Description Sets UDDI search options for match precision, case sensitivity, result sort order, and the maximum number of rows returned.

Syntax `proxy.setoption` (boolean *exactMatch*, boolean *caseSensitive*, integer *sort*, integer *maxRow*)

Argument	Description
<i>proxy</i>	The name of the UDDIProxy object.
<i>exactMatch</i>	If true, search returns exact matches only.
<i>caseSensitive</i>	If true, search result must match the case used by search key word.
<i>sort</i>	Determines whether or how search results are sorted. Values are: <ul style="list-style-type: none"> • -1 sorts results in descending order • 0 performs no sorting • 1 sorts results in ascending order
<i>maxRow</i>	Maximum number of items a search can return.

Return value Integer. Valid values are 1 for success, and 0 for failure.

Examples The following code sets options for case sensitivity and the maximum number of rows returned:

```
ret = proxy.setoption (false, true, 0, 5)
```

findBusiness

Description Finds business items using business names in a UDDI search.

Syntax `proxy.findBusiness` (readonly string *businessName*, ref integer *count*, ref string *busNameResult* [], ref string *busDescriptionResult* [], ref string *busKeyResult* [])

Argument	Description
<i>proxy</i>	The name of the UDDIProxy object
<i>businessName</i>	Business name to search in UDDI registry
<i>count</i>	Number of search results returned; never larger than the <i>maxRow</i> input parameter in a corresponding <code>setOption</code> call
<i>busNameResult</i>	Array of business names matching the search criteria
<i>busDescriptionResult</i>	Array of descriptions for businesses matching the search criteria
<i>busKeyResult</i>	Array of globally unique identifiers (GUIDs) for each business matching the search criteria

Return value Integer. Valid values are 1 for success, and 0 for failure.

Examples The following code finds business names, descriptions, and keys in the IBM UDDI registry:

```
uddiproxy proxy
proxy = create uddiproxy
int count
string businessName[], businessDescription[]
string businessKey []
proxy.findbusiness("IBM", count, businessName, &
    businessDescription, businessKey)
```

getBusinessDetail

Description Gets business details using a business key that is typically obtained from the findBusiness function.

Syntax *proxy*.**getBusinessDetail** (readonly string *businessKey*, ref integer *count*, ref string *serviceNameResult* [], ref string *serviceDescriptionResult* [], ref string *serviceKeyResult* [], ref string *wsdl* [])

Argument	Description
<i>proxy</i>	The name of the UDDIProxy object
<i>businessKey</i>	Business key to search in UDDI registry
<i>count</i>	Number of search results returned; never larger than the <i>maxRow</i> input parameter in a corresponding <i>setOption</i> call
<i>serviceNameResult</i>	Array of services matching the search criteria
<i>serviceDescriptionResult</i>	Array of descriptions for services matching the search criteria
<i>serviceKeyResult</i>	Array of globally unique identifiers (GUIDs) for each service matching the search criteria
<i>wsdl</i>	Array of WSDL file names for services matching search criteria

Return value Integer. Valid values are 1 for success, and 0 for failure.

Examples The following code gets business details from business keys obtained by a findBusiness call on an instantiated uddiproxy object (*proxy*):

```
int i, count, count2
string businessName[], businessDescription[]
string businessKey []
string serviceName[], serviceDescription[]
```

```

string serviceKey [], wsd1 [ ]
...//set search options and inquiry URL
proxy.findbusiness ("IBM", count, businessName, &
    businessDescription, businessKey)
FOR i = 1 TO count
    proxy.getbusinessdetail (businessKey [i], count2, &
        serviceName, serviceDescription, serviceKey, wsd1)
    ...//call findService in secondary FOR/NEXT loop
NEXT

```

findService

Description Finds service details using a service name.

Syntax `proxy.findService` (readonly string *serviceName*, ref integer *count*, ref string *serviceNameResult* [], ref string *serviceDescriptionResult* [], ref string *serviceKeyResult* [], ref string *busNameResult* [], ref string *wsdl* [])

Argument	Description
<i>proxy</i>	The name of the UDDIProxy object
<i>serviceName</i>	Service name to search in UDDI registry
<i>count</i>	Number of search results returned; never larger than the <i>maxRow</i> input parameter in a corresponding <i>setOption</i> call
<i>serviceNameResult</i>	Array of services matching the search criteria
<i>serviceDescriptionResult</i>	Array of descriptions for services matching the search criteria
<i>serviceKeyResult</i>	Array of globally unique identifiers (GUIDs) for each service matching the search criteria
<i>busNameResult</i>	Array of business names matching the search criteria
<i>wsdl</i>	Array of WSDL file names for services matching search criteria

Return value Integer. Valid values are 1 for success, and 0 for failure.

Examples The following code gets service details for the “Weather” service using an instantiated uddiproxy object (*proxy*):

```

int ret, count
string serviceName[], serviceDescription[]
string serviceKey [], businessName [], wsd1 [ ]
ret = proxy.findService("Weather", count, serviceName,&
    serviceDescription, serviceKey, businessName, wsd1)

```


PowerBuilder Document Object Model

About this chapter

This chapter presents an overview of the PowerBuilder Document Object Model (PBDOM). For more information about using PBDOM, see the chapter on using XML services in *Application Techniques*.

Contents

Topic	Page
About PBDOM	41
PBDOM objects	43

About PBDOM

PBDOM is the PowerBuilder implementation of the Document Object Model (DOM), a programming interface defining the means by which XML documents can be accessed and manipulated.

Although PBDOM is not an implementation of the World Wide Web Consortium (W3C) DOM API, it is very similar. The PBDOM PowerBuilder API can be used for reading, writing, and manipulating standard-format XML from within PowerScript code. PBDOM portrays an XML document as a collection of interconnected objects and provides intuitive methods indicating the use and functionality of each object.

PBDOM is also similar to JDOM, which is a Java-based document object model for XML files.

For more information about W3C DOM, go to the W3C Document Object Model Web site at <http://www.w3.org/DOM/>. For more information about JDOM, go to the JDOM Web site at <http://www.jdom.org>.

Node trees

PBDOM interacts with XML documents according to a tree-view model consisting of parent and child nodes. A document element represents the top-level node of a standalone XML document. This element has one or many child nodes that represent the branches of the tree. You access nodes in the node tree through the appropriate class methods.

XML parser

The PBDOM XML parser is used to load and parse an XML document, and also to generate XML based on user-specified DOM nodes.

PBDOM provides the methods you need to traverse the node tree, access the nodes and attribute values (if any), insert and delete nodes, and serialize the node tree back to XML.

Objects and methods

The PBDOM object hierarchy is described in "PBDOM objects" next. The methods for each object are described in the following chapters. The chapters are arranged in alphabetical order for ease of reference.

Chapter 18, "PBDOM Summary," provides quick reference tables showing the signatures of the methods defined in each PBDOM object. The tables are arranged in an order that reflects the object hierarchy shown in "Object hierarchy" on page 44.

PBDOM objects

PBDOM_OBJECT, the base class for PBDOM objects that represent XML nodes, inherits from the PowerBuilder NonVisualObject class. PBDOM represents node types by the following classes:

- PBDOM_ATTRIBUTE
- PBDOM_CDATA
- PBDOM_CHARACTERDATA
- PBDOM_COMMENT
- PBDOM_DOCTYPE
- PBDOM_DOCUMENT
- PBDOM_ELEMENT
- PBDOM_ENTITYREFERENCE
- PBDOM_PROCESSINGINSTRUCTION
- PBDOM_TEXT

You use methods from these classes to access objects in a PBDOM node tree.

The PBDOM_BUILDER class does not represent DOM nodes but can be used to build a PBDOM object tree from XML. It inherits from the PowerBuilder NonVisualObject class.

The PBDOM_EXCEPTION class inherits from the PowerBuilder Exception class and provides a method that obtains error codes.

Each of these classes and their methods are described in the chapters that follow.

Comparing PBDOM
objects with W3C
DOM and JDOM
objects

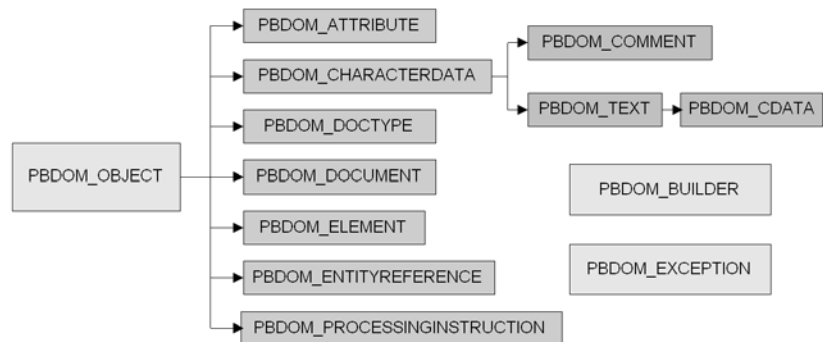
The following table shows the W3C DOM and JDOM objects that correspond to each PBDOM object that represents a node in the DOM tree. Note that although these W3C DOM and JDOM objects correspond to PBDOM objects, they are not equivalent to the PBDOM objects.

Table 4-1: W3C DOM and JDOM objects that correspond to PBDOM objects

PBDOM	W3C DOM	JDOM
PBDOM_ATTRIBUTE	ATTRIBUTE_NODE	Attribute
PBDOM_BUILDER	None	DOMBuilder
PBDOM_CDATA	CDATA_SECTION_NODE	CDATA
PBDOM_CHARACTERDATA	CHARACTER_DATA_NODE	None
PBDOM_COMMENT	COMMENT_NODE	Comment
PBDOM_DOCUMENT	DOCUMENT_NODE	Document
PBDOM_DOCTYPE	DOCUMENT_TYPE_NODE	DocType
PBDOM_ELEMENT	ELEMENT_NODE	Element
PBDOM_ENTITYREFERENCE	ENTITY_REFERENCE_NODE	EntityRef
PBDOM_OBJECT	NODE	None
PBDOM_PROCESSINGINSTRUCTION	PROCESSING_INSTRUCTION_NODE	Processinginstruction
PBDOM_TEXT	TEXT_NODE	Text

Object hierarchy

The W3C DOM and JDOM object hierarchies also differ from the PBDOM object hierarchy, which is shown in the following illustration.

Figure 4-1: The PBDOM object hierarchy

For more information about working with PBDOM, see the chapter on PowerBuilder XML services in *Application Techniques*.

About this chapter

This chapter describes the PBDOM_ATTRIBUTE class.

PBDOM_ATTRIBUTE

Description

The PBDOM_ATTRIBUTE class defines the behavior for an XML attribute, modeled in PowerScript. Its methods allow you to obtain the value of the attribute as well as namespace information.

A PBDOM_ATTRIBUTE contains a subtree of child PBDOM_OBJECTS. These children can be a combination of PBDOM_TEXT and PBDOM_ENTITYREFERENCE objects.

PBDOM_ATTRIBUTE has no parent.

A PBDOM_ATTRIBUTE does not have a parent. However, it does have an owner PBDOM_ELEMENT. Use the `GetOwnerElementObject` and `SetOwnerElementObject` to get and set the owner.

For more information about the PBDOM_ATTRIBUTE object, including its default PBDOM_TEXT object and its behavior with respect to XML namespaces, see the chapter on using XML services in *Application Techniques*.

Methods

Some of the inherited methods from PBDOM_OBJECT serve no meaningful objective and only default or trivial functionalities result. These are described in the following table:

Method	Always returns
<code>GetParentObject</code>	null
<code>SetParentObject</code>	The current PBDOM_ATTRIBUTE, returned unmodified as a PBDOM_OBJECT

PBDOM_ATTRIBUTE has the following methods:

- AddContent
- Clone
- Detach
- Equals
- GetBooleanValue
- GetContent
- GetDateValue
- GetDateTimeValue
- GetDoubleValue
- GetIntValue
- GetLongValue
- GetName
- GetNamespacePrefix
- GetNamespaceUri
- GetObjectClass
- GetObjectClassString
- GetOwnerDocumentObject
- GetOwnerElementObject
- GetQualifiedName
- GetRealValue
- GetText
- GetTextNormalize
- GetTextTrim
- GetUIntValue
- GetTimeValue
- GetUlongValue
- HasChildren
- InsertContent
- IsAncestorObjectOf
- RemoveContent
- SetBooleanValue
- SetContent
- SetDateValue
- SetDateTimeValue
- SetDoubleValue
- SetIntValue
- SetLongValue
- SetName
- SetNamespace
- SetOwnerElementObject
- SetRealValue

SetText
 SetTimeValue
 SetUIntValue
 SetUlongValue

AddContent

Description	Adds the input PBDOM_OBJECT as a child of the PBDOM_ATTRIBUTE.						
Syntax	<i>pbdom_attribute_name</i> .AddContent(<i>pbdom_object</i> <i>pbdom_object_ref</i>)						
	<table> <tr> <th>Argument</th><th>Description</th></tr> <tr> <td><i>pbdom_attribute_name</i></td><td>The name of the PBDOM_ATTRIBUTE</td></tr> <tr> <td><i>pbdom_object_ref</i></td><td>The PBDOM_OBJECT to add</td></tr> </table>	Argument	Description	<i>pbdom_attribute_name</i>	The name of the PBDOM_ATTRIBUTE	<i>pbdom_object_ref</i>	The PBDOM_OBJECT to add
Argument	Description						
<i>pbdom_attribute_name</i>	The name of the PBDOM_ATTRIBUTE						
<i>pbdom_object_ref</i>	The PBDOM_OBJECT to add						
Return value	PBDOM_OBJECT. The PBDOM_ATTRIBUTE modified.						
Throws	EXCEPTION_INAPPROPRIATE_USE_OF_PBDOM_OBJECT – If the input PBDOM_OBJECT is not a PBDOM_TEXT or PBDOM_ENTITYREFERENCE object. EXCEPTION_USE_OF_UNNAMED_OBJECT – If the input PBDOM_OBJECT has not been given a user-defined name.						
Usage	<i>pbdom_object_ref</i> must be a reference to a PBDOM_TEXT or PBDOM_ENTITYREFERENCE object.						
See also	GetContent InsertContent RemoveContent SetContent						

Clone

Description	Creates a clone of the PBDOM_ATTRIBUTE object.						
Syntax	<i>pbdom_attribute_name</i> .Clone(boolean <i>bDeep</i>)						
	<table> <tr> <th>Argument</th><th>Description</th></tr> <tr> <td><i>pbdom_attribute_name</i></td><td>The name of the PBDOM_ATTRIBUTE.</td></tr> <tr> <td><i>bDeep</i></td><td>A boolean specifying whether a deep or shallow clone is returned. Values are true for a deep clone and false for a shallow clone.</td></tr> </table>	Argument	Description	<i>pbdom_attribute_name</i>	The name of the PBDOM_ATTRIBUTE.	<i>bDeep</i>	A boolean specifying whether a deep or shallow clone is returned. Values are true for a deep clone and false for a shallow clone.
Argument	Description						
<i>pbdom_attribute_name</i>	The name of the PBDOM_ATTRIBUTE.						
<i>bDeep</i>	A boolean specifying whether a deep or shallow clone is returned. Values are true for a deep clone and false for a shallow clone.						

Return value	PBDOM_OBJECT. A clone of this PBDOM_ATTRIBUTE returned as a PBDOM_OBJECT.
Throws	<p>EXCEPTION_PBDOM_OBJECT_INVALID_FOR_USE – This PBDOM_ATTRIBUTE object's internal implementation is null. The occurrence of this exception is rare but can take place if severe memory corruption occurs.</p> <p>EXCEPTION_USE_OF_UNNAMED_PBDOM_OBJECT – If this PBDOM_ATTRIBUTE does not have or has not been assigned a user-defined name.</p>
Examples	<p>This example creates a PBDOM_DOCUMENT from the string <abc My_Attr="An Attribute"/>, gets the attribute from the root element, and creates a shallow clone and a deep clone from it. For the shallow clone, an empty string is returned in the message box. For the deep clone, the string An Attribute is returned:</p>

```
PBDOM_BUILDER      pbdom_buildr
PBDOM_DOCUMENT     pbdom_doc
PBDOM_ATTRIBUTE    pbdom_attr
PBDOM_ATTRIBUTE    pbdom_attr_clone_deep
PBDOM_ATTRIBUTE    pbdom_attr_clone_shallow
string strXML = "<abc My_Attr=~\"An Attribute~\"/>"

TRY
    pbdom_buildr = Create PBDOM_BUILDER
    pbdom_doc = pbdom_buildr.BuildFromString(strXML)

    pbdom_attr = pbdom_doc.GetRootElement(). &
        GetAttribute("My_Attr")

    pbdom_attr_clone_shallow = pbdom_attr.Clone(false)
    MessageBox ("Shallow Attribute Clone Text", &
        pbdom_attr_clone_shallow.GetText())

    pbdom_attr_clone_deep = pbdom_attr.Clone(true)
    MessageBox ("Deep Attribute Clone Text", &
        pbdom_attr_clone_deep.GetText())

CATCH (PBDOM_EXCEPTION pbdom_except)
    MessageBox ("PBDOM_EXCEPTION", &
        pbdom_except.GetMessage())
END TRY
```


Usage

The Clone method creates and returns a duplicate of the current PBDOM_ATTRIBUTE.

If a shallow clone is requested, this method clones the original PBDOM_ATTRIBUTE together with its namespace information values. The subtree of child PBDOM_TEXT and/or PBDOM_ENTITYREFERENCE objects is not cloned.

If a deep clone is requested, this method additionally recursively clones the subtree under the PBDOM_ATTRIBUTE. This subtree consists of a combination of PBDOM_TEXT and PBDOM_ENTITYREFERENCE objects that are the legal children of a PBDOM_ATTRIBUTE.

A PBDOM_ATTRIBUTE clone has no parent. However, the clone resides in the same PBDOM_DOCUMENT as its original, and if the original PBDOM_ATTRIBUTE is standalone, the clone is standalone.

Detach

Description

Detaches a PBDOM_ATTRIBUTE from its owner PBDOM_OBJECT, a PBDOM_ELEMENT.

Syntax

```
pbdom_attribute_name.Detach()
```

Argument	Description
<i>pbdom_attribute_name</i>	The name of the PBDOM_ATTRIBUTE

Return value

PBDOM_OBJECT. The PBDOM_ATTRIBUTE object detached from its owner object.

Throws

EXCEPTION_PBDOM_OBJECT_INVALID_FOR_USE – This PBDOM_ATTRIBUTE object's internal implementation is null. The occurrence of this exception is rare but can take place if severe memory corruption occurs.

Examples

The Detach method can be used to manipulate an XML document as follows:

```
PBDOM_BUILDER          pbdombuilder_new
PBDOM_DOCUMENT          pbdom_doc
PBDOM_ATTRIBUTE         pbdom_attr
PBDOM_ELEMENT           pbdom_elem
string strXML = "<abc  My_Attr=~"My Attribute
Value~"><data>Data</data></abc>"
```

```
TRY
    pbdombuilder_new = Create PBDOM_Builder
    pbdom_doc = pbdombuilder_new.BuildFromString (strXML)

    pbdom_attr = pbdom_doc.GetRootElement(). &
        GetAttribute("My_Attr")
    pbdom_attr.Detach()

    pbdom_elem = pbdom_doc.GetRootElement(). &
        GetChildElement("data")
    pbdom_elem.SetAttribute (pbdom_attr)

    Destroy pbdombuilder_new
    Destroy pbdom_doc

CATCH (PBDOM_Exception except)
    MessageBox ("Exception Occurred", except.Text)
END TRY
```

Here, the PBDOM_Builder BuildFromString method is used to create the following PBDOM_DOCUMENT object, pbdom_doc, using an XML string:

```
<abc My_Attr="My Attribute Value">
    <data>Data </data>
</abc>
```

The GetAttribute method is used to obtain the attribute from the root element of pbdom_doc. This value is assigned to the PBDOM_ATTRIBUTE object pbdom_attr. The pbdom_attr object is detached from its parent element, and the data element is obtained from pbdom_doc using the GetChildElement method. The data element is then assigned to the PBDOM_ELEMENT object pbdom_elem. The attribute assigned to pbdom_attr is assigned to pbdom_elem, yielding the following modified pbdom_doc:

```
<abc>
    <data My_Attr="My Attribute Value">Data</data>
</abc>
```

Usage

If the PBDOM_ATTRIBUTE object has no owner PBDOM_ELEMENT, the Detach method does nothing.

Equals

Description	Tests for equality between the supplied PBDOM_OBJECT and the PBDOM_ATTRIBUTE from which the method is invoked.						
Syntax	<i>pbdom_attribute_name</i> .Equals(<i>pbdom_object pbdom_object_ref</i>) <table border="1"> <thead> <tr> <th>Argument</th><th>Description</th></tr> </thead> <tbody> <tr> <td><i>pbdom_attribute_name</i></td><td>The name of the PBDOM_ATTRIBUTE</td></tr> <tr> <td><i>pbdom_object_ref</i></td><td>A PBDOM_OBJECT to be compared</td></tr> </tbody> </table>	Argument	Description	<i>pbdom_attribute_name</i>	The name of the PBDOM_ATTRIBUTE	<i>pbdom_object_ref</i>	A PBDOM_OBJECT to be compared
Argument	Description						
<i>pbdom_attribute_name</i>	The name of the PBDOM_ATTRIBUTE						
<i>pbdom_object_ref</i>	A PBDOM_OBJECT to be compared						
Return value	Boolean. Returns true if the current PBDOM_ATTRIBUTE is equivalent to the input PBDOM_OBJECT and false otherwise.						
Throws	<p>EXCEPTION_USE_OF_UNNAMED_PBDOM_OBJECT – If this PBDOM_ATTRIBUTE does not have or has not been assigned a user-defined name.</p> <p>EXCEPTION_PBDOM_OBJECT_INVALID_FOR_USE – if the input PBDOM_OBJECT is not a reference to an object derived from PBDOM_OBJECT.</p>						
Examples	Example 1 The following code uses the Equals method to test for equivalence between a referenced PBDOM_OBJECT and a cloned object.						

```

pbdom_attr = Create PBDOM_Attribute
pbdom_attr.SetName("My_Attr")
pbdom_attr_clone = pbdom_attr.Clone(true)

if (pbdom_attr_clone.Equals(pbdom_attr)) then
    MessageBox ("Equals", "Yes")
else
    MessageBox ("Equals", "No")
end if

```

The SetName method names the newly created PBDOM_ATTRIBUTE, which is subsequently cloned with the Clone method. The Equals method tests for equality between the cloned PBDOM_ATTRIBUTE pbdom_attr_clone and the referenced PBDOM_OBJECT pbdom_attr. A message box displays the result returned from the Equals method.

Note here that because a cloned object is never equivalent to the object from which it is cloned, the Equals method returns false.

Example 2 The following code uses the Equals method to test for equivalence between two cloned objects.

```

pbdom_attr = Create PBDOM_Attribute
pbdom_attr.SetName("My_Attr")

```

```
pbdom_attr_clone = pbdom_attr.Clone(true)
pbdom_attr_2 = pbdom_attr_clone

if (pbdom_attr_clone.Equals(pbdom_attr_2)) then
    MessageBox ("Equals", "Yes")
else
    MessageBox ("Equals", "No")
end if
```

A newly created PBDOM_ATTRIBUTE is cloned, and a reference to this clone is assigned to pbdom_attr_2. The Equals method tests for equality between the cloned PBDOM_ATTRIBUTE pbdom_attr_clone and the reference to it, pbdom_attr_2. A message box displays the result returned from the Equals method.

Here the Equals method returns true.

Usage Note that the clone of a PBDOM_ATTRIBUTE is not considered equal to itself.

GetBooleanValue

Description Obtains the value of a PBDOM_ATTRIBUTE object in boolean form.

Syntax pbdom_attribute_name.GetBooleanValue()

Argument	Description
pbdom_attribute_name	The name of the PBDOM_ATTRIBUTE

Return value Boolean.

The following table lists the PBDOM_ATTRIBUTE string values that are accepted as boolean and the corresponding return values from the GetBooleanValue method.

PBDOM_ATTRIBUTE string value	GetBooleanValue
1	true
0	false
TRUE	true
FALSE	false
ON	true
OFF	false
YES	true
NO	false

Strings are treated without case sensitivity. If no conversion can occur, the `GetBooleanValue` method throws an exception.

Throws

EXCEPTION_DATA_CONVERSION – If data conversion fails.

Examples

The `GetBooleanValue` can be used to evaluate a `PBDOM_ATTRIBUTE` object as follows:

```
PBDOM_BUILDER          pbombuilder_new
PBDOM_DOCUMENT          pbdom_doc
PBDOM_ATTRIBUTE          pbdom_attr
string strXML = "<abc My_Boolean_Attribute
=~\"on~\"><data
An_Attribute=~\"Some Text~\">Data</data></abc>"

TRY
    pbdombuilder_new = Create PBDOM_Builder
    pbdom_doc = pbdombuilder_new.BuildFromString (strXML)

    pbdom_attr = pbdom_doc.GetRootElement(). &
        GetAttribute("My_Boolean_Attribute")

    MessageBox ("Boolean Value", &
        string(pbdom_attr.GetBooleanValue()))

    Destroy pbdombuilder_new
    Destroy pbdom_doc
CATCH (PBDOM_Exception except)
    MessageBox ("Exception Occurred", except.Text)
END TRY
```

The `BuildFromString` method is used to create a `PBDOM_DOCUMENT` object, `pbdom_doc`, using an XML string. The attribute value of the root element of `pbdom_doc` is assigned to the `PBDOM_ATTRIBUTE` object `pbdom_attr`. The attribute value, `on`, is evaluated with the `GetBooleanValue` method. A message box reports the return value of the `GetBooleanValue` method.

See also

`SetBooleanValue`

GetContent

Description

Returns an array of `PBDOM_OBJECT` objects that are the children of the `PBDOM_ATTRIBUTE`. The children of a `PBDOM_ATTRIBUTE` can be only `PBDOM_TEXT` or `PBDOM_ENTITYREFERENCE` objects.

Syntax

pbdom_attribute_name.GetContent(ref pbdom_object pbdom_object_array[])

Argument	Description
<i>pbdom_attribute_name</i>	The name of the PBDOM_ATTRIBUTE
<i>pbdom_object_array</i>	The referenced name of an array of PBDOM_OBJECTs that receives PBDOM_OBJECTs

Return value Boolean. This method always returns true.

See also
AddContent
InsertContent
RemoveContent
SetContent

GetDateValue

Description Returns the value of a PBDOM_ATTRIBUTE object as type Date.

Syntax *pbdom_attribute_name*.GetDateValue(string *strDateFormat*)

Argument	Description
<i>pbdom_attribute_name</i>	The name of the PBDOM_ATTRIBUTE
<i>strDateFormat</i>	The date format for the return value, for example, MM:DD:YYYY

The value of the *strDateFormat* parameter can use slashes or colons as delimiters. The following table illustrates characters with special meaning in *strDateFormat*.

Character	Meaning	Example
D	Day number with no leading zero	5
DD	Day number with leading zero, if applicable	05
M	Month number with no leading zero	5
MM	Month number with leading zero, if applicable	05
YY	Two-digit year number	05
YYYY	Four-digit year number	2005

Return value Date.

Throws EXCEPTION_DATA_CONVERSION – If data conversion fails.

See also SetDateValue

GetDateTimeValue

Description Returns the value of a PBDOM_ATTRIBUTE object as type DateTime.

Syntax `pbdom_attribute_name.GetDateTimeValue(string strDateFormat, string strTimeFormat)`

Argument	Description
<i>pbdom_attribute_name</i>	The name of the PBDOM_ATTRIBUTE
<i>strDateFormat</i>	The date format for the return value, for example, MM:DD:YYYY
<i>strTimeFormat</i>	The time format for the return value, for example, HH:MM:SS

The value of the *strDateFormat* parameter can use slashes or colons as delimiters. The following table illustrates characters that have special meaning in *strDateFormat*.

Character	Meaning	Example
D	Day number with no leading zero	5
DD	Day number with leading zero, if applicable	05
M	Month number with no leading zero	5
MM	Month number with leading zero, if applicable	05
YY	Two-digit year number	05
YYYY	Four-digit year number	2005

The value of the *strTimeFormat* parameter can use slashes or colons as delimiters. The following table illustrates characters that have special meaning in *strTimeFormat*.

Character	Meaning	Example
H	Hour number with no leading zero	5
HH	Hour number with leading zero, if applicable	05
M	Minutes number with no leading zero	5
MM	Minutes number with leading zero, if applicable	05
S	Seconds number with no leading zero	5
SS	Seconds number with leading zero, if applicable	55

Return value DateTime.

Throws EXCEPTION_DATA_CONVERSION – If data conversion fails.

See also SetDateTimeValue

GetDoubleValue

Description Returns the value of a PBDOM_ATTRIBUTE object in double form.

Syntax *pbdom_attribute_name*.GetDoubleValue()

Argument	Description
<i>pbdom_attribute_name</i>	The name of the PBDOM_ATTRIBUTE

Return value Double.

Throws EXCEPTION_DATA_CONVERSION – If data conversion fails.

Usage Throws exception_data_conversion if the method fails to convert data.

See also SetDoubleValue

GetIntValue

Description Returns the value of a PBDOM_ATTRIBUTE object as type int.

Syntax *pbdom_attribute_name*.GetIntValue()

Argument	Description
<i>pbdom_attribute_name</i>	The name of the PBDOM_ATTRIBUTE

Return value Int.

Throws EXCEPTION_DATA_CONVERSION – If data conversion fails.

See also SetIntValue

GetLongValue

Description Returns the value of a PBDOM_ATTRIBUTE object as type long.

Syntax *pbdom_attribute_name*.GetLongValue()

Argument	Description
<i>pbdom_attribute_name</i>	The name of the PBDOM_ATTRIBUTE

Return value Long.

Throws EXCEPTION_DATA_CONVERSION – If data conversion fails.

See also SetLongValue

GetName

Description Retrieves the local name of the PBDOM_ATTRIBUTE object.

Syntax `pbdom_attribute_name.GetName()`

Argument	Description
<code>pbdom_attribute_name</code>	The name of the PBDOM_ATTRIBUTE

Return value String.

Throws EXCEPTION_USE_OF_UNNAMED_PBDOM_OBJECT – If this PBDOM_ATTRIBUTE does not have or has not been assigned a user-defined name.

Examples **Example 1** When the GetName method is invoked for the attribute name in the following element, it returns the string ATTRIBUTE_1:

```
<abc ATTRIBUTE_1="My Attribute">
```

Example 2 When the GetName method is invoked for the name of the eMusic:Type attribute in the following element, it returns the string Type:

```
<eMusic:CD
  xmlns:eMusic="http://www.eMusic_Records.com"
  eMusic:Type="Jazz"/>
```

The namespace prefix is not part of the return string.

Usage For an XML attribute that appears in the form `[namespace_prefix]:[attribute_name]`, the local attribute name is `attribute_name`. Where the XML attribute has no namespace prefix, the local name is simply the attribute name.

Use the GetNamespacePrefix method to obtain the namespace prefix for a PBDOM_ATTRIBUTE object. Use the GetQualifiedName method to obtain the fully qualified name for a PBDOM_ATTRIBUTE object.

See also GetNamespacePrefix
GetNamespaceUri
GetQualifiedName
SetName
SetNamespace

GetNamespacePrefix

Description Obtains the namespace prefix of a PBDOM_ATTRIBUTE object. The GetNamespacePrefix method returns an empty string if the PBDOM_ATTRIBUTE has no namespace.

Syntax *pbdom_attribute_name*.GetNamespacePrefix()

Argument	Description
<i>pbdom_attribute_name</i>	The name of the PBDOM_ATTRIBUTE

Return value String

For a PBDOM_ATTRIBUTE object that has the form [*namespacePrefix*]:[*attributeName*], the namespace prefix is [*namespacePrefix*].

See also GetNamespaceUri
GetQualifiedName
SetName
SetNamespace

GetNamespaceUri

Description Obtains the namespace URI of a PBDOM_ATTRIBUTE object. The GetNamespaceUri method returns an empty string if the PBDOM_ATTRIBUTE has no namespace.

Syntax *pbdom_attribute_name*.GetNamespaceUri()

Argument	Description
<i>pbdom_attribute_name</i>	The name of the PBDOM_ATTRIBUTE

Return value String.

See also GetNamespacePrefix
GetQualifiedName
SetName
SetNamespace

GetObjectClass

Description	Returns a long integer code that indicates the class of the current PBDOM_OBJECT.				
Syntax	<i>pbdom_object_name</i> .GetObjectClass() <table> <tr> <th>Argument</th><th>Description</th></tr> <tr> <td><i>pbdom_object_name</i></td><td>The name of a PBDOM_OBJECT</td></tr> </table>	Argument	Description	<i>pbdom_object_name</i>	The name of a PBDOM_OBJECT
Argument	Description				
<i>pbdom_object_name</i>	The name of a PBDOM_OBJECT				
Return value	Long. GetObjectClass returns a long integer code that indicates the class of the current PBDOM_OBJECT. If <i>pbdom_object_name</i> is a PBDOM_ATTRIBUTE, the returned value is 5.				
Examples	<p>This example illustrates polymorphism: <i>pbdom_obj</i> is declared as PBDOM_OBJECT but instantiated as PBDOM_ATTRIBUTE. A message box returns the result of the GetObjectClass method invoked for PBDOM_ATTRIBUTE. Here the result is 5, indicating that <i>pbdom_obj</i> is a PBDOM_ATTRIBUTE object.</p> <pre>PBDOM_OBJECT pbdom_obj pbdom_obj = Create PBDOM_ATTRIBUTE MessageBox ("Class", & string(pbdom_obj.GetObjectClass()))</pre>				
Usage	This method can be used for diagnostic purposes to dynamically determine the type of a PBDOM_OBJECT at runtime.				
See also	GetObjectClassString				

GetObjectClassString

Description	Returns a string form of the class of the PBDOM_OBJECT.				
Syntax	<i>pbdom_object_name</i> .GetObjectClassString() <table> <tr> <th>Argument</th><th>Description</th></tr> <tr> <td><i>pbdom_object_name</i></td><td>The name of a PBDOM_OBJECT</td></tr> </table>	Argument	Description	<i>pbdom_object_name</i>	The name of a PBDOM_OBJECT
Argument	Description				
<i>pbdom_object_name</i>	The name of a PBDOM_OBJECT				
Return value	String. GetObjectClassString returns a string that indicates the class of the current PBDOM_OBJECT. If <i>pbdom_object_name</i> is a PBDOM_ATTRIBUTE, the returned string is “pbdom_attribute”.				
Examples	The GetObjectClass method returns a string specific to the class of the object from which the method is invoked.				

This example illustrates polymorphism: `pbdom_obj` is declared as `PBDOM_OBJECT` but instantiated as `PBDOM_ATTRIBUTE`. A message box returns the result of the `GetObjectClassString` method invoked for `PBDOM_ATTRIBUTE`. Here the result is `pbdom_attribute`, indicating that `pbdom_obj` is a `PBDOM_ATTRIBUTE` object.

```
PBDOM_OBJECT pbdom_obj

pbdom_obj = Create PBDOM_ATTRIBUTE
MessageBox ("Class", pbdom_obj.GetObjectClassString())
```

- Usage
- This method can be used for diagnostic purposes to dynamically determine the actual type of a `PBDOM_OBJECT` at runtime.
- See also
- `GetObjectClass`

GetOwnerDocumentObject

Description

Returns the `PBDOM_DOCUMENT` object that owns the `PBDOM_ATTRIBUTE`.

Syntax

Argument

pbdom_attribute_name

Description

The name of the `PBDOM_ATTRIBUTE`

pbdom_attribute_name.GetOwnerDocumentObject()

Return value

PBDOM_DOCUMENT. The `PBDOM_DOCUMENT` that owns the `PBDOM_ATTRIBUTE` object from which the `GetOwnerDocumentObject` method is invoked.

A return value of null indicates the `PBDOM_ATTRIBUTE` object is not owned by any `PBDOM_DOCUMENT`.

Examples

The `GetOwnerDocumentObject` method can be used to identify the `PBDOM_DOCUMENT` object that owns a `PBDOM_ATTRIBUTE` object.

Here, the `BuildFromString` method is used to create the following `PBDOM_DOCUMENT` object, `pbdom_doc`, using an XML string:

```
<abc My_Attr="My Attribute Value">
  <data>Data </data>
</abc>
```

The `GetAttribute` method is used to obtain the attribute from the root element of `pbdom_doc`. This value is assigned to the `PBDOM_ATTRIBUTE` object `pbdom_attr`. The `GetOwnerDocumentObject` method is used to obtain the `pbdom_doc` that owns `pbdom_attr`. The result of the `GetOwnerDocumentObject` method is assigned to the `PBDOM_DOCUMENT` object `pbdom_doc_2`. Then `pbdom_doc_2` is compared to `pbdom_doc` using the `Equals` method, and the result is displayed in a message box.

```
PBDOM_Builder pbdombuilder_new
pbdom_document pbdom_doc
pbdom_document pbdom_doc_2
PBDOM_ATTRIBUTE pbdom_attr
string strXML = "<abc My_Attr=~\"My Attribute
Value~\"><data>Data </data></abc>"

TRY
    pbdombuilder_new = Create PBDOM_Builder
    pbdom_doc = pbdombuilder_new.BuildFromString (strXML)

    pbdom_attr = pbdom_doc.GetRootElement(). &
        GetAttribute("My_Attr")
    pbdom_doc_2 = pbdom_attr.GetOwnerDocumentObject()

    if (pbdom_doc.Equals(pbdom_doc_2)) then
        MessageBox ("Equals", "pbdom_doc equals " &
            + "pbdom_attr.GetOwnerDocumentObject()")
    end if

    Destroy pbdombuilder_new

CATCH (PBDOM_Exception except)
    MessageBox ("Exception Occurred", except.Text)
END TRY
```

See also

`GetOwnerElementObject`
`SetOwnerElementObject`

GetOwnerElementObject

Description Returns the owner PBDOM_ELEMENT of this PBDOM_ATTRIBUTE. If there is no owner element, null is returned.

Syntax *pbdom_attribute_name*.GetOwnerElementObject()

Argument	Description
<i>pbdom_attribute_name</i>	The name of the PBDOM_ATTRIBUTE

Return value PBDOM_ELEMENT. The owner PBDOM_ELEMENT of this PBDOM_ATTRIBUTE or null if this PBDOM_ATTRIBUTE has no owner element.

Throws EXCEPTION_PBDOM_OBJECT_INVALID_FOR_USE – This PBDOM_ATTRIBUTE object's internal implementation is null. The occurrence of this exception is rare but can take place if severe memory corruption occurs.

Examples This example creates a PBDOM_DOCUMENT from a string strXML in which the abc root element contains one attribute, My_Attr. The code gets this attribute, calls GetOwnerElementObject on it to obtain the owner element, then calls GetName to return the string abc. Finally, it sets My_Attr as an attribute of the child element Data:

```
PBDOM_BUILDER      pbdombuilder_new
PBDOM_DOCUMENT     pbdom_doc
PBDOM_ATTRIBUTE    pbdom_attr
PBDOM_ELEMENT      pbdom_elem
string strXML = "<abc My_Attr=~\"My Attribute
Value~\"><data>Data</data></abc>"

TRY
    pbdombuilder_new = Create PBDOM_Builder
    pbdom_doc = pbdombuilder_new.BuildFromString (strXML)

    // Get the attribute
    pbdom_attr = pbdom_doc.GetRootElement(). &
        GetAttribute("My_Attr")

    MessageBox ("pbdom_attr Owner Element Name", &
        pbdom_attr.GetOwnerElementObject().GetName())

    pbdom_attr.Detach()

    pbdom_elem = pbdom_doc.GetRootElement(). &
        GetChildElement("data")
    pbdom_elem.SetAttribute (pbdom_attr)
```

```

        MessageBox ("pbdom_attr Owner Element Name", &
        pbdom_attr.GetOwnerElementObject().GetName())

        Destroy pbdombuilder_new
        Destroy pbdom_doc

    CATCH (PBDOM_Exception except)
        MessageBox ("Exception Occurred", except.Text)
    END TRY

```

See also SetOwnerElementObject

GetQualifiedName

Description Obtains the qualified name of a PBDOM_ATTRIBUTE. The GetQualifiedName method returns the local name for a PBDOM_ATTRIBUTE that has no namespace.

Syntax *pbdom_attribute_name*.GetQualifiedName()

Argument	Description
<i>pbdom_attribute_name</i>	The name of the PBDOM_ATTRIBUTE

Return value String.

Usage For a PBDOM_ATTRIBUTE object that has the form [*namespacePrefix*]:[*attributeName*], the qualified name for the PBDOM_ATTRIBUTE consists of the entire name, [*namespacePrefix*], and [*attributeName*].

To obtain the local name of the PBDOM_ATTRIBUTE, use the GetName method.

To obtain the namespace prefix for the PBDOM_ATTRIBUTE, use the GetNamespacePrefix method.

See also GetName
 GetNamespacePrefix
 GetNamespaceUri
 SetName
 SetNamespace

GetRealValue

Description	Returns the value of a PBDOM_ATTRIBUTE object as type real.				
Syntax	<i>pbdom_attribute_name</i> .GetRealValue() <table><tr><th>Argument</th><th>Description</th></tr><tr><td><i>pbdom_attribute_name</i></td><td>The name of the PBDOM_ATTRIBUTE</td></tr></table>	Argument	Description	<i>pbdom_attribute_name</i>	The name of the PBDOM_ATTRIBUTE
Argument	Description				
<i>pbdom_attribute_name</i>	The name of the PBDOM_ATTRIBUTE				
Return value	Real.				
Throws	EXCEPTION_DATA_CONVERSION – If data conversion fails.				
Usage	GetRealValue is the exact counterpart of the JDOM getFloatValue method.				
See also	SetRealValue				

GetText

Description	Returns the text value of the PBDOM_ATTRIBUTE object.				
Syntax	<i>pbdom_attribute_name</i> .GetText() <table><tr><th>Argument</th><th>Description</th></tr><tr><td><i>pbdom_attribute_name</i></td><td>The name of the PBDOM_ATTRIBUTE</td></tr></table>	Argument	Description	<i>pbdom_attribute_name</i>	The name of the PBDOM_ATTRIBUTE
Argument	Description				
<i>pbdom_attribute_name</i>	The name of the PBDOM_ATTRIBUTE				
Return value	String.				
Throws	EXCEPTION_USE_OF_UNNAMED_PBDOM_OBJECT – If this PBDOM_ATTRIBUTE does not have or has not been assigned a user-defined name.				
Examples	Example 1 The GetText method is invoked for the attribute in the following element:				

```
<abc ATTRIBUTE_1="My Attribute">
```

The GetText method returns the following string:

```
My Attribute
```

Example 2 This example sets an attribute called my_attr for the root element with text value text part. A PBDOM_ENTITYREFERENCE with the name ent_ref and a PBDOM_TEXT with the text value text part again are then added as part of the contents of my_attr. A call to GetText on my_attr returns the following text:

```
"text part &ent_ref; text part again."
```


The entity reference `&ent_ref;` is not expanded. If an entity reference is included in an input XML document that is parsed, then the entity reference is expanded before the XML document is transformed into a DOM tree in memory.

```
PBDOM_DOCUMENT          pbdom_doc
PBDOM_ATTRIBUTE          pbdom_attr
PBDOM_ENTITYREFERENCE    pbdom_entref
PBDOM_TEXT               pbdom_txt

try
    pbdom_doc = Create PBDOM_DOCUMENT
    pbdom_entref = Create PBDOM_ENTITYREFERENCE
    pbdom_txt = Create PBDOM_TEXT

    // Create a new document object.
    pbdom_doc.NewDocument ("root")

    // Set the text of "pbdom_txt".
    pbdom_txt.SetText (" text part again.")

    // Add an attribute "my_attr" to the root element.
    pbdom_doc.GetRootElement().SetAttribute("my_attr", &
        "text part ")

    // Set the name of the PBDOM_ENTITYREFERENCE.
    pbdom_entref.SetName ("ent_ref")

    // Append the entity reference to the root
    // element's "my_attr" attribute.
    pbdom_doc.GetRootElement(). &
        GetAttribute("my_attr").AddContent (pbdom_entref)

    // Append a new text node to the "my_attr" attribute.
    pbdom_doc.GetRootElement() . &
        GetAttribute("my_attr").AddContent (pbdom_txt)

    // Now test the text contents of "my_attr "
    if pbdom_doc.GetRootElement(). &
        GetAttribute("my_attr").GetText() = &
            "text part &ent_ref; text part again." then
        MessageBox ("Pass", &
            "GetText() on my_attr is correct.")
    else
        MessageBox ("Fail", &
            "GetText() on my_attr is incorrect.")
```

```
        end if

        catch (pbdom_exception pbdom_e)
            MessageBox ("PBDOM_EXCEPTION", pbdom_e.GetMessage())
        end try
```

- Usage
- This method returns the actual textual value of this PBDOM_ATTRIBUTE, including all text within the quotation marks. If there are any PBDOM_ENTITYREFERENCE objects included within the PBDOM_ATTRIBUTE, the PBDOM_ENTITYREFERENCE object's name is returned together with the leading ampersand ('&') character plus the terminating semicolon character(';').
- See also
- GetTextNormalize
GetTextTrim
SetText

GetTextNormalize

- Description
- Returns the text data contained within a PBDOM_ATTRIBUTE object with surrounding whitespace characters removed and internal whitespace characters replaced by a single space.

Syntax *pbdom_attribute_name*.GetTextNormalize()

Argument	Description
<i>pbdom_attribute_name</i>	The name of the PBDOM_ATTRIBUTE

Return value String.

Examples **Example 1** The GetTextNormalize method is invoked for the PBDOM_ATTRIBUTE of the following element:

```
<abc ATTRIBUTE_1=" My      Attribute ">
```

The GetTextNormalize method returns the following string:

```
My Attribute
```

Example 2 This example creates a PBDOM_DOCUMENT based on the following DOM tree, which has a Tab character between the words “My” and “Attribute” in the My_Attr attribute, specified by the 	 entity reference. There are also several space characters:

```
<abc My_Attr="My&#9;Attribute      Value ">
  <data>Data</data>
</abc>
```

The call to `GetAttribute` stores `My_Attr` in `pbdom_attr`. Calling `GetText` on `pbdom_attr` returns the entire string content of `My_Attr`, including the beginning Tab character. Calling `GetTextNormalize` returns the string with all surrounding whitespace characters removed, and the whitespace characters between the words, including the Tab character, replaced by a single space.

```
PBDOM_BUILDER      pbdombuilder_new
PBDOM_DOCUMENT     pbdom_doc
PBDOM_ATTRIBUTE     pbdom_attr
string strXML = "<abc  My_Attr=~\"My&#9;Attribute
Value    ~\"><data>Data</data></abc>"

TRY
    pbdombuilder_new = Create PBDOM_Builder
    pbdom_doc = pbdombuilder_new.BuildFromString (strXML)

    pbdom_attr = pbdom_doc.GetRootElement(). &
        GetAttribute("My_Attr")

    MessageBox ("pbdom_attr text", "[" &
        "+" pbdom_attr.GetText() + "]")
    MessageBox ("pbdom_attr text normalize", "[" &
        "+" pbdom_attr.GetTextNormalize() + "]")

    Destroy pbdombuilder_new
    Destroy pbdom_doc

    CATCH (PBDOM_Exception except)
        MessageBox ("Exception Occurred", except.Text)
END TRY
```

Usage

Surrounding whitespace characters are removed from the returned text data, and internal whitespace characters are normalized to a single space. The `GetTextNormalize` method returns an empty string if no text value exists for the `PBDOM_ATTRIBUTE` or if the text value contains only whitespace characters.

If this `PBDOM_ATTRIBUTE` contains any `PBDOM_ENTITYREFERENCE` objects, the name of the `PBDOM_ENTITYREFERENCE` object is returned as part of the normalized string.

JDOM does not provide a `getTextNormalize` method for its `Attribute` class.

See also

`GetText`
`GetTextTrim`
`SetText`

GetTextTrim

Description Returns the text data contained within a PBDOM_ATTRIBUTE object with surrounding spaces removed.

Syntax `pbdom_attribute_name.GetTextTrim()`

Argument	Description
<code>pbdom_attribute_name</code>	The name of the PBDOM_ATTRIBUTE

Return value String.

Examples **Example 1** The `GetTextTrim` method is invoked for the PBDOM_ATTRIBUTE of the following element:

```
<abc ATTRIBUTE_1=" My Attribute ">
```

The `GetTextNormalize` method returns the following string:

```
My Attribute
```

Note that the whitespace characters surrounding the string are removed, but the whitespace characters within the string remain.

Example 2 This example builds a PBDOM_DOCUMENT based on the following XML tree:

```
<abc My_Attr="&#32;&#32;&#32;My&#9;Attribute
Value&#32;&#32;&#32;">
  <data>Data</data>
</abc>
```

The `My_Attr` attribute contains an entity reference for a Tab character (`	`) and several entity references for the space character (` `). The message boxes in the following code show that `GetText` returns the complete text string of the attribute, whereas `GetTextTrim` returns the string with the surrounding whitespace characters removed. The Tab character between the words is not removed:

```
PBDOM_BUILDER pbdombuilder_new
PBDOM_DOCUMENT pbdom_doc
PBDOM_ATTRIBUTE pbdom_attr
string strXML

TRY
  strXML = "<abc
My_Attr=~"&#32;&#32;&#32;My&#9;Attribute
Value&#32;&#32;&#32;~"><data>Data</data></abc>"
  pbdombuilder_new = Create PBDOM_Builder
  pbdom_doc = pbdombuilder_new.BuildFromString (strXML)
```

```

pbdom_attr = pbdom_doc.GetRootElement(). &
    GetAttribute("My_Attr")

MessageBox ("pbdom_attr text", "[" &
    + "pbdom_attr.GetText() + "]")
MessageBox ("pbdom_attr text normalize", &
    "[" + pbdom_attr.GetTextTrim() + "]")

Destroy pbdombuilder_new
Destroy pbdom_doc

CATCH (PBDOM_Exception except)
    MessageBox ("Exception Occurred", except.Text)
END TRY

```

Usage

Surrounding whitespace characters are removed from the returned text data. The `GetTextTrim` method returns an empty string if no text value exists for the `PBDOM_ATTRIBUTE` or if the text value contains only whitespace characters.

If this `PBDOM_ATTRIBUTE` contains any `PBDOM_ENTITYREFERENCE` objects, the name of the `PBDOM_ENTITYREFERENCE` object is returned as part of the trimmed string.

See also

[GetText](#)
[GetTextNormalize](#)
[SetText](#)

GetTimeValue

Description

Returns the value of a `PBDOM_ATTRIBUTE` object as type `Time`.

Syntax

pbdom_attribute_name.GetTimeValue(string *strTimeFormat*)

Argument	Description
<i>pbdom_attribute_name</i>	The name of the <code>PBDOM_ATTRIBUTE</code>
<i>strTimeFormat</i>	The time format for the return value, for example, HH:MM:SS

The value of the *strTimeFormat* parameter can use slashes or colons as delimiters. The following table illustrates characters that have special meaning in *strTimeFormat*.

Character	Meaning	Example
H	Hour number with no leading zero	5
HH	Hour number with leading zero, if applicable	05
M	Minutes number with no leading zero	5
MM	Minutes number with leading zero, if applicable	05
S	Seconds number with no leading zero	5
SS	Seconds number with leading zero, if applicable	55

Return value Time.

Throws EXCEPTION_DATA_CONVERSION – If data conversion fails.

See also SetTimeValue

GetUIntValue

Description Returns the value of a PBDOM_ATTRIBUTE object as type UInt.

Syntax *pbdom_attribute_name*.GetUIntValue()

Argument	Description
<i>pbdom_attribute_name</i>	The name of the PBDOM_ATTRIBUTE

Return value UInt.

Throws EXCEPTION_DATA_CONVERSION – If data conversion fails.

See also SetUIntValue

GetUlongValue

Description Returns the value of a PBDOM_ATTRIBUTE object as type Ulong.

Syntax *pbdom_attribute_name*.GetUlongValue()

Argument	Description
<i>pbdom_attribute_name</i>	The name of the PBDOM_ATTRIBUTE

Return value Ulong.

Throws EXCEPTION_DATA_CONVERSION – If data conversion fails.

See also SetUlongValue

HasChildren

Description	Determines whether this PBDOM_ATTRIBUTE object contains any child PBDOM_OBJECTs.				
Syntax	<i>pbdom_attribute_name</i> .HasChildren() <table border="1"> <thead> <tr> <th>Argument</th><th>Description</th></tr> </thead> <tbody> <tr> <td><i>pbdom_attribute_name</i></td><td>The name of the PBDOM_ATTRIBUTE</td></tr> </tbody> </table>	Argument	Description	<i>pbdom_attribute_name</i>	The name of the PBDOM_ATTRIBUTE
Argument	Description				
<i>pbdom_attribute_name</i>	The name of the PBDOM_ATTRIBUTE				
Return value	Boolean. Returns true if this PBDOM_ATTRIBUTE contains child objects and false otherwise.				
Throws	EXCEPTION_PBDOM_OBJECT_INVALID_FOR_USE – This PBDOM_OBJECT object is not associated with a derived PBDOM_OBJECT class object.				
Examples	This example creates a PBDOM_DOCUMENT from a string. The XML document in the string already contains a root element named root that contains an attribute attr that contains an empty string. It then represents attr as a PBDOM_ATTRIBUTE object and calls its HasChildren method, which returns true because a PBDOM_ATTRIBUTE always contains at least one child object. After a call to GetContent, the message box shows that attr contains only one child, a PBDOM_TEXT that represents the empty string:				

```

PBDOM_BUILDER pbdom_buildr
PBDOM_DOCUMENT pbdom_doc
PBDOM_ATTRIBUTE pbdom_attr
string strXML = "<root attr=~\"~\"></root>"

try
    pbdom_buildr = Create PBDOM_BUILDER
    pbdom_doc = pbdom_buildr.BuildFromString(strXML)

    pbdom_attr = pbdom_doc.GetRootElement(). &
        GetAttribute("attr")

    if (pbdom_attr.HasChildren()) then
        PBDOM_OBJECT pbdom_obj_array[]
        long l = 0

        pbdom_attr.GetContent(pbdom_obj_array)

        for l = 1 to UpperBound(pbdom_obj_array)
            MessageBox ("Attr Child Object", &
                pbdom_obj_array[l].GetObjectClassString())
        next

```

```
        end if

        catch (pbdom_exception pbdom_e)
            MessageBox ("PBDOM_EXCEPTION", pbdom_e.GetMessage())
        end try
```

Usage This method checks to see if this PBDOM_ATTRIBUTE object contains any child PBDOM_OBJECTs and returns true if it does. Note that according to the W3C DOM specification, a DOM Attribute Node can contain only Text and Entity Reference Nodes, therefore a PBDOM_ATTRIBUTE object can contain only PBDOM_TEXT and PBDOM_ENTITYREFERENCE objects.

Even if a PBDOM_ATTRIBUTE object's text value is an empty string, it always contains at least one PBDOM_TEXT object that represents the empty string.

InsertContent

Description Inserts a PBDOM_OBJECT as a child of the PBDOM_ATTRIBUTE at a position specified by a referenced PBDOM_OBJECT.

Syntax *pbdom_attribute_name*.InsertContent(*pbdom_object pbdom_object_new*, *pbdom_object pbdom_object_ref*)

Argument	Description
<i>pbdom_attribute_name</i>	The name of the PBDOM_ATTRIBUTE
<i>pbdom_object_new</i>	The PBDOM_OBJECT to be inserted
<i>pbdom_object_ref</i>	A positional reference to a PBDOM_OBJECT before which <i>pbdom_object_new</i> is to be inserted

Return value PBDOM_OBJECT. The PBDOM_ATTRIBUTE returned as a PBDOM_OBJECT.

Throws EXCEPTION_USE_OF_UNNAMED_PBDOM_OBJECT – The PBDOM_OBJECT to be inserted is nameable and has not been given a user-defined name.

EXCEPTION_PBDOM_OBJECT_ALREADY_HAS_PARENT – The PBDOM_OBJECT to be inserted already has a parent.

EXCEPTION_INAPPROPRIATE_USE_OF_PBDOM_OBJECT – The PBDOM_OBJECT to be inserted is not valid to be inserted as a child of this PBDOM_ATTRIBUTE.

EXCEPTION_WRONG_PARENT_ERROR – The reference PBDOM_OBJECT is not a child of this PBDOM_ATTRIBUTE.

Examples

This example adds an attribute to the root element with the name `my_attr` and text content “attribute text”. It then creates a `PBDOM_ENTITYREFERENCE` object named `ent_ref` and inserts it before the attribute’s current content. Testing the new content of the attribute should return “&ent_ref;attribute text”;

Consider the following code :

```
PBDOM_DOCUMENT          pbdom_doc
PBDOM_ATTRIBUTE          pbdom_attr
PBDOM_ENTITYREFERENCE    pbdom_entref
PBDOM_OBJECT             pbdom_obj_array[]

try
    pbdom_doc = Create PBDOM_DOCUMENT
    pbdom_entref = Create PBDOM_ENTITYREFERENCE

    // Create a new document object.
    pbdom_doc.NewDocument ("root")
    // Add an attribute "my_attr" to the root element.
    pbdom_doc.GetRootElement().SetAttribute("my_attr", &
        "attribute text")
    // Set the name of the PBDOM_ENTITYREFERENCE.
    pbdom_entref.SetName ("ent_ref")

    // Get the existing contents of my_attr
    pbdom_doc.GetRootElement().GetAttribute("my_attr").&
        GetContent(pbdom_obj_array)

    // Insert the entity reference to the root element's
    // my_attr attribute before the attribute text.
    pbdom_doc.GetRootElement().GetAttribute("my_attr").&
        InsertContent(pbdom_entref, pbdom_obj_array[1])

    // Test the text contents of "my_attr"
    if pbdom_doc.GetRootElement(). &
        GetAttribute("my_attr").GetText() = &
        "&ent_ref;attribute text" then
        MessageBox ("Pass", &
            "GetText() on my_attr is correct.")
    else
        MessageBox ("Fail", &
            "GetText() on my_attr is incorrect.")
    end if
```

```
catch (pbdom_exception pbdom_except)
    MessageBox ("PBDOM_EXCEPTION", &
        pbdom_except.GetMessage() )
end try
```

Usage This method inserts the input PBDOM_OBJECT as a child at a specific position (before the reference PBDOM_OBJECT). Currently, only a PBDOM_TEXT and a PBDOM_ENTITYREFERENCE object can be inserted as a child of a PBDOM_ATTRIBUTE.

If the reference PBDOM_OBJECT is null, the PBDOM_OBJECT to be inserted is inserted at the end of this PBDOM_ATTRIBUTE object's list of children.

See also AddContent
GetContent
RemoveContent
SetContent

IsAncestorObjectOf

Description Determines whether the current PBDOM_ATTRIBUTE object is the ancestor of another PBDOM_OBJECT.

Syntax *pbdom_attribute_name*.IsAncestorObjectOf(*pbdom_object*
pbdom_object_ref)

Argument	Description
<i>pbdom_document_name</i>	The name of a PBDOM_ATTRIBUTE object
<i>pbdom_object_ref</i>	A reference to a PBDOM_OBJECT to check against

Return value Boolean. Returns true if this PBDOM_ATTRIBUTE is the ancestor of the input PBDOM_PBOBJECT and false otherwise.

Throws EXCEPTION_INVALID_ARGUMENT– The input PBDOM_OBJECT is invalid. This can happen if it has not been initialized properly or is a null object reference.

Usage This method checks to see whether the current PBDOM_ATTRIBUTE is the ancestor object of the input PBDOM_OBJECT. According to the W3C DOM specification, only a PBDOM_TEXT and a PBDOM_ENTITYREFERENCE object can become a child object of a PBDOM_ATTRIBUTE, and therefore a PBDOM_ATTRIBUTE can only be an ancestor of a PBDOM_TEXT or a PBDOM_ENTITYREFERENCE object.

RemoveContent

Description	Removes the input PBDOM_OBJECT from the PBDOM_ATTRIBUTE.						
Syntax	<i>pbdom_attribute_name</i> .RemoveContent(<i>pbdom_object pbdom_object_ref</i>)						
	<table> <tr> <th>Argument</th><th>Description</th></tr> <tr> <td><i>pbdom_attribute_name</i></td><td>The name of the PBDOM_ATTRIBUTE</td></tr> <tr> <td><i>pbdom_object_ref</i></td><td>The PBDOM_OBJECT child to be removed from this PBDOM_ATTRIBUTE</td></tr> </table>	Argument	Description	<i>pbdom_attribute_name</i>	The name of the PBDOM_ATTRIBUTE	<i>pbdom_object_ref</i>	The PBDOM_OBJECT child to be removed from this PBDOM_ATTRIBUTE
Argument	Description						
<i>pbdom_attribute_name</i>	The name of the PBDOM_ATTRIBUTE						
<i>pbdom_object_ref</i>	The PBDOM_OBJECT child to be removed from this PBDOM_ATTRIBUTE						
Return value	Boolean. Returns true if the content has been successfully removed and false otherwise.						
Throws	<p>EXCEPTION_INVALID_ARGUMENT – The input PBDOM_OBJECT is invalid. This can happen if it has not been initialized properly or is a null object reference.</p> <p>EXCEPTION_PBDOM_OBJECT_INVALID_FOR_USE – This PBDOM_ATTRIBUTE object or the input PBDOM_OBJECT is not associated with a derived PBDOM_OBJECT class object.</p> <p>EXCEPTION_USE_OF_UNNAMED_PBDOM_OBJECT – This PBDOM_ATTRIBUTE or the PBDOM_OBJECT to be removed is nameable and has not been given a user-defined name.</p> <p>EXCEPTION_WRONG_DOCUMENT_ERROR – The input PBDOM_OBJECT is not contained within the same PBDOM_DOCUMENT as this PBDOM_ATTRIBUTE.</p> <p>EXCEPTION_WRONG_PARENT_ERROR – The input PBDOM_OBJECT is not a child of the current PBDOM_ATTRIBUTE.</p>						
Examples	<p>This example adds an attribute to the root element with the name <i>my_attr</i> and text content “attribute text”. It then creates a PBDOM_ENTITYREFERENCE object named <i>ent_ref</i> and inserts it before the attribute’s current content.</p> <p>At this point, <i>my_attr</i> contains two child PBDOM_OBJECTs: a PBDOM_TEXT containing “attribute text” and a PBDOM_ENTITYREFERENCE named <i>ent_ref</i>. The element looks like this when serialized:</p> <pre><root my_attr="attribute text&ent_ref;"></pre> <p>A call to GetContent returns an array containing these two PBDOM_OBJECTs. <i>pbdom_obj_array[1]</i> should point to the PBDOM_TEXT. After <i>pbdom_obj_array[1]</i> is removed from <i>my_attr</i>, the element looks like this when serialized: <i><root my_attr="&ent_ref;"></i>.</p>						

```
PBDOM_DOCUMENT      pbdom_doc
PBDOM_ATTRIBUTE      pbdom_attr
PBDOM_ENTITYREFERENCE pbdom_entref
PBDOM_OBJECT          pbdom_obj_array[]

try
    pbdom_doc = Create PBDOM_DOCUMENT
    pbdom_entref = Create PBDOM_ENTITYREFERENCE

    // Create a new document object.
    pbdom_doc.NewDocument ("root")
    // Add an attribute "my_attr" to the root element.
    pbdom_doc.GetRootElement().SetAttribute("my_attr", &
        "attribute text")

    // Set the name of our PBDOM_ENTITYREFERENCE.
    pbdom_entref.SetName ("ent_ref")

    // Add the entity reference to the root
    // element's "my_attr" attribute.
    pbdom_doc.GetRootElement(). &
        GetAttribute("my_attr"). AddContent(pbdom_entref)

    // Get the existing contents of "my_attr"
    pbdom_doc.GetRootElement().GetAttribute("my_attr").&
        GetContent(pbdom_obj_array)

    // Remove PBDOM_TEXT object from "my_attr"
    pbdom_doc.GetRootElement().GetAttribute("my_attr").&
        RemoveContent(pbdom_obj_array[1])

    // Test the text contents of "my_attr "
    if pbdom_doc.GetRootElement(). &
        GetAttribute("my_attr").GetText() = &
            "&ent_ref;" then
        MessageBox ("Pass", &
            "GetText() on my_attr is correct.")
    else
        MessageBox ("Fail",
            "GetText() on my_attr is incorrect.")
    end if

catch (pbdom_exception pbdom_e)
    MessageBox ("PBDOM_EXCEPTION", pbdom_e.GetMessage())
end try
```

Usage	The RemoveContent method removes the input PBDOM_OBJECT from this PBDOM_ATTRIBUTE. Currently, only a PBDOM_TEXT and a PBDOM_ENTITYREFERENCE object can be part of the contents of a PBDOM_ATTRIBUTE. Therefore, the input PBDOM_OBJECT must be either a PBDOM_TEXT or a PBDOM_ENTITYREFERENCE object.
See also	AddContent GetContent InsertContent SetContent

SetBooleanValue

Description	Sets the text value of a PBDOM_ATTRIBUTE object. The SetBooleanValue method creates this text value by serializing the provided boolean value into a string.						
Syntax	<i>pbdom_attribute_name</i> .SetBooleanValue(boolean <i>boolValue</i>)						
	<table> <tr> <th>Argument</th><th>Description</th></tr> <tr> <td><i>pbdom_attribute_name</i></td><td>The name of the PBDOM_ATTRIBUTE</td></tr> <tr> <td><i>boolValue</i></td><td>A boolean value to be set for the PBDOM_ATTRIBUTE</td></tr> </table>	Argument	Description	<i>pbdom_attribute_name</i>	The name of the PBDOM_ATTRIBUTE	<i>boolValue</i>	A boolean value to be set for the PBDOM_ATTRIBUTE
Argument	Description						
<i>pbdom_attribute_name</i>	The name of the PBDOM_ATTRIBUTE						
<i>boolValue</i>	A boolean value to be set for the PBDOM_ATTRIBUTE						
Return value	PBDOM_ATTRIBUTE. The PBDOM_ATTRIBUTE from which the SetBooleanValue method was invoked.						
See also	GetBooleanValue						

SetContent

Description	Sets the content of this PBDOM_ATTRIBUTE.						
Syntax	<i>pbdom_attribute_name</i> .SetContent(pbdom_object <i>pbdom_object_array</i>)						
	<table> <tr> <th>Argument</th><th>Description</th></tr> <tr> <td><i>pbdom_attribute_name</i></td><td>The name of the PBDOM_ATTRIBUTE</td></tr> <tr> <td><i>pbdom_object_array</i></td><td>An array of PBDOM_OBJECTS</td></tr> </table>	Argument	Description	<i>pbdom_attribute_name</i>	The name of the PBDOM_ATTRIBUTE	<i>pbdom_object_array</i>	An array of PBDOM_OBJECTS
Argument	Description						
<i>pbdom_attribute_name</i>	The name of the PBDOM_ATTRIBUTE						
<i>pbdom_object_array</i>	An array of PBDOM_OBJECTS						
Return value	PBDOM_OBJECT. This PBDOM_ATTRIBUTE modified.						
Throws	EXCEPTION_ILLEGAL_PBOBJECT – One of the array items is not a valid PBDOM object. This can happen if the array item has not been initialized properly or is a null object reference. This is similar to EXCEPTION_INVALID_ARGUMENT.						

EXCEPTION_USE_OF_UNNAMED_PBDOM_OBJECT – One of the array items is nameable and has not been given a user-defined name.

EXCEPTION_PBDOM_OBJECT_INVALID_FOR_USE – One of the array items is not associated with a derived PBDOM_OBJECT.

EXCEPTION_PBDOM_OBJECT_ALREADY_HAS_PARENT – One of the array items already has a parent.

EXCEPTION_INAPPROPRIATE_USE_OF_PBDOM_OBJECT – One of the array items is not allowed to be set as part of the contents of a PBDOM_ATTRIBUTE.

Examples

This example demonstrates setting the contents of a PBDOM_ATTRIBUTE object. It creates a PBDOM_DOCUMENT with root element root and attaches to it a PBDOM_DOCTYPE with the following internal subset:

```
<!ELEMENT root ANY>
<!ATTLIST root attr CDATA #REQUIRED>
<!ENTITY ent_ref "MY ENTITY REFERENCE">
```

It also creates a PBDOM_ATTRIBUTE, attr, and sets as its contents an array of three PBDOM_OBJECTS:

- A PBDOM_TEXT with the text value “start text ”
- A PBDOM_ENTITYREFERENCE named ent_ref
- A PBDOM_TEXT with the text value “ end text.”

This removes the original contents of attr and sets new contents so that when the document is serialized into an external file, the root element looks like this:

```
<root attr="start text &ent_ref; end text."/>
```

Finally, a user-defined function called GetAttributeText parses the external serialized XML file and retrieves the text value of the attr attribute.

The code for GetAttributeText function is as follows:

```
PBDOM_BUILDER      pbdom_buildr
PBDOM_DOCUMENT     pbdom_doc
string             strReturn

try
    pbdom_buildr = Create PBDOM_BUILDER
    pbdom_doc = pbdom_buildr. &
        BuildFromFile (strXMLFileName)

    strReturn = pbdom_doc.GetRootElement(). &
        GetAttribute(strAttributeName).GetText()
```

```
catch (PBDOM_EXCEPTION pbdom_except)
    strReturn = ""
end try
return strReturn
```

This function builds a PBDOM_DOCUMENT from the external XML file (its first argument) and gets the text value of an attribute (its second argument) from the root element.

The code that sets the content of the PBDOM_ATTRIBUTE is as follows:

```
PBDOM_DOCUMENT      pbdom_doc
PBDOM_DOCTYPE        pbdom_doctype
PBDOM_ATTRIBUTE      pbdom_attr
PBDOM_TEXT           pbdom_txt
PBDOM_OBJECT         pbdom_obj_array_set[]
long l = 0

try
    pbdom_doc = Create PBDOM_DOCUMENT
    pbdom_doc.NewDocument ("root")

    pbdom_doctype = Create PBDOM_DOCTYPE
    pbdom_doctype.SetName ("root")
    pbdom_doctype.setinternalsubset("<!ELEMENT root
ANY><!ATTLIST root attr CDATA #REQUIRED><!ENTITY
ent_ref ~\"MY ENTITY REFERENCE~\">")

    pbdom_doc.SetDocType(pbdom_doctype)

    pbdom_doc.GetRootElement().SetAttribute("attr", "")

    pbdom_obj_array_set[1] = Create PBDOM_TEXT
    pbdom_txt = pbdom_obj_array_set[1]
    pbdom_txt.SetText ("start text ")

    pbdom_obj_array_set[2] = Create PBDOM_ENTITYREFERENCE
    pbdom_obj_array_set[2].SetName("ent_ref")

    pbdom_obj_array_set[3] = Create PBDOM_TEXT
    pbdom_txt = pbdom_obj_array_set[3]
    pbdom_txt.SetText (" end text.")

    pbdom_doc.GetRootElement().GetAttribute("attr"). &
        SetContent(pbdom_obj_array_set)
```

```
pbdom_doc.SaveDocument &
("c:\xmltests\attr_set_content.xml")

MessageBox ("Attribute Text", GetAttributeText &
("c:\xmltests\attr_set_content.xml", "attr"))

catch (PBDOM_EXCEPTION pbdom_e)
    MessageBox ("PBDOM_EXCEPTION", pbdom_e.GetMessage())
end try
```

Usage This method sets the content of this PBDOM_ATTRIBUTE. The supplied array should contain only objects of type PBDOM_TEXT and PBDOM_ENTITYREFERENCE.

When all objects in the supplied array are legal and before the new content is added, all objects in the old content will have their parentage set to null (no parent) and the old content list will be cleared from this PBDOM_ATTRIBUTE.

This has the effect that the items of any active array (previously obtained with a call to GetContent) also change to reflect the new condition. In addition, all objects in the supplied array have their parentage set to this PBDOM_ATTRIBUTE.

Passing a null value or an empty array clears the existing content of this PBDOM_ATTRIBUTE.

See also AddContent
GetContent
RemoveContent
SetContent

SetDateValue

Description Sets the text value of a PBDOM_ATTRIBUTE object. The SetDateValue method creates this text value by serializing the provided date value into a string.

Syntax *pbdom_attribute_name*.SetDateValue(date *dateValue*, *strDateFormat*)

Argument	Description
<i>pbdom_attribute_name</i>	The name of the PBDOM_ATTRIBUTE
<i>dateValue</i>	A date value to be set for the PBDOM_ATTRIBUTE
<i>strDateFormat</i>	The format in which the date value is to be set for the PBDOM_ATTRIBUTE, for example, MM:DD:YYYY

The value of the *strDateFormat* parameter can include slashes or colons as delimiters. The following table illustrates characters having special meaning in *strDateFormat*.

Character	Meaning	Example
D	Day number with no leading zero	5
DD	Day number with leading zero, if applicable	05
M	Month number with no leading zero	5
MM	Month number with leading zero, if applicable	05
YY	Two-digit year number	05
YYYY	Four-digit year number	2005

Return value PBDOM_ATTRIBUTE. The PBDOM_ATTRIBUTE from which the SetDateValue method was invoked.

See also GetDateValue

SetDateTimeValue

Description Sets the text value of a PBDOM_ATTRIBUTE object. The SetDateTimeValue method creates this text value by serializing the provided datetime value into a string.

Syntax *pbdom_attribute_name*.SetDateTimeValue(datetime *datetimeValue*, string *strDateFormat*, string *strTimeFormat*)

Argument	Description
<i>pbdom_attribute_name</i>	The name of the PBDOM_ATTRIBUTE
<i>datetimeValue</i>	A datetime value to be set for the PBDOM_ATTRIBUTE
<i>strDateFormat</i>	The format in which the date part of the datetime value is to be set for the PBDOM_ATTRIBUTE, for example, MM:DD:YYYY
<i>strTimeFormat</i>	The format in which the time part of the datetime value is to be set for the PBDOM_ATTRIBUTE, for example, HH:MM:SS

The value of the *strDateFormat* parameter can use slashes or colons as delimiters. The following table illustrates characters that have special meaning in *strDateFormat*.

Character	Meaning	Example
D	Day number with no leading zero	5
DD	Day number with leading zero, if applicable	05
M	Month number with no leading zero	5
MM	Month number with leading zero, if applicable	05
YY	Two-digit year number	05
YYYY	Four-digit year number	2005

The value of the *strTimeFormat* parameter can include slashes or colons as delimiters. The following table illustrates characters that have special meaning in *strTimeFormat*.

Character	Meaning	Example
H	Hour number with no leading zero	5
HH	Hour number with leading zero, if applicable	05
M	Minutes number with no leading zero	5
MM	Minutes number with leading zero, if applicable	05
S	Seconds number with no leading zero	5
SS	Seconds number with leading zero, if applicable	55

Return value	PBDOM_ATTRIBUTE. The PBDOM_ATTRIBUTE from which the SetDateTimeValue method was invoked.
--------------	--

See also [GetDateTimeValue](#)

SetDoubleValue

Description	Sets the text value of a PBDOM_ATTRIBUTE object. The SetDoubleValue method creates this text value by serializing the provided double value into a string.
-------------	--

Syntax *pbdom_attribute_name*.SetDoubleValue(double *doubleValue*)

Argument	Description
<i>pbdom_attribute_name</i>	The name of the PBDOM_ATTRIBUTE
<i>doubleValue</i>	A double value to be set for the PBDOM_ATTRIBUTE

Return value	PBDOM_ATTRIBUTE. The PBDOM_ATTRIBUTE from which the SetDoubleValue method was invoked.
--------------	--

See also [GetDoubleValue](#)

SetIntValue

Description	Sets the text value of a PBDOM_ATTRIBUTE object. The SetIntValue method creates this text value by serializing the provided int value into a string.						
Syntax	<i>pbdom_attribute_name</i> .SetIntValue(integer <i>intValue</i>)						
	<table> <tr> <th>Argument</th><th>Description</th></tr> <tr> <td><i>pbdom_attribute_name</i></td><td>The name of the PBDOM_ATTRIBUTE</td></tr> <tr> <td><i>intValue</i></td><td>An int value to be set for the PBDOM_ATTRIBUTE</td></tr> </table>	Argument	Description	<i>pbdom_attribute_name</i>	The name of the PBDOM_ATTRIBUTE	<i>intValue</i>	An int value to be set for the PBDOM_ATTRIBUTE
Argument	Description						
<i>pbdom_attribute_name</i>	The name of the PBDOM_ATTRIBUTE						
<i>intValue</i>	An int value to be set for the PBDOM_ATTRIBUTE						
Return value	PBDOM_ATTRIBUTE. The PBDOM_ATTRIBUTE from which the SetIntValue method was invoked.						
See also	GetIntValue						

SetLongValue

Description	Sets the text value of a PBDOM_ATTRIBUTE object. The SetLongValue method creates this text value by serializing the provided long value into a string.						
Syntax	<i>pbdom_attribute_name</i> .SetLongValue(long <i>longValue</i>)						
	<table> <tr> <th>Argument</th><th>Description</th></tr> <tr> <td><i>pbdom_attribute_name</i></td><td>The name of the PBDOM_ATTRIBUTE</td></tr> <tr> <td><i>longValue</i></td><td>A long value to be set for the PBDOM_ATTRIBUTE</td></tr> </table>	Argument	Description	<i>pbdom_attribute_name</i>	The name of the PBDOM_ATTRIBUTE	<i>longValue</i>	A long value to be set for the PBDOM_ATTRIBUTE
Argument	Description						
<i>pbdom_attribute_name</i>	The name of the PBDOM_ATTRIBUTE						
<i>longValue</i>	A long value to be set for the PBDOM_ATTRIBUTE						
Return value	PBDOM_ATTRIBUTE. The PBDOM_ATTRIBUTE from which the SetLongValue method was invoked.						
See also	GetLongValue						

SetName

Description	Sets the local name of the PBDOM_ATTRIBUTE object.						
Syntax	<i>pbdom_attribute_name</i> .SetName(string <i>strName</i>)						
	<table> <tr> <th>Argument</th><th>Description</th></tr> <tr> <td><i>pbdom_attribute_name</i></td><td>The name of the PBDOM_ATTRIBUTE</td></tr> <tr> <td><i>strName</i></td><td>The new local name for the PBDOM_ATTRIBUTE</td></tr> </table>	Argument	Description	<i>pbdom_attribute_name</i>	The name of the PBDOM_ATTRIBUTE	<i>strName</i>	The new local name for the PBDOM_ATTRIBUTE
Argument	Description						
<i>pbdom_attribute_name</i>	The name of the PBDOM_ATTRIBUTE						
<i>strName</i>	The new local name for the PBDOM_ATTRIBUTE						
Return value	Boolean. Returns true if the local name of the PBDOM_ATTRIBUTE has been changed and false otherwise.						

Throws **EXCEPTION_INVALID_NAME** – If the input name is not valid for a local name of a **PBDOM_ATTRIBUTE**. This happens if the name is an empty string, if the name contains a namespace prefix, or if the name is already the name of an existing attribute of the owning element.

EXCEPTION_MEMORY_ALLOCATION_FAILURE – Insufficient memory was encountered while executing this method.

Examples This example shows how to set the local name of a **PBDOM_ATTRIBUTE** and demonstrates that the namespace information it contains is not affected by a change in name.

The sample code first builds a **PBDOM_DOCUMENT** from a string that contains XML that has a single root element with a namespace declaration and an attribute **a**.

The **GetAttribute** method obtains the attribute **a**, which does not belong to a namespace, and the returned **PBDOM_ATTRIBUTE** is tested and should be valid. After a call to **SetName**, the code confirms the name change and tests that the namespace information remains the same (the namespace prefix and URI are both still empty strings):

```
PBDOM_BUILDER      pbdom_buildr
PBDOM_DOCUMENT     pbdom_doc
PBDOM_ATTRIBUTE    pbdom_attr
string strXML = "<root xmlns:n1=~\"http://www.n.com~\"
a=~\"123~\"/>"

try
    pbdom_buildr = Create PBDOM_BUILDER
    pbdom_doc = pbdom_buildr.BuildFromString (strXML)

    pbdom_attr = pbdom_doc.GetRootElement(). &
        GetAttribute("a")

    if (IsValid(pbdom_attr)) then
        MessageBox ("Pass", &
            "PBDOM_ATTRIBUTE a is retrieved via the " &
            + "NONAMESPACE GetAttribute() method.")
    else
        MessageBox ("Fail", &
            "PBDOM_ATTRIBUTE should have been retrievable.")
    end if

    pbdom_attr.SetName ("b")

    if pbdom_attr.GetName() = "b" then
```

```
        MessageBox ("Pass", "Name has been changed to b.")
    else
        MessageBox ("Fail", &
            "Name should have been changed to b.")
    end if

    if pbdom_attr.GetNamespacePrefix() = "" then
        MessageBox ("Pass", &
            "Namespace Prefix is an empty string.")
    else
        MessageBox ("Fail", "Namespace Prefix is : " &
            + pbdom_attr.GetNamespacePrefix() &
            + " which is incorrect.")
    end if

    if pbdom_attr.GetNamespaceURI() = "" then
        MessageBox ("Pass", &
            "Namespace URI is an empty string.")
    else
        MessageBox ("Fail", "Namespace URI is : " &
            + pbdom_attr.GetNamespaceURI() &
            + " which is incorrect.")
    end if

    catch(PBDOM_EXCEPTION pbdom_e)
        MessageBox("PBDOM_EXCEPTION", pbdom_e.GetMessage())
    end try
```

Usage

This method sets the local name of the PBDOM_ATTRIBUTE. When a PBDOM_ATTRIBUTE is first created, it has no name and the namespace information is by default set to the NONNAMESPACE namespace. (Its NS Prefix and URI are both empty strings.)

The SetName method is used to set the local name of the PBDOM_ATTRIBUTE. The SetNamespace method is used to set the Namespace Prefix and URI of the PBDOM_ATTRIBUTE.

If a PBDOM_ATTRIBUTE is retrieved programmatically from a parsed document, then the name and namespace information of the PBDOM_ATTRIBUTE are inherited from the referred attribute of the parsed document. The name and namespace information of the PBDOM_ATTRIBUTE, however, can still be modified using the SetName and SetNamespace methods.

Note that according to the W3C “Namespaces in XML” specification, when the SetName method is invoked on a PBDOM_ATTRIBUTE, if the PBDOM_ATTRIBUTE (PBDOM_ATTRIBUTE 1) has an owner PBDOM_ELEMENT that contains an existing PBDOM_ATTRIBUTE (PBDOM_ATTRIBUTE 2) with the same name (to be set for PBDOM_ATTRIBUTE 1) and namespace URI as PBDOM_ATTRIBUTE 1, the EXCEPTION_INVALID_NAME exception will be thrown.

See also GetName
 SetOwnerElementObject

SetNamespace

Description Sets the namespace for a PBDOM_ATTRIBUTE object based on the specified namespace prefix and URI.

Syntax *pbdom_attribute_name*.SetNamespace(string*strNamespacePrefix*, string *strNamespaceUri*, boolean *bVerifyNamespace*)

Argument	Description
<i>pbdom_attribute_name</i>	The name of the PBDOM_ATTRIBUTE
<i>strNamespacePrefix</i>	A string containing the namespace prefix to be set for the PBDOM_ATTRIBUTE
<i>strNamespaceUri</i>	A string containing the namespace URI to be set for the PBDOM_ATTRIBUTE
<i>bVerifyNamespace</i>	A boolean value to indicate whether to search for an in-scope namespace declaration that matches the input namespace prefix and URI

Return value Long. Returns 0 if namespace information was set successfully and -1 if no in-scope namespace matching the input prefix and URI exists.

Throws EXCEPTION_INVALID_NAME – If the input namespace prefix or the URI or the combination of prefix and URI is not valid. This occurs if:

- The namespace prefix is an empty string and the URI is not an empty string. If both are empty strings, the NONAMESPACE namespace is being specified and this prefix/URI combination is correct.
- The namespace Prefix is `xmlns` and the URI is not `http://www.w3.org/2000/xmlns/`. This namespace prefix/URI pair is unique and exclusive. Its elements cannot be used individually and separately. The use of this pair signifies a namespace declaration.

- The namespace prefix string is invalid. That is, it does not conform to the W3C “Namespaces in XML” specifications for the name of a prefix.
- The namespace URI string is invalid. That is, it does not conform to the W3C specifications for a URI string.
- The owner Element of this PBDOM_ATTRIBUTE already contains an attribute that has the same name as the current PBDOM_ATTRIBUTE and belongs to the namespace that is to be set for the current PBDOM_ATTRIBUTE.

EXCEPTION_INVALID_ARGUMENT – If the input namespace prefix string or the URI string has been set to null.

EXCEPTION_MEMORY_ALLOCATION_FAILURE – If there is insufficient memory to allocate for internal strings.

EXCEPTION_INTERNAL_XML_ENGINE_ERROR – If some internal error occurred in the XML engine.

Examples

This example demonstrates how to set the namespace prefix and URI for a PBDOM_ATTRIBUTE. It creates a PBDOM_DOCUMENT based on the following XML document:

```
<root xmlns:pre1="http://www.pre.com">
  <child1 pre1:a="123" b="456"/>
</root>
```

The namespace *http://www.pre.com*, which has the prefix *pre1*, is defined in the root element. The child element *child1* has an attribute *a* that belongs to the declared namespace and an attribute *b* that does not belong to a namespace.

The example uses *GetAttribute* to get and store the attribute *b* in *pbdom_attr*, then calls *SetNamespace* on *pbdom_attr*, specifying the strings “*pre1*” and “*http://www.pre.com*” as the prefix and URI, and setting the *bVerifyNamespace* parameter to *true*. This tells *SetNamespace* to check first to see if the owner element of *b* or the owner element's ancestor elements contain a namespace declaration for the *pre1/http://www.pre.com* namespace prefix/URI pair.

The search for this prefix/URI pair succeeds because the root element contains such a namespace declaration.

```
PBDOM_BUILDER    pbdom_builder
PBDOM_DOCUMENT   pbdom_doc
PBDOM_ATTRIBUTE  pbdom_attr
string strXML = "<root
xmlns:pre1=~\"http://www.pre.com~\"><child1
pre1:a=~\"123~\" b=~\"456~\"/></root>"
```

```
try
    pbdom_buildr = Create PBDOM_BUILDER
    pbdom_doc = pbdom_buildr.BuildFromString (strXML)

    pbdom_attr =
    pbdom_doc.GetRootElement().GetChildElement("child1").GetAttribute("b", "", "")

    pbdom_attr.SetNamespace("pre1",
    "http://www.pre.com", true)

    MessageBox ("NS Prefix",
    pbdom_attr.GetNamespacePrefix())
    MessageBox ("NS URI", pbdom_attr.GetNamespaceURI())
    MessageBox ("Name", pbdom_attr.getName())
    MessageBox ("Text", pbdom_attr.getText())

    pbdom_doc.SaveDocument ("ns.xml")

catch (PBDOM_EXCEPTION pbdom_except)
    MessageBox ("PBDOM_EXCEPTION",
    pbdom_except.GetMessage())
end try
```

There is no other attribute inside child1 that has the name b and that also belongs to the *http://www.pre.com namespace*, so the SetNamespace method succeeds. When serialized, the PBDOM_DOCUMENT looks like this:

```
<root xmlns:pre1="http://www.pre.com">
    <child1 pre1:b="456" pre1:a="123" />
</root>
```

Usage

This method sets this PBDOM_ATTRIBUTE object's namespace based on the input prefix and URI. The input prefix can be an empty string, but the input URI cannot be an empty string unless the prefix is also an empty string.

If the input prefix and URI are both empty strings, the PBDOM_ATTRIBUTE has no namespace. The *bVerifyNamespace* parameter tells the method whether to search for an in-scope namespace declaration that matches the input namespace prefix and URI.

As required by the W3C specification on “Namespaces in XML,” if the current PBDOM_ATTRIBUTE has an owner PBDOM_ELEMENT that contains an existing PBDOM_ATTRIBUTE that has the same name as the current PBDOM_ATTRIBUTE and the same namespace URI as is to be set for the current PBDOM_ATTRIBUTE, the EXCEPTION_INVALID_NAME exception is thrown.

See also

GetName
GetNamespacePrefix
GetNamespaceUri
GetQualifiedName
SetName

SetOwnerElementObject

Description Sets the input PBDOM_ELEMENT as the owner of the current PBDOM_ATTRIBUTE.

Syntax *pbdom_attribute_name*.SetOwnerElementObject(*pbdom_element pbdom_element_ref*)

Argument	Description
<i>pbdom_attribute_name</i>	The name of the PBDOM_ATTRIBUTE
<i>pbdom_element_ref</i>	The PBDOM_ELEMENT to be set as the owner of this current PBDOM_ATTRIBUTE

Return value PBDOM_ATTRIBUTE. This PBDOM_ATTRIBUTE itself modified and returned.

Throws EXCEPTION_INVALID_ARGUMENT – The input PBDOM_ELEMENT is invalid. This can happen if it has not been initialized properly or is a null object reference.

EXCEPTION_PBDOM_OBJECT_INVALID_FOR_USE – The internal implementation of the PBDOM_ATTRIBUTE object or the input PBDOM_ELEMENT object is null. The occurrence of this exception is rare but can take place if severe memory corruption occurs.

EXCEPTION_PBDOM_OBJECT_ALREADY_HAS_OWNER – This PBDOM_ATTRIBUTE already has an owner Element.

EXCEPTION_USE_OF_UNNAMED_PBDOM_OBJECT – The input PBDOM_ELEMENT has not been named.

EXCEPTION_INVALID_NAME – The input PBDOM_ELEMENT already contains an attribute that has the same name and that belongs to the same namespace as this current PBDOM_ATTRIBUTE.

Examples

This example moves the positions of two PBDOM_ATTRIBUTE objects from one element to another.

In the string strXML from which a PBDOM_DOCUMENT is created, the abc root element contains a namespace declaration and two attributes. My_Attr belongs to no namespace, and pre:My_Attr_NS belongs to the http://www.pre.com namespace.

The example obtains handles for the two attributes and the data element, then detaches both attributes from abc and sets data as their new owner:

```
PBDOM_BUILDER      pbdombuilder_new
PBDOM_DOCUMENT     pbdom_doc
PBDOM_ATTRIBUTE    pbdom_attr
PBDOM_ATTRIBUTE    pbdom_attr_ns
PBDOM_ELEMENT      pbdom_elem_data
string strXML = "<abc My_Attr=~\"Attribute Value~\"
pre:My_Attr_NS=~\"Attribute Value NS~\"
xmlns:pre=~\"http://www.pre.com~\"><data>Data</data></ab
c>"
```

TRY

```
pbdombuilder_new = Create PBDOM_Builder
pbdom_doc = pbdombuilder_new.BuildFromString(strXML)

pbdom_attr = pbdom_doc.GetRootElement(). &
    GetAttribute("My_Attr")
pbdom_attr_ns = pbdom_doc.GetRootElement(). &
    GetAttribute("My_Attr_NS", "pre", &
    "http://www.pre.com")
pbdom_elem_data = pbdom_doc.GetRootElement(). &
    GetChildElement("data")

pbdom_attr.Detach()
pbdom_attr.SetOwnerElementObject (pbdom_elem_data)

pbdom_attr_ns.Detach()
pbdom_attr_ns.SetOwnerElementObject (pbdom_elem_data)

pbdom_doc.SaveDocument("setownerelementobject.xml")

Destroy pbdombuilder_new
Destroy pbdom_doc
```

```

CATCH (PBDOM_Exception except)

    MessageBox ("Exception Occurred", except.Text)

END TRY

```

When the document is serialized, the XML looks like this:

```

<abc xmlns:pre="http://www.pre.com">

    <data pre:My_Attr_NS="Attribute Value NS"
    My_Attr="Attribute Value">Data</data>

</abc>

```

Usage According to the “Namespace in XML” specifications, an element cannot contain two attributes with the same local name and namespace URI. This is true even if the prefixes of the two attributes are different. An exception is thrown if this rule is violated when `SetOwnerElementObject` is invoked.

See also `GetOwnerElementObject`

SetRealValue

Description Sets the text value of a `PBDOM_ATTRIBUTE` object. The `SetRealValue` method creates this text value by serializing the provided real value into a string.

Syntax `pbdom_attribute_name.SetRealValue(real realValue)`

Argument	Description
<i>pbdom_attribute_name</i>	The name of the <code>PBDOM_ATTRIBUTE</code>
<i>realValue</i>	A real value to be set for the <code>PBDOM_ATTRIBUTE</code>

Return value `PBDOM_ATTRIBUTE`. The `PBDOM_ATTRIBUTE` from which the `SetRealValue` method was invoked.

See also `GetRealValue`

SetText

Description	Sets the string value of a PBDOM_ATTRIBUTE object.						
Syntax	<div><i>pbdom_attribute_name</i>.SetText(string <i>strText</i>)</div> <table><tr><th>Argument</th><th>Description</th></tr><tr><td><i>pbdom_attribute_name</i></td><td>The name of the PBDOM_ATTRIBUTE</td></tr><tr><td><i>strText</i></td><td>The string value to be set in the PBDOM_ATTRIBUTE</td></tr></table>	Argument	Description	<i>pbdom_attribute_name</i>	The name of the PBDOM_ATTRIBUTE	<i>strText</i>	The string value to be set in the PBDOM_ATTRIBUTE
Argument	Description						
<i>pbdom_attribute_name</i>	The name of the PBDOM_ATTRIBUTE						
<i>strText</i>	The string value to be set in the PBDOM_ATTRIBUTE						
Return value	PBDOM_ATTRIBUTE.						
Usage	<p>This method returns the current PBDOM_ATTRIBUTE with the input string value set.</p> <p>This method is the counterpart of the JDOM setValue method.</p>						
See also	GetText GetTextNormalize GetTextTrim						

SetTimeValue

Description	Sets the text value of a PBDOM_ATTRIBUTE object. The SetTimeValue method creates this text value by serializing the provided time value into a string.								
Syntax	<div><i>pbdom_attribute_name</i>.SetTimeValue(time <i>timeValue</i>, string <i>strTimeFormat</i>)</div> <table><tr><th>Argument</th><th>Description</th></tr><tr><td><i>pbdom_attribute_name</i></td><td>The name of the PBDOM_ATTRIBUTE</td></tr><tr><td><i>timeValue</i></td><td>A time value to be set for the PBDOM_ATTRIBUTE</td></tr><tr><td><i>strTimeFormat</i></td><td>The format in which the time value is to be set for the PBDOM_ATTRIBUTE, for example, HH:MM:SS</td></tr></table> <p>The value of the <i>strTimeFormat</i> parameter can use slashes or colons as delimiters. The following table illustrates characters that have special meaning in <i>strTimeFormat</i>.</p>	Argument	Description	<i>pbdom_attribute_name</i>	The name of the PBDOM_ATTRIBUTE	<i>timeValue</i>	A time value to be set for the PBDOM_ATTRIBUTE	<i>strTimeFormat</i>	The format in which the time value is to be set for the PBDOM_ATTRIBUTE, for example, HH:MM:SS
Argument	Description								
<i>pbdom_attribute_name</i>	The name of the PBDOM_ATTRIBUTE								
<i>timeValue</i>	A time value to be set for the PBDOM_ATTRIBUTE								
<i>strTimeFormat</i>	The format in which the time value is to be set for the PBDOM_ATTRIBUTE, for example, HH:MM:SS								

Character	Meaning	Example
H	Hour number with no leading zero	5
HH	Hour number with leading zero, if applicable	05
M	Minutes number with no leading zero	5
MM	Minutes number with leading zero, if applicable	05
S	Seconds number with no leading zero	5
SS	Seconds number with leading zero, if applicable	55

Return value PBDOM_ATTRIBUTE. The PBDOM_ATTRIBUTE from which the SetTimeValue method was invoked.

See also GetTimeValue

SetUIntValue

Description Sets the text value of a PBDOM_ATTRIBUTE object. The SetUIntValue method creates this text value by serializing the provided uint value into a string.

Syntax *pbdom_attribute_name*.SetUIntValue(unsignedinteger *uintValue*)

Argument	Description
<i>pbdom_attribute_name</i>	The name of the PBDOM_ATTRIBUTE
<i>uintValue</i>	A uint value to be set for the PBDOM_ATTRIBUTE

Return value PBDOM_ATTRIBUTE. The PBDOM_ATTRIBUTE from which the SetUIntValue method was invoked.

See also GetUIntValue

SetUlongValue

Description Sets the text value of a PBDOM_ATTRIBUTE object. The SetUlongValue method creates this text value by serializing the provided ulong value into a string.

Syntax *pbdom_attribute_name*.SetUlongValue(unsignedlong *ulongValue*)

Argument	Description
<i>pbdom_attribute_name</i>	The name of the PBDOM_ATTRIBUTE
<i>ulongValue</i>	A ulong value to be set for the PBDOM_ATTRIBUTE

Return value	PBDOM_ATTRIBUTE. The PBDOM_ATTRIBUTE from which the SetUlongValue method was invoked.
See also	GetUlongValue

About this chapter

This chapter describes the PBDOM_BUILDER class.

PBDOM_BUILDER

Description

The PBDOM_BUILDER class serves as a DOM factory that creates a PBDOM_DOCUMENT from various input sources, such as a string and a DataStore. A PBDOM_BUILDER class is not a PBDOM_OBJECT. There are no DOM objects to which you can map a PBDOM_BUILDER class.

The PBDOM_BUILDER methods can be contrasted with the PBDOM_DOCUMENT NewDocument methods (overloaded with several versions) that are intended to be used to build a PBDOM_DOCUMENT from scratch.

Methods

PBDOM_BUILDER has the following methods:

- BuildFromDataStore
- BuildFromFile
- BuildFromString
- GetParseErrors

BuildFromDataStore

Description

Builds a PBDOM_DOCUMENT from the referenced DataStore object.

Syntax

pbdom_builder_name.BuildFromDataStore(*datastore datastore_ref*)

Argument	Description
<i>pbdom_builder_name</i>	The name of a PBDOM_BUILDER object
<i>datastore_ref</i>	A DataStore object

Return value

PBDOM_DOCUMENT.

Throws	EXCEPTION_INVALID_ARGUMENT – The input DataStore object is invalid. This can happen if it has not been initialized properly or is a null object reference.
Examples	<p>The following PowerShell code fragment demonstrates how to use the BuildFromDataStore method with a referenced DataStore object.</p> <pre>PBDM_Builder pbdom_bldr pbdom_document pbdom_doc datastore ds ds = Create datastore ds.DataObject = "d_customer" ds.SetTransObject (SQLCA) ds.Retrieve() pbdom_doc = pbdom_bldr.BuildFromDataStore(ds)</pre> <p>In this example, a DataStore object <i>ds</i> is created and populated with data, and then passed to the BuildFromDataStore method. The BuildFromDataStore method causes the DataStore to export the data to XML, using the most current XML template for the DataStore, and then it uses the XML to build a PBDOM_DOCUMENT. The PBDOM_DOCUMENT object is assigned to <i>pbdom_doc</i>.</p>
Usage	<p>This method creates a temporary file in the directory pointed to by the user's TMP environment variable. If this directory is invalid, the temporary file is created in the <i>Windows\temp</i> directory.</p> <p>The encoding specified in the XML export template has no effect on the encoding of the document created using BuildFromDataStore. It always has UTF-16LE encoding.</p>
See also	BuildFromFile BuildFromString

BuildFromFile

Description	Builds a PBDOM_DOCUMENT from the file pointed to by the input URL string. The URL can be a local file path.
Syntax	<i>pbdom_builder_name</i> .BuildFromFile (string <i>strURL</i>)

Argument	Description
<i>pbdom_builder_name</i>	The name of a PBDOM_BUILDER object
<i>strURL</i>	A string that indicates the URL of the file from which to build a PBDOM_DOCUMENT

Return value	PBDOM_DOCUMENT.
Throws	EXCEPTION_MEMORY_ALLOCATION_FAILURE – If there is insufficient memory to create a PBDOM_DOCUMENT object.
Examples	Suppose the file <i>c:\pbdom_doc_1.xml</i> contains the following XML string:

```
<!DOCTYPE abc [<!ENTITY text "Some Text" >]>
<abc>
  <data>
    <child_data>Child Data Text</child_data>
    <child_data An_Attribute="Some Attribute Value"/>
    &text;
    <!--Comment String-->
    <![CDATA[Some CDATA String]]>
  </data>
</abc>
```

The file contains a Document Type Declaration that indicates that `<abc>` is the root element, and a declaration for the text entity that expands to "Some Text":

The root element `abc` contains a child element `data`, which contains five child PBDOM_OBJECTs: two PBDOM_ELEMENT objects, and PBDOM_TEXT, PBDOM_COMMENT, and PBDOM_CDATA objects.

The first `child_data` element contains a PBDOM_TEXT with the string "Child Data Text". The second `child_data` element contains no child PBDOM_OBJECTs but it does contain a PBDOM_ATTRIBUTE, `An_Attribute`, that contains the value "Some Attribute Value".

This example creates a PBDOM_DOCUMENT called `pbdom_doc` from *c:\pbdom_doc_1.xml*, tests the content of `pbdom_doc`, then saves the DOM tree contained within `pbdom_doc` into a separate file, *c:\pbdom_doc_2.xml*. The input and output files should be identical.

```
PBDOM_Builder      pbdom_bldr
PBDOM_Document    pbdom_doc
PBDOM_Object       pbdom_obj_array[]
PBDOM_Element      pbdom_elem
integer iFileNum1
long l = 0

// Create a PBDOM_DOCUMENT from the XML file
pbdom_bldr = Create PBDOM_Builder
pbdom_doc = pbdom_bldr.BuildFromFile &
("c:\pbdom_doc_1.xml")

// Test the contents of the PBDOM_DOCUMENT
// First test the PBDOM_DOCTYPE in the document
```

```
        MessageBox ("PBDOM_DOCTYPE GetName()", &
            pbdom_doc.GetDocType().GetName())
        MessageBox ("PBDOM_DOCTYPE GetInternalSubset()", &
            pbdom_doc.GetDocType().GetInternalSubset())

// Test the root element
        MessageBox ("PBDOM_DOC Root Element Name", &
            pbdom_doc.GetRootElement().GetName())

// test the root element's child element
        MessageBox ("PBDOM_DOC <data> Element Name", &
            pbdom_doc.GetRootElement().GetChildElement &
            ("data").GetName())

// Collect all the child PBDOM_OBJECTs of the
// <data> element
        pbdom_doc.GetRootElement().GetChildElement &
            ("data").GetContent(pbdom_obj_array)

// Display the class name, the name and the text
// contained
// within each PBDOM_OBJECT array item
        for l = 1 to UpperBound(pbdom_obj_array)
            MessageBox ("Child Object " + string(l) + " Class",&
                pbdom_obj_array[l].GetObjectClassString())
            MessageBox ("Child Object " + string(l) + " Name",&
                pbdom_obj_array[l].GetName())
            MessageBox ("Child Object " + string(l) + " Text",&
                pbdom_obj_array[l].GetText())
        next

// Retrieve and display the name and text value of the
// "An_Attribute" attribute from the <child_data>
// element
        pbdom_elem = pbdom_obj_array[2]
        MessageBox ("child_data Attribute name", &
            pbdom_elem.GetAttribute("An_Attribute").GetName())
        MessageBox ("child_data Attribute value", &
            pbdom_elem.GetAttribute("An_Attribute").GetText())

// save the DOM Tree contained within pbdom_doc into
// a separate file "c:\pbdom_doc_2.xml"
        pbdom_doc.SaveDocument ("c:\pbdom_doc_2.xml")

        Destroy pbdom_bldr
```

```

CATCH (PBDOM_Exception except)
    MessageBox ("Exception Occurred", except.Text)
END TRY

```

Usage	<p>The input URL string can be a local file path.</p> <p>The encoding specified in the XML export template determines the encoding of the document created using BuildFromFile.</p>
See also	<p>BuildFromDataStore</p> <p>BuildFromString</p>

BuildFromString

Description	Builds a PBDOM_DOCUMENT from a string.						
Syntax	<i>pbdom_builder_name</i> .BuildFromString(string <i>strXMLStream</i>)						
	<table> <tr> <th>Argument</th><th>Description</th></tr> <tr> <td><i>pbdom_builder_name</i></td><td>The name of a PBDOM_BUILDER object</td></tr> <tr> <td><i>strXMLStream</i></td><td>A string containing XML</td></tr> </table>	Argument	Description	<i>pbdom_builder_name</i>	The name of a PBDOM_BUILDER object	<i>strXMLStream</i>	A string containing XML
Argument	Description						
<i>pbdom_builder_name</i>	The name of a PBDOM_BUILDER object						
<i>strXMLStream</i>	A string containing XML						
Return value	PBDOM_DOCUMENT.						
Throws	<p>EXCEPTION_INVALID_ARGUMENT – The input string is invalid. This can happen if it has not been initialized properly or is a null object reference.</p> <p>EXCEPTION_MEMORY_ALLOCATION_FAILURE – Insufficient memory was encountered while executing this method.</p>						
Examples	<p>The following PowerScript code fragment demonstrates how to use the BuildFromString method with an input string. A string containing XML is passed to the BuildFromString method and the return value is assigned to a PBDOM_DOCUMENT.</p>						

```

PBDOM_Builder pbdom_bldr
pbdom_document pbdom_doc
string strXML

strXML = "<Music:abc xmlns:ZMusic="
strXML += "~"http://www.ZMusic.com~">"
strXML += "Root Element Data<data>ABC Data"
strXML += "<inner_data>My Inner Data</inner_data>"
strXML += "My Data</data></abc>"

pbdom_bldr = Create PBDOM_Builder
pbdom_doc = pbdom_bldr.BuildFromString (strXML)

```

Usage	The encoding specified in the XML export template determines the encoding of the document created using BuildFromString.
See also	BuildFromDataStore BuildFromFile

GetParseErrors

Description	Obtains a list of parsing errors detected during document parsing.						
Syntax	<i>pbdom_builder_name</i> .GetParseErrors(ref string <i>strErrorMessageArray</i> []) <table><tr><th>Argument</th><th>Description</th></tr><tr><td><i>pbdom_builder_name</i></td><td>The name of a PBDOM_BUILDER object</td></tr><tr><td><i>strErrorMessageArray</i></td><td>An unbounded array of strings, each of which will be filled with a formatted string containing a parse error.</td></tr></table>	Argument	Description	<i>pbdom_builder_name</i>	The name of a PBDOM_BUILDER object	<i>strErrorMessageArray</i>	An unbounded array of strings, each of which will be filled with a formatted string containing a parse error.
Argument	Description						
<i>pbdom_builder_name</i>	The name of a PBDOM_BUILDER object						
<i>strErrorMessageArray</i>	An unbounded array of strings, each of which will be filled with a formatted string containing a parse error.						
Return value	Boolean. Returns true if a list of parse errors has been retrieved and false otherwise. Also returns false if there are no parse errors.						
Throws	EXCEPTION_INVALID_ARGUMENT – The input string array is invalid. This can happen if it has not been initialised properly or is a null object reference. EXCEPTION_MEMORY_ALLOCATION_FAILURE – Insufficient memory was encountered while executing this method.						
Examples	The code in this example attempts to create a PBDOM_DOCUMENT based on the following XML:						

```
<!DOCTYPE root
[
<!ELEMENT root ANY>
<!ELEMENT data (#PCDATA)>
<!ENTITY text "Some Text">
]
>
<root><abc/><def/></root>
```

This XML is well formed but is not valid, because the element root contains two child elements abc and def that are not declared in the DOCTYPE. When GetParseErrors is called, it returns the value true, indicating that at least one parse error has occurred, and generates the following list of errors:

```
"1,103,Unknown element 'abc'"
"1,109,Unknown element 'def'"
```

The 1 in both error messages indicates that the error occurred in line 1 of the XML string, and the 103 and 109 indicate columns 103 and 109, respectively.

```
PBDOM_BUILDER pbdom_buildr
PBDOM_DOCUMENT pbdom_doc
long l = 0
string strXML = "<!DOCTYPE root [<!ELEMENT root
ANY><!ELEMENT data (#PCDATA)> <!ENTITY text ~\"Some
Text~\">]> <root><abc/><def/></root>"
string strParseErrors[]
BOOLEAN bRetTemp = FALSE

try
    pbdom_buildr = Create PBDOM_BUILDER
    pbdom_doc = pbdom_buildr.BuildFromString (strXML)
    bRetTemp = &
        pbdom_buildr.GetParseErrors(strParseErrors)

    if bRetTemp = true then
        for l = 1 to UpperBound(strParseErrors)
            MessageBox ("Parse Error", strParseErrors[l])
        next
    end if
catch (PBDOM_EXCEPTION pbdom_except)
    MessageBox ("PBDOM_EXCEPTION", &
        pbdom_except.GetMessage())
end try
```

Usage

This method retrieves a list of errors detected during the last parse operation performed by this PBDOM_BUILDER. Each string in the array has the following format:

[Line Number],[Column Number],[Error Message]

where *Line Number* and *Column Number* indicate the line number and column number in the XML document where the error was encountered. *Error Message* is the parse error message.

About this chapter

This chapter describes the PBDOM_CDATA class.

PBDOM_CDATA

Description

The PBDOM_CDATA class represents an XML DOM CDATA section. The PBDOM_CDATA class is derived from PBDOM_TEXT, which inherits from the PBDOM_CHARACTERDATA class.

A PBDOM_CDATA object is used to hold text that contains characters that are prohibited in text objects, such as “<” and “&”, without using entity references. For example, consider the following PBDOM_CDATA object:

```
<some_text>
  <![CDATA[ (x < y) & (y < z) => x < z ]]>
</some_text>
```

A PBDOM_TEXT object with the same text content must be written like this:

```
<some_text>
  (x &lt; y) &amp; (y &lt; z) =&gt; x &lt; z
</some_text>
```

However, although the PBDOM_CDATA class is derived from PBDOM_TEXT, a PBDOM_CDATA object cannot always be inserted in the same context as a PBDOM_TEXT. For example, a PBDOM_TEXT object can be added as a child of a PBDOM_ATTRIBUTE, but a PBDOM_CDATA object cannot.

Methods

Some of the inherited methods from PBDOM_OBJECT serve no meaningful objective, and only default or trivial functionalities result. These are described in the following table:

Method	Always returns
AddContent	current PBDOM_CDATA
GetContent	false
GetName	a string "#cdata"
HasChildren	false
InsertContent	current PBDOM_CDATA
IsAncestorObjectOf	false
RemoveContent	false
SetContent	current PBDOM_CDATA
SetName	false

PBDOM_CDATA has the following non-trivial methods:

- Append
- Clone
- Detach
- Equals
- GetObjectClass
- GetObjectClassString
- GetOwnerDocumentObject
- GetParentObject
- GetText
- GetTextNormalize
- GetTextTrim
- SetParentObject
- SetText

Append

Description

Appends the input string or the input text data of the PBDOM_CHARACTERDATA object to the text content that already exists within the current PBDOM_CDATA object.

Syntax

```
pbdom_cdata_name.Append(string strAppend)  
pbdom_cdata_name.Append(pbdom_characterdata  
pbdom_characterdata_ref)
```


Argument	Description
<i>pbdom_cdata_name</i>	The name of a PBDOM_CDATA
<i>strAppend</i>	The string you want appended to the existing text of the current PBDOM_CDATA object
<i>pbdom_characterdata_ref</i>	The referenced PBDOM_CHARACTERDATA object whose text data is to be appended to the existing text of the current PBDOM_CDATA object

Return value

PBDOM_CHARACTERDATA.

Throws

EXCEPTION_PBDOM_OBJECT_INVALID_FOR_USE – If the input PBDOM_CHARACTERDATA is not a reference to an object derived from PBDOM_CHARACTERDATA (applies to second syntax).

Clone

Description

Creates and returns a clone of the current PBDOM_CDATA.

Syntax

pbdom_cdata_name.Clone(boolean *bDeep*)

Argument	Description
<i>pbdom_cdata_name</i>	The name of a PBDOM_CDATA.
<i>bDeep</i>	A boolean specifying whether a deep or shallow clone is returned. Values are <code>true</code> for a deep clone and <code>false</code> for a shallow clone. This argument is currently ignored.

Return value

PBDOM_OBJECT. The return value is a clone of the current PBDOM_CDATA housed in a PBDOM_OBJECT.

Examples

This example tests the following characteristics of a cloned PBDOM_CDATA object:

- The contents of an original and cloned PBDOM_CDATA object are exactly the same
- A cloned PBDOM_CDATA initially has no parent object
- A cloned PBDOM_CDATA is initially contained within the same owner document as the original

```
PBDOM_BUILDER      pbdom_builder
PBDOM_DOCUMENT     pbdom_doc
PBDOM_CDATA        pbdom_cdat
PBDOM_OBJECT       pbdom_obj_array[]
string strXML = "<!DOCTYPE root [<!ELEMENT root
(#PCDATA)>]><root><![CDATA[This is a CDATA Section.]]></root>"

try
    // Build a PBDOM_DOCUMENT based on strXML.
    pbdom_builder = Create PBDOM_BUILDER
    pbdom_doc = pbdom_builder.BuildFromString (strXML)

    // Get the contents of the root element.
    pbdom_doc.GetRootElement().GetContent(pbdom_obj_array)

    // Test if the root element contains only one child object.
    if (UpperBound(pbdom_obj_array) = 1) then
        MessageBox ("Pass", "Root Element has only one child.")
    else
        MessageBox ("Fail", "Root Element must have only one child.")
    end if

    // Make a clone of the only child of the root element.
    pbdom_cdat = pbdom_obj_array[1].Clone(true)

    // Test if the clone is a PBDOM_CDATA object.
    if (pbdom_cdat.GetObjectClassString() = "pbdom_cdata") then
        MessageBox ("Pass", &
            "The first child, after being cloned, is indeed a PBDOM_CDATA object.")
    else
        MessageBox ("Fail", "The first child, after being cloned, " &
            + "is found to be a " + pbdom_cdat.GetObjectClassString() + " object.")
    end if

    // Test if the clone is a CDATA section.
    if (pbdom_cdat.GetText() = "This is a CDATA Section.") then
        MessageBox ("Pass", "The text contents of the clone is correct.")
    else
        MessageBox ("Fail", "The text contents of the clone is : [" &
            + pbdom_cdat.GetText() + "]. This is incorrect.")
    end if

    // Test that the clone has no parent.
    if (Not IsValid(pbdom_cdat.GetParentObject())) then
        MessageBox ("Pass", "The clone has no parent.")
    else
```

```

    MessageBox ("Fail", "The clone should have no parent.")
end if

// Test that the clone's owner document is the same
// as the original's owner document.
if (pbdom_cdat.GetOwnerDocumentObject() = pbdom_doc) then
    MessageBox ("Pass", "The clone's owner document is correct.")
else
    MessageBox ("Fail", "The clone's owner document is incorrect.")
end if

catch (PBDOM_EXCEPTION pbdom_except)
    MessageBox ("PBDOM_EXCEPTION", pbdom_except.GetMessage())
end try

```

Usage

The Clone method creates a new PBDOM_CDATA object that is a duplicate of, and a separate object from, the original. The clone of a PBDOM_CDATA is always identical to its original whether deep or shallow cloning is invoked, because a PBDOM_CDATA object does not contain any subtree of child PBDOM_OBJECTs.

A PBDOM_CDATA clone has no parent. However, the clone resides in the same PBDOM_DOCUMENT as its original, and if the original PBDOM_CDATA is standalone, the clone is standalone.

Detach**Description**

Detaches a PBDOM_CDATA from its parent PBDOM_OBJECT.

Syntax

pbdom_cdata_name.Detach()

Argument	Description
<i>pbdom_cdata_name</i>	The name of a PBDOM_CDATA

Return value

PBDOM_OBJECT. The current PBDOM_CDATA detached from its parent.

Usage

If the current PBDOM_CDATA object has no parent, no modifications occur.

Equals

Description	Tests for the equality of the current PBDOM_CDATA and a referenced PBDOM_OBJECT.							
Syntax	<i>pbdom_cdata_name</i> .Equals(<i>pbdom_object pbdom_object_ref</i>)							
	<table><tr><th>Argument</th><th>Description</th></tr><tr><td><i>pbdom_cdata_name</i></td><td>The name of a PBDOM_CDATA</td></tr><tr><td><i>pbdom_object_ref</i></td><td>A PBDOM_OBJECT to test for equality with the current PBDOM_CDATA</td></tr></table>	Argument	Description	<i>pbdom_cdata_name</i>	The name of a PBDOM_CDATA	<i>pbdom_object_ref</i>	A PBDOM_OBJECT to test for equality with the current PBDOM_CDATA	
Argument	Description							
<i>pbdom_cdata_name</i>	The name of a PBDOM_CDATA							
<i>pbdom_object_ref</i>	A PBDOM_OBJECT to test for equality with the current PBDOM_CDATA							
Return value	Boolean. Returns true if the current PBDOM_CDATA object is equivalent to the referenced PBDOM_OBJECT and false otherwise.							
Throws	EXCEPTION_PBDOM_OBJECT_INVALID_FOR_USE – If the input PBDOM_OBJECT is not a reference to an object derived from PBDOM_OBJECT.							
Usage	True is returned only if the referenced PBDOM_OBJECT is also a derived PBDOM_CDATA object and refers to the same DOM object as the current PBDOM_CDATA. Two separately created PBDOM_CDATA objects, for example, can contain exactly the same text but not be equal.							

GetObjectClass

Description	Returns a long integer code that indicates the class of the current PBDOM_OBJECT.					
Syntax	<i>pbdom_object_name</i> .GetObjectClass()					
	<table><tr><th>Argument</th><th>Description</th></tr><tr><td><i>pbdom_object_name</i></td><td>The name of a PBDOM_OBJECT</td></tr></table>	Argument	Description	<i>pbdom_object_name</i>	The name of a PBDOM_OBJECT	
Argument	Description					
<i>pbdom_object_name</i>	The name of a PBDOM_OBJECT					
Return value	Long. GetObjectClass returns a long integer code that indicates the class of the current PBDOM_OBJECT. If <i>pbdom_object_name</i> is a PBDOM_CDATA object, the returned value is 8.					
See also	GetObjectClassString					

GetObjectClassString

Description Returns a string form of the class of the PBDOM_OBJECT.

Syntax *pbdom_object_name*.GetObjectClassString()

Argument	Description
<i>pbdom_object_name</i>	The name of a PBDOM_OBJECT

Return value String. GetObjectClassString returns a string that indicates the class of the current PBDOM_OBJECT. If *pbdom_object_name* is a PBDOM_CDATA object, the returned string is “pbdom_cdata”.

See also GetObjectClass

GetOwnerDocumentObject

Description Returns the owning PBDOM_DOCUMENT of the current PBDOM_CDATA.

Syntax *pbdom_cdata_name*.GetOwnerDocumentObject()

Argument	Description
<i>pbdom_cdata_name</i>	The name of a PBDOM_CDATA

Return value PBDOM_OBJECT.

Usage If there is no owning PBDOM_DOCUMENT, null is returned.

See also GetParentObject
SetParentObject

GetParentObject

Description Returns the parent PBDOM_OBJECT of the PBDOM_CDATA. If there is no parent, null is returned.

Syntax *pbdom_cdata_name*.GetParentObject()

Argument	Description
<i>pbdom_cdata_name</i>	The name of a PBDOM_CDATA

Return value PBDOM_OBJECT.

See also GetOwnerDocumentObject
SetParentObject

GetText

Description Returns the text data that is contained within the current PBDOM_CDATA object.

Syntax *pbdom_cdata_name*.GetText()

Argument	Description
<i>pbdom_cdata_name</i>	The name of a PBDOM_CDATA

Return value String. The textual content of the current PBDOM_CDATA object.

See also GetTextNormalize
GetTextTrim
SetText

GetTextNormalize

Description Returns the text data that is contained within the current PBDOM_CDATA object, with all surrounding whitespace characters removed and internal whitespace characters normalized to a single space.

Syntax *pbdom_cdata_name*.GetTextNormalize()

Argument	Description
<i>pbdom_cdata_name</i>	The name of a PBDOM_CDATA

Return value String.

Usage If no textual value exists for the current PBDOM_OBJECT, or if only whitespace characters exist, an empty string is returned.

See also GetText
GetTextTrim
SetText

GetTextTrim

Description Returns the textual content of the current PBDOM_CDATA object with all surrounding whitespace characters removed.

Syntax *pbdom_cdata_name*.GetTextTrim()

Argument	Description
<i>pbdom_cdata_name</i>	The name of a PBDOM_CDATA

Return value	String.
Usage	If no textual value exists for the current PBDOM_CDATA, or if only whitespace characters exist, an empty string is returned.
See also	GetText GetTextNormalize SetText

SetParentObject

Description Sets the referenced PBDOM_OBJECT to be the parent of the current PBDOM_CDATA.

Syntax *pbdom_cdata_name*.SetParentObject(*pbdom_object pbdom_object_ref*)

Argument	Description
<i>pbdom_cdata_name</i>	The name of a PBDOM_CDATA
<i>pbdom_object_ref</i>	A PBDOM_OBJECT to be set as the parent of this PBDOM_CDATA object

Return value PBDOM_OBJECT.

Throws EXCEPTION_PBDOM_OBJECT_INVALID_FOR_USE – If the input PBDOM_OBJECT is not a reference to an object derived from PBDOM_OBJECT.

EXCEPTION_PBDOM_OBJECT_ALREADY_HAS_PARENT – If the current PBDOM_CDATA already has a parent.

EXCEPTION_INAPPROPRIATE_USE_OF_PBDOM_OBJECT – If the input PBDOM_OBJECT is of a class that does not have a legal parent-child relationship with the PBDOM_CDATA class.

EXCEPTION_USE_OF_UNNAMED_PBDOM_OBJECT – If the input PBDOM_OBJECT requires a user-defined name and it has not been named.

Usage The PBDOM_OBJECT that you set to be the parent of the current PBDOM_CDATA must have a legal parent-child relationship. If it does not, an exception is thrown. Only a PBDOM_ELEMENT object can be set as the parent of a PBDOM_CDATA object.

See also GetParentObject

SetText

Description Sets the input string to be the text content of the current PBDOM_CDATA object.

Syntax `pbdom_cdata_name.SetText(string strSet)`

Argument	Description
<i>pbdom_cdata_name</i>	The name of a PBDOM_CDATA
<i>strSet</i>	The string you want set as the text of the PBDOM_CDATA

Return value PBDOM_CHARACTERDATA. This PBDOM_CDATA modified and returned as a PBDOM_CHARACTERDATA object.

See also
GetText
GetTextNormalize
GetTextTrim

PBDOM_ENTITYREFERENCE Class

About this chapter

This chapter describes the PBDOM_ENTITYREFERENCE class.

PBDOM_ENTITYREFERENCE

Description

The PBDOM_ENTITYREFERENCE class defines behavior for an XML Entity reference Node. It allows you to insert entity references within element nodes as well as attribute nodes. The PBDOM_ENTITYREFERENCE class is derived from PBDOM_OBJECT.

Methods

Some of the inherited methods from PBDOM_OBJECT currently serve no meaningful objective, and only default or trivial functionalities result. These are described in the following table:

Method	Always returns
AddContent	current PBDOM_ENTITYREFERENCE
GetContent	false
GetText	an empty string
GetTextNormalize	an empty string
GetTextTrim	an empty string
HasChildren	false
InsertContent	current PBDOM_ENTITYREFERENCE
IsAncestorObjectOf	false
RemoveContent	false
SetContent	current PBDOM_ENTITYREFERENCE

PBDOM_ENTITYREFERENCE has the following non-trivial methods:

- Clone
- Detach
- Equals
- GetName

GetObjectClass
GetObjectClassString
GetOwnerDocumentObject
GetParentObject
SetName
SetParentObject

Clone

Description Creates and returns a clone of the current PBDOM_ENTITYREFERENCE object.

Syntax *pbdom_entityref_name*.Clone(boolean *bDeep*)

Argument	Description
<i>pbdom_entityref_name</i>	The name of a PBDOM_ENTITYREFERENCE object.
<i>bDeep</i>	A boolean specifying whether a deep or shallow clone is returned. Values are true for a deep clone and false for a shallow clone. This parameter is currently ignored.

Return value PBDOM_OBJECT. A clone of the current PBDOM_ENTITYREFERENCE object housed in a PBDOM_OBJECT.

Examples This example creates a PBDOM_DOCUMENT based on a string that contains an XML document, and creates a PBDOM_ENTITYREFERENCE object to reference the ENTITY my_er defined in the DOCTYPE. The DOCTYPE also indicates that the root element must contain zero or more child elements named child, and that each child can contain only parsed character data.

The FOR loop creates ten child elements and inserts a new clone of pbdom_er into each child element. You must use a clone, because the same object cannot be inserted as a child of more than one parent:

```
PBDOM_BUILDER                      pbdom_buildr
PBDOM_DOCUMENT                      pbdom_doc
PBDOM_ENTITYREFERENCE              pbdom_er
string strXML = "<!DOCTYPE root [<!ELEMENT root
(child)*><!ELEMENT child (#PCDATA)><!ENTITY my_er ~"MY
ENTITY~">]><root/>"
long l = 0

TRY
    pbdom_buildr = Create PBDOM_BUILDER
    pbdom_doc = pbdom_buildr.BuildFromString(strXML)
    pbdom_er = Create PBDOM_ENTITYREFERENCE
```

```
pbdom_er.SetName("my_er")

// Create 10 child elements for the root element
for l = 1 to 10
    PBDOM_ELEMENT pbdom_elem_child

    pbdom_elem_child = Create PBDOM_ELEMENT
    pbdom_elem_child.SetName("child")
    // Add a clone of pbdom_er as content
    pbdom_elem_child.AddContent(pbdom_er.Clone(true))

    pbdom_doc.GetRootElement(). &
        AddContent(pbdom_elem_child)
next

pbdom_doc.SaveDocument("clone_er.xml")
CATCH (PBDOM_EXCEPTION pbdom_e)
    MessageBox ("PBDOM_EXCEPTION", pbdom_e.GetMessage())
END TRY
```

When the PBDOM_DOCUMENT object is serialized, it produces the following XML document :

```
<!DOCTYPE root
[
<!ELEMENT root (child)*>
<!ELEMENT child (#PCDATA)*>
<!ENTITY my_er "MY ENTITY">
]
>
<root> <child>MY ENTITY</child>
<child>MY ENTITY</child>
<child>MY ENTITY</child>
<child>MY ENTITY</child>
<child>MY ENTITY</child>
<child>MY ENTITY</child>
<child>MY ENTITY</child>
<child>MY ENTITY</child>
<child>MY ENTITY</child>
<child>MY ENTITY</child>
</root>
```

Usage

The Clone method creates a new PBDOM_ENTITYREFERENCE object which is a duplicate of the original. A PBDOM_ENTITYREFERENCE object cannot contain any child PBDOM_OBJECTs, so there is no subtree beneath a PBDOM_ENTITYREFERENCE object. A shallow clone is therefore structurally no different than a deep clone of a PBDOM_ENTITYREFERENCE object.

This method allows you to use an entity reference node more than once. You cannot add a PBDOM_ENTITYREFERENCE object as the child of more than one PBDOM_OBJECT, but you can clone it and then add the clone as the child of another PBDOM_OBJECT.

A PBDOM_ENTITYREFERENCE clone does not have any parent. However, the clone resides in the same PBDOM_DOCUMENT as its original. If the original PBDOM_ENTITYREFERENCE object is standalone, the clone is also standalone.

Detach

Description

Detaches a PBDOM_ENTITYREFERENCE object from its parent PBDOM_OBJECT.

Syntax

pbdom_entityref_name.Detach()

Argument	Description
<i>pbdom_entityref_name</i>	The name of a PBDOM_ENTITYREFERENCE object

Return value

PBDOM_OBJECT. The current PBDOM_ENTITYREFERENCE object detached from its parent.

Usage

If the current PBDOM_ENTITYREFERENCE object has no parent, no modifications occur.

Equals

Description

Tests for the equality of the current PBDOM_ENTITYREFERENCE object and a referenced PBDOM_OBJECT.

Syntax

pbdom_entityref_name.Equals(*pbdom_object pbdom_object_ref*)

Argument	Description
<i>pbdom_entityref_name</i>	The name of a PBDOM_ENTITYREFERENCE object

Return value	Boolean. Returns true if the current PBDOM_ENTITYREFERENCE object is equivalent to the input PBDOM_OBJECT, and false otherwise.
Throws	EXCEPTION_PBDOM_OBJECT_INVALID_FOR_USE – If the input PBDOM_OBJECT is not an object derived from PBDOM_OBJECT.
Usage	This method returns true only if the referenced PBDOM_OBJECT is also a derived PBDOM_ENTITYREFERENCE object <i>and</i> it refers to the same DOM object as the current PBDOM_ENTITYREFERENCE object. Two separately created PBDOM_COMMENTS, for example, can contain exactly the same text but not be equal.

GetName

Description	Obtains the name of the current PBDOM_ENTITYREFERENCE object.				
Syntax	<i>pbdom_entityref_name</i> .GetName() <table> <tr> <th>Argument</th><th>Description</th></tr> <tr> <td><i>pbdom_entityref_name</i></td><td>The name of a PBDOM_ENTITYREFERENCE object</td></tr> </table>	Argument	Description	<i>pbdom_entityref_name</i>	The name of a PBDOM_ENTITYREFERENCE object
Argument	Description				
<i>pbdom_entityref_name</i>	The name of a PBDOM_ENTITYREFERENCE object				
Return value	String.				
See also	SetName				

GetObjectClass

Description	Returns a long integer code that indicates the class of the current PBDOM_OBJECT.				
Syntax	<i>pbdom_object_name</i> .GetObjectClass() <table> <tr> <th>Argument</th><th>Description</th></tr> <tr> <td><i>pbdom_object_name</i></td><td>The name of a PBDOM_OBJECT</td></tr> </table>	Argument	Description	<i>pbdom_object_name</i>	The name of a PBDOM_OBJECT
Argument	Description				
<i>pbdom_object_name</i>	The name of a PBDOM_OBJECT				
Return value	Long. A code that indicates the class of the current PBDOM_OBJECT. If <i>pbdom_object_name</i> is a PBDOM_ENTITYREFERENCE object, the returned value is 11.				
See also	GetObjectClassString				

GetObjectClassString

Description Returns a string form of the class of the PBDOM_OBJECT.

Syntax *pbdom_object_name*.GetObjectClassString()

Argument	Description
<i>pbdom_object_name</i>	The name of a PBDOM_OBJECT

Return value String. A string that indicates the class of the current PBDOM_OBJECT. If *pbdom_object_name* is a PBDOM_ENTITYREFERENCE object, the returned string is “pbdom_entityreference”.

See also GetObjectClass

GetOwnerDocumentObject

Description The GetOwnerDocumentObject method returns the owning PBDOM_DOCUMENT of the current PBDOM_ENTITYREFERENCE object.

Syntax *pbdom_entityref_name*.GetOwnerDocumentObject()

Argument	Description
<i>pbdom_entityref_name</i>	The name of a PBDOM_ENTITYREFERENCE object

Return value PBDOM_DOCUMENT.

Usage If there is no owning PBDOM_DOCUMENT, null is returned.

See also GetParentObject
SetParentObject

GetParentObject

Description The GetParentObject method returns the parent PBDOM_OBJECT of the current PBDOM_ENTITYREFERENCE object.

Syntax *pbdom_entityref_name*.GetParentObject()

Argument	Description
<i>pbdom_entityref_name</i>	The name of a PBDOM_ENTITYREFERENCE object

Return value PBDOM_OBJECT.

Usage The `GetParentObject` method returns the parent `PBDOM_OBJECT` of the current `PBDOM_ENTITYREFERENCE` object. If the `PBDOM_ENTITYREFERENCE` object has no parent, null is returned.

See also `GetOwnerDocumentObject`
`SetParentObject`

SetName

Description Changes the name of the `PBDOM_ENTITYREFERENCE` object, effectively making it refer to another DOM entity object.

Syntax `pbdom_entityref_name.SetName(string strName)`

Argument	Description
<i>pbdom_entityref_name</i>	The name of a <code>PBDOM_ENTITYREFERENCE</code> object
<i>strName</i>	The new name you want to set for the current <code>PBDOM_ENTITYREFERENCE</code> object

Return value Boolean. Returns true if the name of the current `PBDOM_ENTITYREFERENCE` object was changed, and false if it was not.

See also `GetName`

SetParentObject

Description The `SetParentObject` method sets the referenced `PBDOM_OBJECT` to be the parent of the current `PBDOM_ENTITYREFERENCE` object.

Syntax `pbdom_entityref_name.SetParentObject(pbdom_object pbdom_object_ref)`

Argument	Description
<i>pbdom_entityref_name</i>	The name of a <code>PBDOM_ENTITYREFERENCE</code> object
<i>pbdom_object_ref</i>	The <code>PBDOM_OBJECT</code> to be set as the parent of the current <code>PBDOM_ENTITYREFERENCE</code> object

Return value `PBDOM_OBJECT`.

Throws `EXCEPTION_PBDOM_OBJECT_INVALID_FOR_USE` – If the input `PBDOM_OBJECT` is not an object derived from `PBDOM_OBJECT`.
`EXCEPTION_PBDOM_OBJECT_ALREADY_HAS_PARENT` – If the current `PBDOM_ENTITYREFERENCE` object already has a parent.

EXCEPTION_INAPPROPRIATE_USE_OF_PBDOM_OBJECT – If the input PBDOM_OBJECT is of a class that does not have a legal parent-child relationship with the PBDOM_ENTITYREFERENCE class.

EXCEPTION_USE_OF_UNNAMED_PBDOM_OBJECT – If the input PBDOM_OBJECT requires a user-defined name and it has not been named, or the name of the entity reference object has not been set.

Usage

This method sets the input PBDOM_OBJECT to be the parent of this PBDOM_ENTITYREFERENCE object. The caller is responsible for ensuring that the current PBDOM_ENTITYREFERENCE object and the input PBDOM_OBJECT can have a legal parent-child relationship. Currently only a PBDOM_ELEMENT or a PBDOM_ATTRIBUTE can be set as the parent of a PBDOM_ENTITYREFERENCE object.

See also

GetOwnerDocumentObject
GetParentObject

PBDOM_CHARACTERDATA Class

About this document

This chapter describes the PBDOM_CHARACTERDATA class.

PBDOM_CHARACTERDATA

Description

The PBDOM_CHARACTERDATA class represents character-based content (not markup) within an XML document. It extends the PBDOM_OBJECT class with a set of methods specifically intended for manipulating character data in the DOM.

The PBDOM_CHARACTERDATA class is the parent class of three other PBDOM classes:

- PBDOM_TEXT
- PBDOM_CDATA
- PBDOM_COMMENT

The PBDOM_CHARACTERDATA class, like its parent class PBDOM_OBJECT, is a “virtual” class (similar to a virtual C++ class) in that it is not expected to be directly instantiated and used.

For example, in the following code, the attempt to set the text of `pbdom_chrdata` raises an exception:

```
PBDOM_CHARACTERDATA pbdom_chrdata
pbdom_chrdata = CREATE PBDOM_CHARACTERDATA
pbdom_chrdata.SetText ("character string");//error
```

In this example, the attempt to set the text of `pbdom_chrdata` succeeds because `pbdom_chrdata` is declared as a PBDOM_CHARACTERDATA but instantiated as a PBDOM_TEXT:

```
PBDOM_CHARACTERDATA pbdom_chrdata
pbdom_chrdata = CREATE PBDOM_TEXT
pbdom_chrdata.SetText ("character string");//success
```

Methods

Some of the inherited methods from PBDOM_OBJECT serve no meaningful objective and only default or trivial functionalities result. These are described in the following table:

Method	Always returns
AddContent	current PBDOM_CHARACTERDATA
GetContent	false
InsertContent	current PBDOM_CHARACTERDATA
RemoveContent	false
SetContent	current PBDOM_CHARACTERDATA
SetName	false

PBDOM_CHARACTERDATA has the following non-trivial methods:

- Append
- Clone
- Detach
- Equals
- GetName
- GetObjectClass
- GetObjectClassString
- GetOwnerDocumentObject
- GetParentObject
- GetText
- GetTextNormalize
- GetTextTrim
- HasChildren
- IsAncestorObjectOf
- SetParentObject
- SetText

Append

Description

The Append method is overloaded:

- Syntax 1 appends an input string to the text content that already exists within the current PBDOM_CHARACTERDATA object.
- Syntax 2 appends the text data of a PBDOM_CHARACTERDATA object to the text content that already exists within the current PBDOM_CHARACTERDATA object.

Syntax

For this syntax	See
<code>Append(string <i>strAppend</i>)</code>	Append Syntax 1
<code>Append(pbdom_characterdata <i>pbdom_characterdata_ref</i>)</code>	Append Syntax 2

Append Syntax 1

Description Appends an input string to the text content that already exists within the current PBDOM_CHARACTERDATA object.

Syntax `pbdom_text_name.Append(string strAppend)`

Argument	Description
<i>pbdom_text_name</i>	The name of a PBDOM_CHARACTERDATA object
<i>strAppend</i>	The string you want appended to the existing text of the current PBDOM_CHARACTERDATA object

Return value PBDOM_CHARACTERDATA. The current PBDOM_CHARACTERDATA modified and returned as a PBDOM_CHARACTERDATA object.

Throws EXCEPTION_PBDOM_OBJECT_INVALID_FOR_USE – If this PBDOM_CHARACTERDATA object is not a reference to an object derived from PBDOM_CHARACTERDATA.

Examples In this example, the PowerScript code builds a PBDOM_DOCUMENT based on the following DOM Tree:

```
<abc>
  <data>
    <child_1>
      My Text
    </child_1>
    <child_2>
      <!--My Comment-->
    </child_2>
    <child_3>
      <![CDATA[My CDATA]]>
    </child_3>
  </data>
</abc>
```

The root element `abc` has a child element, `data`, that has three child elements. `child_1` contains a child PBDOM_TEXT with the string “My Text”. `child_2` contains a child PBDOM_COMMENT with the string “My Comment”. `child_3` contains a child PBDOM_CDATA with the string “My CDATA”.

In the following PowerShell code, the single statement that follows the comment `// obtain the child PBDOM_TEXT of child_1` does the following:

- 1 Obtains the root element of the `PBDOM_DOCUMENT` `pbdom_doc` using `GetRootElement`. A new `PBDOM_ELEMENT` representing the root element `abc` is created in memory and returned.
- 2 Calls the `GetChildElement` method on the returned root `abc` `PBDOM_ELEMENT` using `data` as the parameter to single out the data child element. A `PBDOM_ELEMENT` representing the data element is created in memory and returned.
- 3 Calls the `GetChildElement` on the returned data `PBDOM_ELEMENT`, using `child_1` as the parameter to single out the `child_1` child element. A `PBDOM_ELEMENT` representing the `child_1` element is created in memory and returned.
- 4 Calls the `GetContent` method on the returned `child_1` `PBDOM_ELEMENT`, supplying a reference to the unbounded array `pbdom_chardata_array`.

You can supply `PBDOM_CHARACTERDATA` array instead of a `PBDOM_OBJECT` array because `PBDOM_CHARACTERDATA` is a subclass of `PBDOM_OBJECT`. However, `GetContent` fails if `child_1` contains any objects other than `PBDOM_CHARACTERDATA` objects.

Because `child_1` holds only the `PBDOM_TEXT` containing the string “My Text”, this statement returns an array that has only one array item. The next statement appends another string to the array item. The example then repeats these steps for `child_2` and `child_3` and saves `pbdom_doc` to a file:

```
PBDOM_Builder          pbdombuilder_new
pbdom_document         pbdom_doc
PBDOM_CHARACTERDATA    pbdom_chardata_array[]

string strXML = "<abc><data><child_1>My
Text</child_1><child_2><!--My Comment--
></child_2><child_3><![CDATA[My
CDATA]]></child_3></data></abc>"

TRY
    pbdombuilder_new = Create PBDOM_Builder
    pbdom_doc = pbdombuilder_new.BuildFromString (strXML)
```

```
// obtain the child PBDOM_TEXT of child_1
pbdom_doc.GetRootElement().GetChildElement("data").&
    GetChildElement("child_1"). &
    GetContent(pbdom_chardata_array)

// append the string "Now Appended" to the text
// returned by the call to GetContent
pbdom_chardata_array[1].Append (" Now Appended")

// repeat for child_2 and child_3
pbdom_doc.GetRootElement().GetChildElement("data").&
    GetChildElement("child_2"). &
    GetContent(pbdom_chardata_array)
pbdom_chardata_array[1].Append (" Now Appended")

pbdom_doc.GetRootElement().GetChildElement("data").&
    GetChildElement("child_3"). &
    GetContent(pbdom_chardata_array)
pbdom_chardata_array[1].Append (" Now Appended")

// save pbdom_doc to a file
pbdom_doc.SaveDocument ("c:\pbdom_doc_1.xml")

Destroy pbdombuilder_new

CATCH (PBDOM_Exception except)
    MessageBox ("Exception Occurred", except.Text)
END TRY
```

The saved file contains the following:

```
<abc>
  <data>
    <child_1>
      My Text Now Appended
    </child_1>
    <child_2>
      <!--My Comment Now Appended-->
    </child_2>
    <child_3>
      <![CDATA[My CDATA Now Appended]]>
    </child_3>
  </data>
</abc>
```

Append Syntax 2

Description	Appends the text data of a PBDOM_CHARACTERDATA object to the text content that already exists within the current PBDOM_CHARACTERDATA object.						
Syntax	<i>pbdom_text_name</i> .Append(<i>pbdom_characterdata pbdom_characterdata_ref</i>) <table><tr><th>Argument</th><th>Description</th></tr><tr><td><i>pbdom_text_name</i></td><td>The name of a PBDOM_CHARACTERDATA</td></tr><tr><td><i>pbdom_characterdata_ref</i></td><td>The referenced PBDOM_CHARACTERDATA object whose text data is to be appended to the existing text of the current PBDOM_CHARACTERDATA object</td></tr></table>	Argument	Description	<i>pbdom_text_name</i>	The name of a PBDOM_CHARACTERDATA	<i>pbdom_characterdata_ref</i>	The referenced PBDOM_CHARACTERDATA object whose text data is to be appended to the existing text of the current PBDOM_CHARACTERDATA object
Argument	Description						
<i>pbdom_text_name</i>	The name of a PBDOM_CHARACTERDATA						
<i>pbdom_characterdata_ref</i>	The referenced PBDOM_CHARACTERDATA object whose text data is to be appended to the existing text of the current PBDOM_CHARACTERDATA object						
Return value	PBDOM_CHARACTERDATA. The current PBDOM_CHARACTERDATA modified and returned as a PBDOM_CHARACTERDATA object.						
Throws	EXCEPTION_PBDOM_OBJECT_INVALID_FOR_USE – If the current PBDOM_CHARACTERDATA or the input PBDOM_CHARACTERDATA is not a reference to an object derived from PBDOM_CHARACTERDATA.						
Usage	Note that JDOM does not define an Append method for its CHARACTERDATA class. Because PBDOM implements its Append method in the base PBDOM_CHARACTERDATA class, a PBDOM_TEXT object, a PBDOM_CDATA object, and a PBDOM_TEXT object can append their internal text data to each other because they are all PBDOM_CHARACTERDATA-derived objects.						

Clone

Description	Creates and returns a clone of the current PBDOM_CHARACTERDATA.						
Syntax	<i>pbdom_chardata_name</i> .Clone(<i>boolean bDeep</i>) <table><tr><th>Argument</th><th>Description</th></tr><tr><td><i>pbdom_chardata_name</i></td><td>The name of a PBDOM_CHARACTERDATA.</td></tr><tr><td><i>bDeep</i></td><td>A boolean specifying whether a deep or shallow clone is returned. Values are true for a deep clone and false for a shallow clone. This argument is currently ignored.</td></tr></table>	Argument	Description	<i>pbdom_chardata_name</i>	The name of a PBDOM_CHARACTERDATA.	<i>bDeep</i>	A boolean specifying whether a deep or shallow clone is returned. Values are true for a deep clone and false for a shallow clone. This argument is currently ignored.
Argument	Description						
<i>pbdom_chardata_name</i>	The name of a PBDOM_CHARACTERDATA.						
<i>bDeep</i>	A boolean specifying whether a deep or shallow clone is returned. Values are true for a deep clone and false for a shallow clone. This argument is currently ignored.						
Return value	PBDOM_OBJECT.						

Throws	EXCEPTION_PBDOM_OBJECT_INVALID_FOR_USE – If this PBDOM_CHARACTERDATA is not a reference to an object derived from PBDOM_CHARACTERDATA.
Examples	This example creates a PBDOM_DOCUMENT based on the following DOM tree:

```
<abc>
  <data>Data</data>
</abc>
```

The PowerScript code obtains the data element of the root element as a PBDOM_ELEMENT and obtains an array of its children. The array has only one item, the PBDOM_TEXT containing the string “data”:

```
PBDOM_BUILDER pbdombuilder_new
PBDOM_DOCUMENT pbdom_doc
PBDOM_ELEMENT pbdom_elem
PBDOM_CHARACTERDATA pbdom_chardata_1
PBDOM_CHARACTERDATA pbdom_chardata_2
PBDOM_CHARACTERDATA pbdom_chardata_3
PBDOM_OBJECT pbdom_obj_array[]
string strXML = "<abc><data>Data</data></abc>"

TRY
    pbdombuilder_new = CREATE PBDOM_BUILDER
    pbdom_doc = pbdombuilder_new.BuildFromString
    (strXML)

    // get the data element, store in pbdom_elem,
    // and get an array of its children
    pbdom_elem = pbdom_doc.GetRootElement(). &
        GetChildElement("data")
    pbdom_elem.GetContent(pbdom_obj_array)
```

This PBDOM_TEXT is assigned into a PBDOM_CHARACTERDATA object, pbdom_chardata_1. Calling GetObjectClassString on pbdom_chardata_1 returns the class name of the actual object contained within it, pbdom_text. Calling GetText on it returns the string Data:

```
pbdom_chardata_1 = pbdom_obj_array[1]

MessageBox ("Class", &
    pbdom_chardata_1.GetObjectClassString())
MessageBox ("Text", pbdom_chardata_1.GetText())
```

Calling Clone on pbdom_chardata_1 creates a new PBDOM_CHARACTERDATA object. However, because the actual object referenced by pbdom_chardata_1 is a PBDOM_TEXT, the clone is a PBDOM_TEXT object.

Calling GetObjectClassString and GetText on the clone have the same result as for pbdom_chardata_1. The clone and the original object are separate objects and a call to Equals returns false:

```
pbdom_chardata_2 = pbdom_chardata_1.Clone(TRUE)

MessageBox ("Class", &
    pbdom_chardata_2.GetObjectClassString())
MessageBox ("Text", pbdom_chardata_2.GetText())

if (pbdom_chardata_1.Equals(pbdom_chardata_2)) then
    MessageBox ("Equals", &
        "pbdom_chardata_1 equals pbdom_chardata_2")
else
    MessageBox ("Equals", &
        "pbdom_chardata_1 NOT equals pbdom_chardata_2")
end if
```

However, a call to Equals returns true if the object being compared to pbdom_chardata_1 is a reference to pbdom_chardata_1:

```
pbdom_chardata_3 = pbdom_chardata_1
if (pbdom_chardata_1.Equals(pbdom_chardata_3)) then
    MessageBox ("Equals", &
        "pbdom_chardata_1 equals pbdom_chardata_3")
else
    MessageBox ("Equals", &
        "pbdom_chardata_1 NOT equals pbdom_chardata_3")
end if
```

```
DESTROY pbdombuilder_new
```

```
CATCH (PBDOM_Exception except)
    MessageBox ("Exception Occurred", except.Text)
END TRY
```

Usage

The Clone method creates a new PBDOM_CHARACTERDATA object which is a duplicate of, and a separate object from, the original. Calling Equals using these two objects returns false.

The clone of a PBDOM_CHARACTERDATA object is always identical to its original whether *bDeep* is true or false, because a PBDOM_CHARACTERDATA object contains no subtree of child PBDOM_OBJECTs.

A PBDOM_CHARACTERDATA clone has no parent, but it resides in the same PBDOM_DOCUMENT as its original, and if the original PBDOM_CHARACTERDATA is standalone, the clone is standalone.

Detach

Description Detaches a PBDOM_CHARACTERDATA object from its parent.

Syntax `pbdom_chardata_name.Detach()`

Argument	Description
<i>pbdom_chardata_name</i>	The name of a PBDOM_CHARACTERDATA object

Return value PBDOM_OBJECT.

Throws EXCEPTION_PBDOM_OBJECT_INVALID_FOR_USE – If this PBDOM_CHARACTERDATA is not a reference to an object derived from PBDOM_CHARACTERDATA.

Examples This example creates a PBDOM_DOCUMENT based on the following DOM tree:

```
<abc>
  <data>Data</data>
</abc>
```

The PowerShell code obtains the root element, uses it to obtain the child element, and then obtains an array of the child element's own children. This array has a single item, the PBDOM_TEXT object with the text Data. The array can be cast to a PBDOM_CHARACTERDATA object because it does not contain any objects that are not derived from PBDOM_CHARACTERDATA.

Calling Detach separates the PBDOM_TEXT object from its parent PBDOM_OBJECT, data.

```
PBDOM_Builder      pbdombuilder_new
pbdom_document     pbdom_doc
pbdom_document     pbdom_owner_doc
PBDOM_CHARACTERDATA pbdom_chardata
PBDOM_OBJECT       pbdom_obj_array[]
```

```
string strXML = "<abc><data>Data</data></abc>"

TRY
    pbdbuilder_new = Create PBDOM_Builder
    pbdom_doc = pbdbuilder_new.BuildFromString
    (strXML)

    pbdom_doc.GetRootElement(). &
        GetChildElement("data"). &
        GetContent(pbdom_obj_array)

    pbdom_chardata = pbdom_obj_array[1]
    pbdom_chardata.Detach()
    pbdom_doc.SaveDocument("c:\pbdom_doc_1.xml")
    Destroy pbdbuilder_new
CATCH (PBDOM_Exception except)
    MessageBox ("Exception Occurred", except.Text)
END TRY
```

When the document is saved to a file, the file’s contents are as follows, because the PBDOM_TEXT object was removed from data:

```
<abc>
    <data/>
</abc>
```

Usage Nothing occurs if the PBDOM_CHARACTERDATA object has no parent.

Equals

Description Tests for the equality of the current PBDOM_CHARACTERDATA and a referenced PBDOM_OBJECT.

Syntax pbdom_chardata_name.Equals(pbdom_object pbdom_object_ref)

Argument	Description
pbdom_chardata_name	The name of a PBDOM_CHARACTERDATA object
pbdom_object_ref	A reference to a PBDOM_OBJECT to test for equality with the current PBDOM_CHARACTERDATA object

Return value Boolean. Returns true if the current PBDOM_CHARACTERDATA is equivalent to the input PBDOM_OBJECT and false otherwise.

Throws	EXCEPTION_PBDOM_OBJECT_INVALID_FOR_USE – If this PBDOM_CHARACTERDATA is not a reference to an object derived from PBDOM_CHARACTERDATA.
Usage	True is returned only if the referenced PBDOM_OBJECT is also a derived PBDOM_CHARACTERDATA object and refers to the same DOM object as the current PBDOM_CHARACTERDATA. Two separately created PBDOM_COMMENTS, for example, can contain exactly the same text but are not equal.
See also	Clone

GetOwnerDocumentObject

Description	The GetOwnerDocumentObject method returns the owning PBDOM_DOCUMENT of the current PBDOM_CHARACTERDATA.				
Syntax	<i>pbdom_chardata_name</i> .GetOwnerDocumentObject() <table border="1"> <thead> <tr> <th>Argument</th><th>Description</th></tr> </thead> <tbody> <tr> <td><i>pbdom_chardata_name</i></td><td>The name of a PBDOM_CHARACTERDATA object</td></tr> </tbody> </table>	Argument	Description	<i>pbdom_chardata_name</i>	The name of a PBDOM_CHARACTERDATA object
Argument	Description				
<i>pbdom_chardata_name</i>	The name of a PBDOM_CHARACTERDATA object				
Return value	PBDOM_OBJECT.				
Throws	EXCEPTION_PBDOM_OBJECT_INVALID_FOR_USE – If this PBDOM_CHARACTERDATA is not associated with a derived PBDOM_CHARACTERDATA class.				
Examples	Example 1 This example creates a PBDOM_DOCUMENT based on the following DOM tree:				

```
<abc>
  <data>Data</data>
</abc>
```

The PowerShell code obtains the root element, uses it to obtain the child element, and then obtains an array of the child element's own children. This array has a single item, the PBDOM_TEXT object with the text Data. The array can be cast to a PBDOM_CHARACTERDATA object because it does not contain any objects that are not derived from PBDOM_CHARACTERDATA,

The call to GetOwnerDocumentObject returns a PBDOM_OBJECT, which is stored in a PBDOM_DOCUMENT called *pbdom_owner_doc*. The call to Equals tests whether the owner document of the "Data" PBDOM_TEXT and the main document, referenced using *pbdom_doc*, refer to the same document.

```
PBDOM_Builder          pbdombuilder_new
pbdom_document         pbdom_doc
pbdom_document         pbdom_owner_doc
pbdom_element          pbdom_elem
PBDOM_CHARACTERDATA    pbdom_chardata
PBDOM_OBJECT           pbdom_obj_array[]
string strXML = "<abc><data>Data</data></abc>"

TRY
    pbdombuilder_new = Create PBDOM_Builder
    pbdom_doc = pbdombuilder_new.BuildFromString
    (strXML)

    pbdom_elem = pbdom_doc.GetRootElement(). &
        GetChildElement("data")
    pbdom_elem.GetContent(pbdom_obj_array)

    pbdom_chardata = pbdom_obj_array[1]

    pbdom_owner_doc = &
        pbdom_chardata.GetOwnerDocumentObject()

    if (pbdom_doc.Equals(pbdom_owner_doc)) then
        MessageBox ("Equals", &
            "pbdom_doc Equals pbdom_owner_doc")
    else
        MessageBox ("Equals", &
            "pbdom_doc Not Equals pbdom_owner_doc")
    end if

    Destroy pbdombuilder_new

CATCH (PBDOM_Exception except)
    MessageBox ("Exception Occurred", except.Text)
END TRY
```

Example 2 This example creates a PBDOM_DOCUMENT based on the same DOM tree as example 1. It creates a PBDOM_TEXT, stores it in the PBDOM_CHARACTERDATA variable pbdom_chardata, and assigns it some text. Objects created in this way are standalone objects—they have no owner document or parent. Calling GetOwnerDocumentObject on pbdom_chardata returns null.

The code then adds pbdom_chardata as a child to the data element. This implicitly imports pbdom_chardata into the original document. pbdom_chardata now has an owner document and a parent (the data element). Calling GetOwnerDocumentObject on pbdom_chardata returns the original document. When the returned PBDOM_DOCUMENT has been assigned into pbdom_owner_doc, a call to Equals to compare pbdom_doc with pbdom_owner_doc returns true:

```
PBDOM_Builder          pbdombuilder_new
pbdom_document         pbdom_doc
pbdom_document         pbdom_owner_doc
PBDOM_CHARACTERDATA    pbdom_chardata
string strXML = "<abc><data>Data</data></abc>"

TRY
    pbdombuilder_new = Create PBDOM_Builder
    pbdom_doc = pbdombuilder_new.BuildFromString (strXML)

    pbdom_chardata = Create PBDOM_TEXT
    pbdom_chardata.SetText(" Some Text")

    if (IsValid (pbdom_chardata.GetOwnerDocumentObject())) then
        MessageBox ("Owner Document", &
            "PBDOM_TEXT (~'Some Text~') has an owner document.")
    else
        MessageBox ("Owner Document", &
            "PBDOM_TEXT (~'Some Text~') has NO owner document.")
    end if

    pbdom_doc.GetRootElement().GetChildElement("data"). &
        AddContent(pbdom_chardata)

    pbdom_owner_doc = pbdom_chardata.GetOwnerDocumentObject()

    if (pbdom_doc.Equals(pbdom_owner_doc)) then
        MessageBox ("Equals", "pbdom_doc Equals pbdom_owner_doc")
    else
        MessageBox ("Equals", "pbdom_doc Not Equals pbdom_owner_doc")
    end if

    Destroy pbdombuilder_new
    Destroy pbdom_chardata

CATCH (PBDOM_Exception except)
    MessageBox ("Exception Occurred", except.Text)
END TRY
```

Usage If there is no owning PBDOM_DOCUMENT, null is returned.

See also GetParentObject
 SetParentObject

GetName

Description The GetName method allows you to obtain the name of the current PBDOM_CHARACTERDATA.

Syntax *pbdom_chardata_name*.GetName()

Argument	Description
<i>pbdom_chardata_name</i>	The name of a PBDOM_CHARACTERDATA object

Return value String.

Throws EXCEPTION_PBDOM_OBJECT_INVALID_FOR_USE – If this PBDOM_CHARACTERDATA is not a reference to an object derived from PBDOM_CHARACTERDATA.

Usage The returned string depends on the specific type of DOM object that is contained within PBDOM_CHARACTERDATA.

Note
A PBDOM_CHARACTERDATA is abstract and is not to be instantiated into an object of its own. Thus, there is no name returned as “#characterdata”.

The following table lists the return values based on the type of DOM Object contained within PBDOM_CHARACTERDATA.

DOM Object	Return Value
PBDOM_CDATA	"#cdata-section"
PBDOM_COMMENT	"#comment"
PBDOM_TEXT	"#text"

GetObjectClass

Description The GetObjectClass method returns a long integer code that indicates the class of the current PBDOM_OBJECT.

Syntax *pbdom_object_name*.GetObjectClass()

	Argument	Description
	<i>pbdom_object_name</i>	The name of a PBDOM_OBJECT
Return value	<p>Long. GetObjectClass returns a long integer value that indicates the class of the current PBDOM_OBJECT.</p> <p>The possible return values for classes inherited from PBDOM_CHARACTERDATA are:</p> <ul style="list-style-type: none"> • 7 for PBDOM_TEXT • 8 for PBDOM_CDATA • 9 for PBDOM_COMMENT <p>The PBDOM_CHARACTERDATA class itself cannot be instantiated, so the class ID 6, for PBDOM_CHARACTERDATA, is never returned.</p>	
See also	GetObjectClassString	

GetObjectClassString

Description	The GetObjectClassString method returns a string form of the class of the PBDOM_OBJECT.	
Syntax	<i>pbdom_object_name</i> .GetObjectClassString()	
	Argument	Description
	<i>pbdom_object_name</i>	The name of a PBDOM_OBJECT
Return value	<p>String. GetObjectClassString returns a string that indicates the class of the current PBDOM_OBJECT.</p> <p>The possible return values for classes inherited from PBDOM_CHARACTERDATA are:</p> <ul style="list-style-type: none"> • pbdom_text • pbdom_cdata • pbdom_comment <p>The PBDOM_CHARACTERDATA class itself cannot be instantiated, so the string “pbdom_characterdata” is never returned.</p>	

Examples

This example creates a PBDOM_DOCUMENT based on the following DOM tree:

```
<abc>
  <data>
    Data with a &lt; character
    <!-- Comment with a &lt; character -->
    <![CDATA[ CDATA with an actual > character and
      an entity reference &lt; ]]>
  </data>
</abc>
```

The PowerShell code obtains the root element, uses it to obtain the child element, and then obtains an array of the child element's own children. This is an array of three PBDOM_OBJECTs, each of which is a child node of data. This array provides the ability to access and manipulate the child nodes, but to illustrate the virtual nature of the PBDOM_CHARACTERDATA class and the calling of methods of the PBDOM_CHARACTERDATA class, the example defines an array of PBDOM_CHARACTERDATA objects.

Each array item of the pbdom_obj_array is assigned to the pbdom_chardata array, so you can call the methods of each array item without needing to know what subclass the item belongs to.

Children must be subclasses of PBDOM_CHARACTERDATA

If the data element contained a child that was not a subclass of PBDOM_CHARACTERDATA, the FOR loop to assign each pbdom_obj_array item to a corresponding pbdom_chardata array item would fail when it reached that item.

The MessageBox calls illustrate how the entity reference < is handled by the different PBDOM_CHARACTERDATA subclasses. In the PBDOM_TEXT object, it is expanded. In the PBDOM_COMMENT and PBDOM_CDATA objects, it is not. The character to which the entity reference refers, ">", can also be included in a PBDOM_CDATA object.

```
PBDOM_Builder          pbdombuilder_new
pbdom_document         pbdom_doc
pbdom_element          pbdom_elem
PBDOM_CHARACTERDATA    pbdom_chardata[]
PBDOM_OBJECT           pbdom_obj_array[]
long l = 0
string strXML = "<abc><data>Data with a &lt;
character<!-- Comment with a &lt; character --
><![CDATA[ CDATA with an actual > character and an
entity reference &lt; ]]></data></abc>"
```



```

TRY
    pbdombuilder_new = Create PBDOM_Builder
    pbdom_doc = pbdombuilder_new.BuildFromString
    (strXML)

    pbdom_elem = pbdom_doc.GetRootElement(). &
        GetChildElement("data")
    pbdom_elem.GetContent(pbdom_obj_array)

    // populate an array of PBDOM_CHARACTERDATA objects
    for l = 1 to UpperBound(pbdom_obj_array)
        pbdom_chardata[l] = pbdom_obj_array[l]
    next
    for l = 1 to UpperBound(pbdom_chardata)
        MessageBox ("Class", &
            pbdom_chardata[l].GetObjectClassString())
        MessageBox ("Text", pbdom_chardata[l].GetText())
    next

    Destroy pbdombuilder_new

CATCH (PBDOM_Exception except)
    MessageBox ("Exception Occurred", except.Text)
END TRY

```

See also [GetObjectClass](#)

GetParentObject

Description The GetParentObject method returns the parent PBDOM_OBJECT of the current PBDOM_CHARACTERDATA.

Syntax *pbdom_chardata_name*.GetParentObject()

Argument	Description
<i>pbdom_chardata_name</i>	The name of a PBDOM_CHARACTERDATA object

Return value PBDOM_OBJECT.

Throws EXCEPTION_PBDOM_OBJECT_INVALID_FOR_USE – If this PBDOM_CHARACTERDATA is not a reference to an object derived from PBDOM_CHARACTERDATA.

Examples

This example creates a PBDOM_DOCUMENT based on the following DOM tree and demonstrates how a PBDOM_CHARACTERDATA INSTANCE can be detached from its parent:

```
<abc>
  <data>Data</data>
</abc>
```

The PowerScript code obtains the root element, uses it to obtain the child element, and then obtains an array of the child element's own children. This array has a single item, the PBDOM_TEXT object with the text Data. The array can be cast to a PBDOM_CHARACTERDATA object, because it does not contain any objects that are not derived from PBDOM_CHARACTERDATA.

The parent of pbdom_chardata_1 is the data element. The following steps detach it from its parent:

- Create a PBDOM_COMMENT in the PBDOM_CHARACTERDATA object pbdom_chardata_2 and assign to it the text "Some Comments".
- Set pbdom_chardata_2 as an array item of pbdom_obj_array.
- Call SetContent on the parent of pbdom_chardata_1 (the data element).

Calling SetContent resets the contents of data, which can cause its original contents (including pbdom_chardata_1) to be removed, depending on what is stored inside pbdom_obj_array. Because pbdom_obj_array contains only the newly created PBDOM_COMMENT, pbdom_chardata_2, data will have only this PBDOM_COMMENT as its child.

pbdom_chardata_1 will have no parent, because it has been silently detached from it. Calling GetParentObject on it will return null:

```
PBDOM_Builder      pbdombuilder_new
pbdom_document     pbdom_doc
pbdom_document     pbdom_owner_doc
PBDOM_CHARACTERDATA pbdom_chardata_1
PBDOM_CHARACTERDATA pbdom_chardata_2
PBDOM_OBJECT       pbdom_obj_array[]
string strXML = "<abc><data>Data</data></abc>"
```

TRY

```
pbdombuilder_new = Create PBDOM_Builder
pbdom_doc = pbdombuilder_new.BuildFromString (strXML)
```

```
pbdom_doc.GetRootElement(). &
  GetChildElement("data"). &
  GetContent(pbdom_obj_array)
```

```
pbdom_chardata_1 = pbdom_obj_array[1]

pbdom_chardata_2 = Create PBDOM_COMMENT
pbdom_chardata_2.SetText ("Some Comments")

pbdom_obj_array[1] = pbdom_chardata_2

pbdom_chardata_1.GetParentObject(). &
    SetContent (pbdom_obj_array)

if (IsValid(pbdom_chardata_1.GetParentObject())) then
    MessageBox ("Has Parent Object", &
        "PBDOMTEXT (~'Data~') has a parent")
else
    MessageBox ("Has Parent Object", &
        "PBDOMTEXT (~'Data~') has NO parent")
end if

pbdom_doc.SaveDocument ("c:\pbdom_doc_1.xml")

Destroy pbdombuilder_new
Destroy pbdom_chardata_2

CATCH (PBDOM_Exception except)
    MessageBox ("Exception Occurred", except.Text)
END TRY
```

When the resulting PBDOM_DOCUMENT is saved to a file, it looks like this:

```
<abc>
  <data>
    <!-- Some Comments -->
  </data>
</abc>
```

Usage	The parent is also an object derived from PBDOM_CHARACTERDATA. If the PBDOM_OBJECT has no parent, null is returned.
See also	SetParentObject

GetText

Description	Calling the GetText method allows you to obtain text data that is contained within the current PBDOM_CHARACTERDATA.				
Syntax	<i>pbdom_chardata_name</i> .GetText() <table><tr><th>Argument</th><th>Description</th></tr><tr><td><i>pbdom_chardata_name</i></td><td>The name of a PBDOM_CHARACTERDATA object</td></tr></table>	Argument	Description	<i>pbdom_chardata_name</i>	The name of a PBDOM_CHARACTERDATA object
Argument	Description				
<i>pbdom_chardata_name</i>	The name of a PBDOM_CHARACTERDATA object				
Return value	String. The text of the current PBDOM_CHARACTERDATA-derived object.				
Throws	Throws EXCEPTION_PBDOM_OBJECT_INVALID_FOR_USE – If this PBDOM_CHARACTERDATA is not a reference to an object derived from PBDOM_CHARACTERDATA.				
Usage	The following table lists the return values based on the type of DOM Object contained within PBDOM_CHARACTERDATA.				

DOM Object	Return Value
PBDOM_TEXT	<p>The text data contained within the PBDOM_TEXT object itself.</p> <p>For example, suppose you have the following element:</p> <pre><abc>MY TEXT</abc></pre> <p>If you have a PBDOM_TEXT object to represent the TEXT NODE “MY TEXT”, then calling GetText on the PBDOM_TEXT returns the string MY TEXT.</p>
PBDOM_CDATA	<p>The string data that is contained within the CDATA section itself. For example, suppose you have the following CDATA:</p> <pre><![CDATA[They're saying "x < y" & that "z > y" so I guess that means that z > x]]></pre> <p>If there is a PBDOM_CDATA to represent the above CDATA section, then calling GetText returns the string:</p> <pre>They're saying "x < y" & that "z > y" so I guess that means that z > x</pre>
PBDOM_COMMENT	<p>The comment itself. For example, suppose you have the following comment:</p> <pre><!--This is a comment. --></pre> <p>Calling GetText on the comment returns the string:</p> <pre>This is a comment.</pre>

See also	GetTextNormalize GetTextTrim SetText
----------	--

GetTextNormalize

Description The GetTextNormalize method allows you to obtain the text data that is contained within the current PBDOM_CHARACTERDATA object, with all surrounding whitespace characters removed and internal whitespace characters normalized to a single space.

Syntax *pbdom_chardata_name*.GetTextNormalize()

Argument	Description
<i>pbdom_chardata_name</i>	The name of a PBDOM_CHARACTERDATA object

Return value String. The following table lists the return values, based on the type of DOM object contained within PBDOM_CHARACTERDATA.

DOM Object	Return Value
PBDOM_TEXT	<p>Suppose you have the following element:</p> <pre><abc> MY TEXT </abc></pre> <p>If there is a PBDOM_TEXT object to represent the TEXT NODE "MY TEXT", then calling GetTextNormalize on the PBDOM_TEXT returns the string MY TEXT.</p>
PBDOM_CDATA	<p>Suppose there is the following CDATA:</p> <pre><![CDATA] They're saying "x < y" & that "z > y" so I guess that means that z > x]]></pre> <p>If there is a PBDOM_CDATA to represent the above CDATA section, then calling GetTextNormalize on it returns the string:</p> <pre>They're saying " x < y " & that "z > y" so I guess that means that z > x</pre> <p>Note that the initial spaces before "They're" and the trailing space after the last "x" are removed. Additionally, the spaces between the words "guess" and "that" are reduced to just one space.</p>
PBDOM_COMMENT	<p>Suppose there is the following comment:</p> <pre><!--This is a comment --></pre> <p>Calling GetTextNormalize on this comment returns:</p> <pre>This is a comment</pre>

Throws EXCEPTION_PBDOM_OBJECT_INVALID_FOR_USE – If this PBDOM_CHARACTERDATA is not a reference to an object derived from PBDOM_CHARACTERDATA.

Examples

This example demonstrates:

- 1 Using an external general parsed entity.
- 2 Using a single line statement to obtain the children PBDOM_OBJECTs of an element.
- 3 Obtaining the text of the three separate types of PBDOM_CHARACTERDATA objects : PBDOM_TEXT, PBDOM_COMMENT, and PBDOM_CDATA.
- 4 Obtaining the normalized text of the same three separate types of PBDOM_CHARACTERDATA objects.
- 5 The difference between the two types of text retrieved in 3 and 4.

Suppose the file *C:\entity_text.txt* contains the following string:

```
&#9;&#32;Some&#32;External&#32;&#32;&#9;&#32;Text&#32;&#9;
```

The example creates a PBDOM_DOCUMENT *pbdom_doc* based on the following DOM tree, which is in the file *C:\inputfile.txt*:

```
<!DOCTYPE abc [<!ENTITY text1 SYSTEM
"c:\entity_text.txt" >]>
<abc>
  <data>
    &text1;
    <!-- &text1;-->
    <![CDATA [&text1;]]>
  </data>
</abc>
```

The Document Type Declaration defines an external general parsed entity *text1*.

The example obtains the root element, uses it to obtain the data child element, and then obtains an array of the child element's own children. PBDOM collects all the PBDOM_OBJECTs that are the children of data and stores them in the PBDOM_OBJECT array *pbdom_obj_array*.

Next, the FOR loop iterates through all the items in `pbdom_obj_array` and stores each item in the `PBDOM_CHARACTERDATA` array `pbdom_chardata`. This step is not required—the `pbdom_obj_array` can be used to manipulate the data element's children. It is done to demonstrate that you can cast each item into a `PBDOM_CHARACTERDATA` object by assigning it into a `PBDOM_CHARACTERDATA` array. This is possible if and only if each `PBDOM_OBJECT` is also derived from `PBDOM_CHARACTERDATA`. If a `PBDOM_OBJECT` is not derived from `PBDOM_CHARACTERDATA`, the PowerBuilder VM throws an exception.

The next FOR loop iterates through all the items of the `pbdom_chardata` array and calls the `GetText` and `GetTextNormalize` methods on each. Each of the returned strings from `GetText` and `GetTextNormalize` is delimited by “[“ and “]” characters so that the complete text content displays clearly in the message boxes.

The first child of data is the `PBDOM_TEXT` `&text1;`, which has been declared as an external general parsed entity whose content is the content of the file `c:\entity_text.txt`. The `&text1;` entity reference and the entity references it contains are expanded by the parser. The call to `GetTextNormalize` strips away the whitespace characters.

The second child of data is the `PBDOM_COMMENT` `<!-- &text1;-->` and the third child is the `PBDOM_CDATA` `<![CDATA[&text1;]]>`. Entity references within comments and CDATA sections are never expanded. Both `GetText` and `GetTextNormalize` return `&text1;`.

```
PBDOM_Builder      pbdombuilder_new
pbdom_document     pbdom_doc
PBDOM_CHARACTERDATA pbdom_chardata[]
PBDOM_OBJECT       pbdom_obj_array[]
integer            iFileNum1
long               l = 0

TRY
  pbdombuilder_new = Create PBDOM_Builder
  pbdom_doc = pbdombuilder_new.BuildFromFile &
    ("C:\inputfile.txt")

  pbdom_doc.GetRootElement(). &
    GetChildElement("data"). &
    GetContent(pbdom_obj_array)

  for l = 1 to UpperBound(pbdom_obj_array)
    pbdom_chardata[l] = pbdom_obj_array[l]
  next
```

```
for l = 1 to UpperBound(pbdom_chardata)
    MessageBox(pbdom_chardata[l]. &
        GetObjectClassString() + "GetText()", &
        "[" + pbdom_chardata[l].GetText() + "]" )
    MessageBox (pbdom_chardata[l]. &
        GetObjectClassString() + " GetTextNormalize()", &
        "[" + pbdom_chardata[l].GetTextNormalize() + "]" )
next

Destroy pbdombuilder_new

CATCH (PBDOM_Exception except)
    MessageBox ("Exception Occurred", except.Text)
END TRY
```

Usage If no textual value exists for the current PBDOM_OBJECT, or if only whitespace characters exist, an empty string is returned.

See also GetText
GetTextTrim
SetText

GetTextTrim

Description The GetTextTrim method returns the textual content of the current PBDOM_CHARACTERDATA object with all surrounding whitespace characters removed.

Syntax pbdom_chardata_name.GetTextTrim()

Argument	Description
pbdom_chardata_name	The name of a PBDOM_CHARACTERDATA

Return value String.

DOM Object	Return Value
PBDOM_TEXT	The text data contained within the PBDOM_TEXT object itself with surrounding whitespace characters removed. For example, suppose there is the following element: <abc> MY TEXT </abc> If there is a PBDOM_TEXT object to represent the TEXT NODE “MY TEXT”, then calling GetTextTrim on the PBDOM_TEXT returns the string MY TEXT.

DOM Object	Return Value
PBDOM_CDATA	<p>The string data that is contained within the CDATA section itself with surrounding whitespace characters removed. For example, suppose there is the following CDATA:</p> <pre><![CDATA[They're saying "x < y" & that "z > y" so I guess that means that z > x]]></pre> <p>If there is a PBDOM_CDATA to represent the above CDATA section, then calling GetTextTrim on it returns the string:</p> <pre>They're saying " x < y " & that "z > y" so I guess that means that z > x</pre> <p>Note that the initial spaces before “They’re” and the trailing space after the last “x” are removed.</p>
PBDOM_COMMENT	<p>Suppose there is the following comment:</p> <pre><!-- This is a comment --></pre> <p>Calling GetTextTrim on this comment returns:</p> <pre>This is a comment</pre> <p>Note that the spaces between the individual words in the comment are preserved. Only the surrounding whitespace characters are removed.</p>

Throws

EXCEPTION_PBDOM_OBJECT_INVALID_FOR_USE – If this PBDOM_CHARACTERDATA is not a reference to an object derived from PBDOM_CHARACTERDATA.

Examples

This example demonstrates:

- 1 Using an External DTD.
- 2 Using a parameter entity.
- 3 Using a single line statement to obtain the children PBDOM_OBJECTs of an element.
- 4 Obtaining the text of the three separate types of PBDOM_CHARACTERDATA objects : PBDOM_TEXT, PBDOM_COMMENT, and PBDOM_CDATA.
- 5 Obtaining the trimmed text of the same three separate types of PBDOM_CHARACTERDATA objects.
- 6 The difference between the two types of text retrieved in 4 and 5.

The PowerScript code saves a string into an external file, then creates a PBDOM_DOCUMENT pbdom_doc based on the following DOM tree:

```
<!DOCTYPE abc SYSTEM "c:\external_entity.dtd">
<abc>
  <data>
    &text1;
    <!-- &text1;-->
    <![CDATA[&text1;]]>
  </data>
</abc>
```

c:\external_entity.dtd is an external Document Type Definition file. Its contents are the external subset of the Document Type Definition. The first line declares a PARAMETER entity param_entity_ref that contains the following replacement text:

```
&#32;&#32;&#32;PARAMETER ENTITY REFERENCE&#9;&#9;&#9;
```

The next line declares a general entity text1 that contains the following replacement text:

```
%param_entity_ref;
```

When the entity text1 is used in an XML document, it is expanded to the contents of the PARAMETER entity param_entity_ref.

The PowerScript code then obtains the root element, uses it to obtain the data child element, and then obtains an array of the child element's own children. PBDOM collects all the PBDOM_OBJECTs that are the children of data and stores them in the PBDOM_OBJECT array pbdom_obj_array.

Next, the FOR loop iterates through all the items in pbdom_obj_array and stores each item in the PBDOM_CHARACTERDATA array pbdom_chardata. This step is not required—the pbdom_obj_array can be used to manipulate the data element's children. It is done to demonstrate that you can cast each item into a PBDOM_CHARACTERDATA object by assigning it into a PBDOM_CHARACTERDATA array.

This is possible if and only if each PBDOM_OBJECT is also derived from PBDOM_CHARACTERDATA. If a PBDOM_OBJECT is not derived from PBDOM_CHARACTERDATA, the PowerBuilder VM throws an exception.

The next FOR loop iterates through all the items of the pbdom_chardata array and calls the GetText and GetTextTrim methods on each. Each of the returned strings from GetText and GetTextTrim is delimited by “[” and “]” characters so that the complete text content displays clearly in the message boxes.


```
        "[" + pbdom_chardata[l].GetText() + "]" )
        MessageBox (pbdom_chardata[l]. &
        GetObjectClassString() + " GetTextTrim()" , &
        "[" + pbdom_chardata[l].GetTextTrim() + "]" )
    next

    Destroy pbdombuilder_new

    CATCH (PBDOM_Exception except)
        MessageBox ("Exception Occurred", except.Text)
    END TRY
```

Usage If no textual value exists for the current PBDOM_CHARACTERDATA, or if only whitespace characters exist, an empty string is returned.

See also [GetText](#)
[GetTextNormalize](#)
[SetText](#)

HasChildren

Description This method returns true if this PBDOM_CHARACTERDATA has at least one child PBDOM_OBJECT. If this PBDOM_CHARACTERDATA has no children, false is returned.

Syntax *pbdom_chardata_name*.HasChildren()

Argument	Description
<i>pbdom_chardata_name</i>	The name of a PBDOM_CHARACTERDATA.

Return value Boolean.

Value	Description
true	The current PBDOM_CHARACTERDATA has at least one child PBDOM_OBJECT
false	The current PBDOM_CHARACTERDATA has no child PBDOM_OBJECTs

Throws EXCEPTION_PBDOM_OBJECT_INVALID_FOR_USE – If this PBDOM_CHARACTERDATA is not a reference to an object derived from PBDOM_CHARACTERDATA.

Usage If the PBDOM_CHARACTERDATA has at least one child PBDOM_OBJECT, true is returned. False is returned if there are no children.

Currently, false is always returned because no subclasses of PBDOM_CHARACTERDATA contain child nodes.

IsAncestorObjectOf

Description The IsAncestorObjectOf method determines whether the current PBDOM_CHARACTERDATA is the ancestor of another PBDOM_OBJECT.

Syntax *pbdom_chardata_name*.IsAncestorObjectOf(*pbdom_object* *pbdom_object_ref*)

Argument	Description
<i>pbdom_chardata_name</i>	The name of a PBDOM_CHARACTERDATA
<i>pbdom_object_ref</i>	A PBDOM_OBJECT to check against

Return value Boolean. Returns true if the current PBDOM_CHARACTERDATA is the ancestor of the referenced PBDOM_OBJECT, and false otherwise.

Throws EXCEPTION_PBDOM_OBJECT_INVALID_FOR_USE – If this PBDOM_CHARACTERDATA is not a reference to an object derived from PBDOM_CHARACTERDATA.

Usage Currently, false is always returned because no subclasses of PBDOM_CHARACTERDATA contain child nodes. Therefore, they cannot be ancestors of a PBDOM_OBJECT.

SetParentObject

Description The SetParentObject method sets the referenced PBDOM_OBJECT to be the parent of the current PBDOM_CHARACTERDATA.

Syntax *pbdom_chardata_name*.SetParentObject(*pbdom_object* *pbdom_object_ref*)

Argument	Description
<i>pbdom_chardata_name</i>	The name of a PBDOM_CHARACTERDATA
<i>pbdom_object_ref</i>	A PBDOM_OBJECT to be set as the parent of this PBDOM_CHARACTERDATA object

Return value PBDOM_OBJECT.

Throws

EXCEPTION_PBDOM_OBJECT_INVALID_FOR_USE – If this **PBDOM_CHARACTERDATA** is not a reference to an object derived from **PBDOM_CHARACTERDATA**. This exception also occurs if the input **PBDOM_OBJECT** is not a reference to an object derived from **PBDOM_OBJECT**.

EXCEPTION_PBDOM_OBJECT_ALREADY_HAS_PARENT – If the current **PBDOM_CHARACTERDATA** already has a parent.

EXCEPTION_INAPPROPRIATE_USE_OF_PBDOM_OBJECT – If the input **PBDOM_OBJECT** is of a class that does not have a proper parent-child relationship with the class of this **PBDOM_CHARACTERDATA**.

EXCEPTION_USE_OF_UNNAMED_PBDOM_OBJECT – If the input **PBDOM_OBJECT** requires a user-defined name, and it has not been named.

Examples

This example creates a **PBDOM_DOCUMENT** based on the following DOM tree:

```
<abc>
  <data>
    <child_1/>
    <child_2/>
    <child_3/>
  </data>
</abc>
```

The code creates three separate types of **PBDOM_CHARACTERDATA** objects and stores them in the **pbdom_chardata** array. It then obtains the root element, uses it to obtain the data child element, and then uses that to obtain the first child element, which it sets as the parent of the first item in the **pbdom_chardata** array.

The text of the array item is set to **Comment**. You can set the string content of any **PBDOM_CHARACTERDATA** object after you have set it as the child of a parent.

The same process is repeated for the text and CDATA objects:

```
PBDOM_Builder      pbdombuilder_new
pbdom_document     pbdom_doc
PBDOM_CHARACTERDATA pbdom_chardata[]
PBDOM_ELEMENT      pbdom_elem
long               = 0
string strXML =
"<abc><data><child_1/><child_2/><child_3/></data></abc>"
">"
```

```
TRY
    pbdombuilder_new = Create PBDOM_Builder
    pbdom_doc = pbdombuilder_new.BuildFromString (strXML)

    pbdom_chardata[1] = Create PBDOM_COMMENT
    pbdom_chardata[2] = Create PBDOM_TEXT
    pbdom_chardata[3] = Create PBDOM_CDATA

    pbdom_elem = pbdom_doc.GetRootElement(). &
        GetChildElement("data").GetChildElement("child_1")
    pbdom_chardata[1].SetParentObject (pbdom_elem)
    pbdom_chardata[1].SetText ("Comment")

    pbdom_elem = pbdom_doc.GetRootElement(). &
        GetChildElement("data").GetChildElement("child_2")
    pbdom_chardata[2].SetParentObject (pbdom_elem)
    pbdom_chardata[2].SetText ("Text")

    pbdom_elem = pbdom_doc.GetRootElement(). &
        GetChildElement("data").GetChildElement("child_3")
    pbdom_chardata[3].SetParentObject (pbdom_elem)
    pbdom_chardata[3].SetText ("CDATA")

    pbdom_doc.SaveDocument ("c:\pbdom_doc_1.xml")

    Destroy pbdombuilder_new

CATCH (PBDOM_Exception except)
    MessageBox ("Exception Occurred", except.Text)
END TRY
```

When the PBDOM_DOCUMENT is saved to a file, the output DOM tree looks like this:

```
<abc>
  <data>
    <child_1>
      <!--Comment-->
    </child_1>
    <child_2>
      Text
    </child_2>
    <child_3>
      <![CDATA[CDATA]]>
    </child_3>
  </data>
</abc>
```

Usage	The PBDOM_OBJECT that you set to be the parent of the current PBDOM_CHARACTERDATA must have a legal parent-child relationship. If it does not, an exception is thrown.
See also	GetParentObject

SetText

Description	The SetText method sets the input string to be the text content of the current PBDOM_CHARACTERDATA object.						
Syntax	<i>pbdom_chardata_name</i> .SetText(string <i>strSet</i>) <table><tr><th>Argument</th><th>Description</th></tr><tr><td><i>pbdom_chardata_name</i></td><td>The name of a PBDOM_CHARACTERDATA</td></tr><tr><td><i>strSet</i></td><td>The string you want set as the text of the PBDOM_CHARACTERDATA</td></tr></table>	Argument	Description	<i>pbdom_chardata_name</i>	The name of a PBDOM_CHARACTERDATA	<i>strSet</i>	The string you want set as the text of the PBDOM_CHARACTERDATA
Argument	Description						
<i>pbdom_chardata_name</i>	The name of a PBDOM_CHARACTERDATA						
<i>strSet</i>	The string you want set as the text of the PBDOM_CHARACTERDATA						
Return value	PBDOM_CHARACTERDATA. The current PBDOM_CHARACTERDATA object modified.						
Throws	EXCEPTION_PBDOM_OBJECT_INVALID_FOR_USE – If this PBDOM_CHARACTERDATA is not a reference to an object derived from PBDOM_CHARACTERDATA.						
Usage	The SetText method sets the input string to be the text content of the current PBDOM_CHARACTERDATA object.						
See also	GetText GetTextNormalize GetTextTrim						

About this chapter

This chapter describes the PBDOM_COMMENT class.

PBDOM_COMMENT

Description

The PBDOM_COMMENT class represents a DOM Comment Node within an XML document. The PBDOM_COMMENT class is derived from the PBDOM_CHARACTERDATA class and is intended to extend the PBDOM_CHARACTERDATA class with a set of methods intended specifically for manipulating DOM comment nodes.

You can use comments to annotate an XML document with user-readable information.

In PBDOM, when a document is parsed, any comments found within the document persist as part of the resultant DOM tree in memory. A PBDOM_COMMENT created at runtime also becomes part of the DOM tree. However, an XML comment does not usually form part of the content model of a document.

The presence or absence of comments has no bearing on a document's validity. There is no requirement that comments must be predeclared in a DTD.

Methods

Some of the inherited methods from PBDOM_OBJECT serve no meaningful objective, and only default or trivial functionalities result. These are described in the following table:

Method	Always returns
AddContent	current PBDOM_COMMENT
GetContent	false
GetName	a string "#comment"
HasChildren	false
InsertContent	current PBDOM_COMMENT
IsAncestorObjectOf	false
RemoveContent	false

Method	Always returns
SetContent	current PBDOM_COMMENT
SetName	false

PBDOM_COMMENT has the following non-trivial methods:

- Append
- Clone
- Detach
- Equals
- GetObjectClass
- GetObjectClassString
- GetOwnerDocumentObject
- GetParentObject
- GetText
- GetTextNormalize
- GetTextTrim
- SetParentObject
- SetText

Append

Description

The Append method is overloaded:

- Syntax 1 appends an input string to the text content that already exists within the current PBDOM_COMMENT object.
- Syntax 2 appends the text data of a PBDOM_CHARACTERDATA object to the text content that already exists within the current PBDOM_COMMENT object.

Syntax

For this syntax	See
Append(string <i>strAppend</i>)	Append Syntax 1
Append(pbdom_characterdata <i>pbdom_characterdata_ref</i>)	Append Syntax 2

Append Syntax 1

Description Appends an input string to the text content that already exists within the current PBDOM_COMMENT object.

Syntax `pbdom_comment_name.Append(string strAppend)`

Argument	Description
<i>pbdom_comment_name</i>	The name of a PBDOM_COMMENT
<i>strAppend</i>	The string you want to append to the existing text of the current PBDOM_COMMENT object

Return value PBDOM_CHARACTERDATA. The current PBDOM_COMMENT modified and returned as a PBDOM_CHARACTERDATA object.

Append Syntax 2

Description Appends the text data of a PBDOM_CHARACTERDATA object to the text content that exists within the current PBDOM_COMMENT object.

Syntax `pbdom_comment_name.Append(pbdom_characterdata pbdom_characterdata_ref)`

Argument	Description
<i>pbdom_comment_name</i>	The name of a PBDOM_COMMENT
<i>pbdom_characterdata_ref</i>	The referenced PBDOM_CHARACTERDATA object whose text data is to be appended to the existing text of the current PBDOM_COMMENT object

Return value PBDOM_CHARACTERDATA. The current PBDOM_COMMENT modified and returned as a PBDOM_CHARACTERDATA object.

Throws EXCEPTION_PBDOM_OBJECT_INVALID_FOR_USE – If the input PBDOM_CHARACTERDATA is not a reference to a PBDOM_CHARACTERDATA-derived object.

Usage Note that JDOM does not define an Append method for its COMMENT class. Because PBDOM implements its Append method in the base PBDOM_CHARACTERDATA class, a PBDOM_TEXT object, a PBDOM_CDATA object, and a PBDOM_COMMENT object can append their internal text data to each other because they are all PBDOM_CHARACTERDATA-derived objects.

Clone

Description

Syntax

Creates and returns a clone of the current PBDOM_COMMENT.
pbdom_comment_name.Clone(boolean *bDeep*)

Argument	Description
<i>pbdom_comment_name</i>	The name of a PBDOM_COMMENT
<i>bDeep</i>	A boolean specifying whether a deep or shallow clone is returned. Values are true for a deep clone and false for a shallow clone

Return value

Examples

PBDOM_OBJECT.

This example creates an XML document that, when serialized, appears as follows :

```
<!DOCTYPE root
[
<!ELEMENT root (level_1)*>
<!ELEMENT level_1 (level_2)*>
<!ELEMENT level_2 (#PCDATA)*>
]>
<root>
  <level_1>
    <!--Element at level : 1-->
    <level_2>
      <!--Element at level : 2-->
    </level_2>
  </level_1>
</root>
```

The definition of the DTD shows that the document is required to have the following composition:

- The document contains a root element with the name root.
- The root element contains zero or more occurrences of level_1 elements.
- A level_1 element contains zero or more level_2 elements.
- A level_2 element is expected to contain text.

The following PowerScript code supplies annotations within the document by including comments to mark level_1 and level_2 elements. The sample code creates a PBDOM_DOCUMENT from an XML string that contains a DTD and a minimal root element. Then, it creates a comment that serves as a template. The template comment is then cloned, and instance-specific text is added for each element:

```
PBDOM_COMMENT pbdom_comm
PBDOM_COMMENT pbdom_comm_clone
PBDOM_ELEMENT pbdom_elem
PBDOM_DOCUMENT pbdom_doc
PBDOM_BUILDER pbdom_buildr
string strXML = "<!DOCTYPE root [<!ELEMENT root
(level_1)*><!ELEMENT level_1 (level_2)*><!ELEMENT
level_2 (#PCDATA)>]><root/>"

try
    // Create a PBDOM_DOCUMENT from the XML string that
    // contains a DTD and a minimal root element.
    pbdom_buildr = Create PBDOM_BUILDER
    pbdom_doc = pbdom_buildr.BuildFromString(strXML)

    // Create a template comment that can be reused.
    pbdom_comm = Create PBDOM_COMMENT
    pbdom_comm.SetText ("Element at level : ")

    // Create a level_1 element.
    pbdom_elem = Create PBDOM_ELEMENT
    pbdom_elem.SetName("level_1")

    // Clone the template comment, append instance-
    // specific text, and add it to the level_1 element.
    pbdom_comm_clone = pbdom_comm.Clone(true)
    pbdom_elem.AddContent(pbdom_comm_clone.Append("1"))

    // Add a level_1 element into the root element
    // as stipulated by the DTD.
    pbdom_doc.GetRootElement().AddContent(pbdom_elem)

    // Create a level_2 element.
    pbdom_elem = Create PBDOM_ELEMENT
    pbdom_elem.SetName("level_2")

    // Clone the template comment, append instance-
    // specific text, and add it to the level_2 element.
    pbdom_comm_clone = pbdom_comm.Clone(true)
```

```
pbdom_elem.AddContent (pbdom_comm_clone.Append ("2"))

// Add a level_2 element into the level_1 element
// as stipulated by the DTD.
pbdom_doc.GetRootElement().GetChildElement &
("level_1").AddContent (pbdom_elem)

// Finally, serialize the document.
pbdom_doc.SaveDocument ("sample.xml")

catch (PBDOM_EXCEPTION pbdom_e)
    MessageBox ("PBDOM_EXCEPTION", pbdom_e.GetMessage())
end try
```

Usage The Clone method creates a new PBDOM_COMMENT object that is a duplicate of, and a separate object from, the original. Whether true or false is supplied, the clone is always identical to its original, because a PBDOM_COMMENT does not contain a subtree of child PBDOM_OBJECTs.

A PBDOM_COMMENT clone has no parent. However, the clone resides in the same PBDOM_DOCUMENT as its original, and if the original is standalone, the clone is standalone.

Detach

Description Detaches a PBDOM_COMMENT from its parent PBDOM_OBJECT.

Syntax *pbdom_comment_name*.Detach()

Argument	Description
<i>pbdom_comment_name</i>	The name of a PBDOM_COMMENT

Return value PBDOM_OBJECT.

The current PBDOM_COMMENT is detached from its parent.

Usage If the current PBDOM_COMMENT object has no parent, no modifications occur.

Equals

Description	Tests for the equality of the current PBDOM_COMMENT and a referenced PBDOM_OBJECT.						
Syntax	<i>pbdom_comment_name</i> .Equals(<i>pbdom_object pbdom_object_ref</i>)						
	<table> <tr> <th>Argument</th><th>Description</th></tr> <tr> <td><i>pbdom_comment_name</i></td><td>The name of a PBDOM_COMMENT.</td></tr> <tr> <td><i>pbdom_object_ref</i></td><td>A PBDOM_OBJECT to test for equality with the current PBDOM_COMMENT</td></tr> </table>	Argument	Description	<i>pbdom_comment_name</i>	The name of a PBDOM_COMMENT.	<i>pbdom_object_ref</i>	A PBDOM_OBJECT to test for equality with the current PBDOM_COMMENT
Argument	Description						
<i>pbdom_comment_name</i>	The name of a PBDOM_COMMENT.						
<i>pbdom_object_ref</i>	A PBDOM_OBJECT to test for equality with the current PBDOM_COMMENT						
Return value	Boolean. Returns true if the current PBDOM_COMMENT is equivalent to the input PBDOM_OBJECT, and false otherwise.						
Throws	EXCEPTION_PBDOM_OBJECT_INVALID_FOR_USE – If the referenced PBDOM_OBJECT is not a reference to an object derived from a PBDOM_OBJECT object.						
Usage	True is returned only if the referenced PBDOM_OBJECT is also a derived PBDOM_COMMENT object and refers to the same DOM object as the current PBDOM_COMMENT. Two separately created PBDOM_COMMENTS, for example, can contain exactly the same text but are not equal.						

GetObjectClass

Description	Returns a long integer code that indicates the class of the current PBDOM_OBJECT.				
Syntax	<i>pbdom_object_name</i> .GetObjectClass()				
	<table> <tr> <th>Argument</th><th>Description</th></tr> <tr> <td><i>pbdom_object_name</i></td><td>The name of a PBDOM_OBJECT</td></tr> </table>	Argument	Description	<i>pbdom_object_name</i>	The name of a PBDOM_OBJECT
Argument	Description				
<i>pbdom_object_name</i>	The name of a PBDOM_OBJECT				
Return value	Long. GetObjectClass returns a long integer code that indicates the class of the current PBDOM_OBJECT. If <i>pbdom_object_name</i> is a PBDOM_COMMENT, the returned value is 9.				
See also	GetObjectClassString				

GetObjectClassString

Description Returns a string form of the class of the PBDOM_OBJECT.

Syntax *pbdom_object_name*.GetObjectClassString()

Argument	Description
<i>pbdom_object_name</i>	The name of a PBDOM_OBJECT

Return value String. GetObjectClassString returns a string that indicates the class of the current PBDOM_OBJECT. If *pbdom_object_name* is a PBDOM_COMMENT, the returned string is “pbdom_comment”.

See also GetObjectClass

GetOwnerDocumentObject

Description Returns the owning PBDOM_DOCUMENT of the current PBDOM_COMMENT.

Syntax *pbdom_comment_name*.GetOwnerDocumentObject()

Argument	Description
<i>pbdom_comment_name</i>	The name of a PBDOM_COMMENT

Return value PBDOM_OBJECT.

Usage If there is no owning PBDOM_DOCUMENT, null is returned.

GetParentObject

Description Returns the parent PBDOM_OBJECT of the current PBDOM_COMMENT.

Syntax *pbdom_comment_name*.GetParentObject()

Argument	Description
<i>pbdom_comment_name</i>	The name of a PBDOM_COMMENT

Return value PBDOM_OBJECT.

Usage The GetParentObject method returns the parent PBDOM_OBJECT of the current PBDOM_COMMENT. If the PBDOM_COMMENT has no parent, null is returned.

See also SetParentObject

GetText

Description	Allows you to obtain the text data that is contained within the current PBDOM_COMMENT object.				
Syntax	<i>pbdom_comment_name</i> .GetText() <table> <tr> <th>Argument</th><th>Description</th></tr> <tr> <td><i>pbdom_comment_name</i></td><td>The name of a PBDOM_COMMENT</td></tr> </table>	Argument	Description	<i>pbdom_comment_name</i>	The name of a PBDOM_COMMENT
Argument	Description				
<i>pbdom_comment_name</i>	The name of a PBDOM_COMMENT				
Return value	String. The textual content of the current PBDOM_COMMENT object.				
Examples	If you have the comment <!--A COMMENT-->, the GetText method returns the string A COMMENT.				
See also	GetTextNormalize GetTextTrim SetText				

GetTextNormalize

Description	Allows you to obtain the text data that is contained within the current PBDOM_COMMENT object, with all surrounding whitespace characters removed and internal whitespace characters normalized to a single space.				
Syntax	<i>pbdom_comment_name</i> .GetTextNormalize() <table> <tr> <th>Argument</th><th>Description</th></tr> <tr> <td><i>pbdom_comment_name</i></td><td>The name of a PBDOM_COMMENT</td></tr> </table>	Argument	Description	<i>pbdom_comment_name</i>	The name of a PBDOM_COMMENT
Argument	Description				
<i>pbdom_comment_name</i>	The name of a PBDOM_COMMENT				
Return value	String.				
Examples	If you have the comment <!-- A COMMENT -->, which has three spaces before and after the text and between the two words, the GetTextNormalize method returns the string A COMMENT, which has a single space between the words.				
Usage	This method allows the caller to obtain the text data that is contained within the current PBDOM_COMMENT with all surrounding whitespace characters removed and internal whitespace characters normalized to single spaces. If no textual value exists for the current PBDOM_COMMENT, or if only whitespace characters exist, an empty string is returned.				
See also	GetText GetTextTrim SetText				

GetTextTrim

Description	Returns the textual content of the current PBDOM_COMMENT object with all surrounding whitespace characters removed.				
Syntax	<div><i>pbdom_comment_name</i>.GetTextTrim()</div> <table><tr><th>Argument</th><th>Description</th></tr><tr><td><i>pbdom_comment_name</i></td><td>The name of a PBDOM_COMMENT</td></tr></table>	Argument	Description	<i>pbdom_comment_name</i>	The name of a PBDOM_COMMENT
Argument	Description				
<i>pbdom_comment_name</i>	The name of a PBDOM_COMMENT				
Return value	String.				
Examples	If you have the comment <code><!-- A COMMENT --></code> , which has three spaces before and after the text and between the two words, the <code>GetTextTrim</code> method returns the string <code>A COMMENT</code> . The whitespace characters between the words are preserved.				
Usage	This method allows the caller to obtain the text data that is contained within the current PBDOM_COMMENT with all surrounding whitespace characters removed. Internal whitespace characters are preserved. If no textual value exists for the current PBDOM_COMMENT, or if only whitespace characters exist, an empty string is returned.				
See also	GetText GetTextNormalize SetText				

SetParentObject

Description	Sets the referenced PBDOM_OBJECT to be the parent of the current PBDOM_COMMENT.						
Syntax	<div><i>pbdom_comment_name</i>.SetParentObject(<i>pbdom_object pbdom_object_ref</i>)</div> <table><tr><th>Argument</th><th>Description</th></tr><tr><td><i>pbdom_comment_name</i></td><td>The name of a PBDOM_COMMENT</td></tr><tr><td><i>pbdom_object_ref</i></td><td>A PBDOM_OBJECT to be set as the parent of the current PBDOM_COMMENT</td></tr></table>	Argument	Description	<i>pbdom_comment_name</i>	The name of a PBDOM_COMMENT	<i>pbdom_object_ref</i>	A PBDOM_OBJECT to be set as the parent of the current PBDOM_COMMENT
Argument	Description						
<i>pbdom_comment_name</i>	The name of a PBDOM_COMMENT						
<i>pbdom_object_ref</i>	A PBDOM_OBJECT to be set as the parent of the current PBDOM_COMMENT						
Return value	PBDOM_OBJECT.						
Throws	<div>EXCEPTION_PBDOM_OBJECT_INVALID_FOR_USE – If the input PBDOM_OBJECT is not a reference to an object derived from PBDOM_OBJECT.</div> <div>EXCEPTION_PBDOM_OBJECT_ALREADY_HAS_PARENT – If the current PBDOM_COMMENT already has a parent.</div>						

EXCEPTION_INAPPROPRIATE_USE_OF_PBDOM_OBJECT – If the input **PBDOM_OBJECT** is of a class that does not have a proper parent-child relationship with the **PBDOM_COMMENT** class.

EXCEPTION_USE_OF_UNNAMED_PBDOM_OBJECT – If the input **PBDOM_OBJECT** requires a user-defined name, and it has not been named.

Usage

This method sets the input **PBDOM_OBJECT** as the parent of this **PBDOM_COMMENT**. The caller is responsible for ensuring that the current **PBDOM_COMMENT** and the input **PBDOM_OBJECT** can have a legal parent-child relationship. Currently, only a **PBDOM_ELEMENT** and a **PBDOM_DOCUMENT** can be set as the parent of a **PBDOM_COMMENT**.

The **PBDOM_COMMENT** **SetParentObject** method differs from the **JDOM Comment** **setParent** method in two ways:

- **JDOM** defines a **setParent** method for several specific classes, including **Element**, **Comment**, and **CDATA**. **PBDOM** implements the **SetParentObject** method in the base **PBDOM_OBJECT** class to allow for polymorphism.
- The **JDOM Comment**'s **setParent** method takes only an **Element** class object as a parameter:

```
COMMENT::setParent (Element parent)
```

To set a **Document** as the parent owner of a **Comment** using **JDOM**, you use the **setDocument** method:

```
COMMENT::setDocument (Document document)
```

In **PBDOM**, **SetParentObject** takes a reference to a **PBDOM_OBJECT**, so that both a **PBDOM_ELEMENT** and a **PBDOM_DOCUMENT** can be set as a parent.

See also

GetOwnerDocumentObject
GetParentObject

SetText

Description

Sets the input string to be the text content of the current **PBDOM_COMMENT** object.

Syntax

```
pbdom_comment_name.SetText(string strSet)
```

Argument	Description
<i>pbdom_comment_name</i>	The name of a PBDOM_COMMENT

	Argument	Description
	<i>strSet</i>	The string you want set as the text of the PBDOM_COMMENT
Return value	String.	
See also	GetText GetTextNormalize GetTextTrim	

About this chapter

This chapter describes the PBDOM_DOCTYPE class.

PBDOM_DOCTYPE

Description

The PBDOM_DOCTYPE class represents the Document Type Declaration Object of an XML DOM Document. The PBDOM_DOCTYPE class provides access to the name of the root element that is constrained within the DOCTYPE as well as the internal subset, system, and public IDs.

Methods

Some of the inherited methods from PBDOM_OBJECT serve no meaningful objective and only default or trivial functionalities result. These are described in the following table:

Method	Always returns
AddContent	The current PBDOM_DOCTYPE
GetContent	false
GetText	Empty string
GetTextNormalize	Empty string
GetTextTrim	Empty string
HasChildren	false
InsertContent	The current PBDOM_DOCTYPE
IsAncestorObjectOf	false
RemoveContent	false
SetContent	The current PBDOM_DOCTYPE

PBDOM_DOCTYPE has the following non-trivial methods:

- Clone
- Detach
- Equals
- GetInternalSubset
- GetName

GetObjectClass
GetObjectClassString
GetOwnerDocumentObject
GetParentObject
GetPublicID
GetSystemID
SetDocument
SetInternalSubset
SetName
SetParentObject
SetPublicID
SetSystemID

Clone

Description	Creates and returns a clone of the current PBDOM_DOCTYPE.						
Syntax	<i>pbdom_doctype_name</i> .Clone(boolean <i>bDeep</i>)						
	<table><tr><th>Argument</th><th>Description</th></tr><tr><td><i>pbdom_doctype_name</i></td><td>The name of a PBDOM_DOCTYPE object.</td></tr><tr><td><i>bDeep</i></td><td>A boolean specifying whether a deep or shallow clone is returned. Values are TRUE for a deep clone and FALSE for a shallow clone. This argument is currently ignored.</td></tr></table>	Argument	Description	<i>pbdom_doctype_name</i>	The name of a PBDOM_DOCTYPE object.	<i>bDeep</i>	A boolean specifying whether a deep or shallow clone is returned. Values are TRUE for a deep clone and FALSE for a shallow clone. This argument is currently ignored.
Argument	Description						
<i>pbdom_doctype_name</i>	The name of a PBDOM_DOCTYPE object.						
<i>bDeep</i>	A boolean specifying whether a deep or shallow clone is returned. Values are TRUE for a deep clone and FALSE for a shallow clone. This argument is currently ignored.						
Return value	PBDOM_OBJECT. A deep clone of the current PBDOM_DOCTYPE housed in a PBDOM_OBJECT.						
Usage	<p>A PBDOM_DOCTYPE clone (whether shallow or deep) is always an exact copy of its original. This is because a PBDOM_DOCTYPE does not contain any subtree of child PBDOM_OBJECTs.</p> <p>A PBDOM_DOCTYPE clone has no parent. However, the clone resides in the same PBDOM_DOCUMENT as its original. If the original PBDOM_DOCTYPE is standalone, the clone is standalone.</p>						

Detach

Description Detaches a PBDOM_DOCTYPE object from its parent PBDOM_DOCUMENT object. The detached PBDOM_DOCTYPE object is still part of the PBDOM_DOCUMENT object in which it resided before the Detach method was invoked, but it no longer has a parent PBDOM_DOCUMENT object.

Syntax `pbdom_doctype_name.Detach()`

Argument	Description
<code>pbdom_doctype_name</code>	The name of a PBDOM_DOCTYPE object

Return value PBDOM_OBJECT. The PBDOM_DOCTYPE object modified and returned as a PBDOM_OBJECT object.

Equals

Description Tests for the equality of the current PBDOM_DOCTYPE and a referenced PBDOM_OBJECT.

Syntax `pbdom_doctype_name.Equals(pbdom_object_ref)`

Argument	Description
<code>pbdom_doctype_name</code>	The name of a PBDOM_DOCTYPE object
<code>pbdom_object_ref</code>	A PBDOM_OBJECT to test for equality with the current PBDOM_DOCTYPE

Return value Boolean. Returns true if the current PBDOM_DOCTYPE is equivalent to the input PBDOM_OBJECT, and false otherwise.

Usage True is returned only if the referenced PBDOM_OBJECT is also a PBDOM_DOCTYPE and refers to the same DOM Doctype object as the current PBDOM_DOCTYPE.

GetInternalSubset

Description Returns the internal subset data of the DOCTYPE.

Syntax `pbdom_doctype_name.GetInternalSubset()`

Argument	Description
<code>pbdom_doctype_name</code>	The name of a PBDOM_DOCTYPE object

Return value String.
See also SetInternalSubset

GetName

Description Allows you to obtain the name of the root element that is being constrained within the current PBDOM_DOCTYPE.

Syntax *pbdom_doctype_name*.GetName()

Argument	Description
<i>pbdom_doctype_name</i>	The name of a PBDOM_DOCTYPE object

Return value String.

Examples If you have the following DOCTYPE declaration, the GetName method returns abc.

```
<!DOCTYPE abc [<!-- internal subset -->
<!ELEMENT abc (#PCDATA)> <!ELEMENT data (#PCDATA)>
<!ELEMENT inner_data (#PCDATA)>]>
```

GetObjectClass

Description Returns a long integer code that indicates the class of the current PBDOM_OBJECT.

Syntax *pbdom_object_name*.GetObjectClass()

Argument	Description
<i>pbdom_object_name</i>	The name of a PBDOM_OBJECT

Return value Long. A long integer code that indicates the class of the current PBDOM_OBJECT. If *pbdom_object_name* is a PBDOM_DOCTYPE, the returned value is 4.

GetObjectClassString

Description Returns a string form of the class of the PBDOM_OBJECT.

Syntax *pbdom_object_name*.GetObjectClassString()

Argument	Description
<i>pbdom_object_name</i>	The name of your PBDOM_OBJECT

Return value String. A string that indicates the class of the current PBDOM_OBJECT. If *pbdom_object_name* is a PBDOM_DOCTYPE, the returned string is “pbdom_doctype”.

GetOwnerDocumentObject

Description Returns the owning PBDOM_DOCUMENT of the current PBDOM_DOCTYPE.

Syntax *pbdom_doctype_name*.GetOwnerDocumentObject()

Argument	Description
<i>pbdom_doctype_name</i>	The name of a PBDOM_DOCTYPE object

Return value PBDOM_OBJECT.

Usage If there is no owning PBDOM_DOCUMENT, null is returned.

GetParentObject

Description Returns the parent PBDOM_OBJECT of the current PBDOM_DOCTYPE.

Syntax *pbdom_doctype_name*.GetParentObject()

Argument	Description
<i>pbdom_doctype_name</i>	The name of a PBDOM_DOCTYPE object

Return value PBDOM_OBJECT.

Usage The parent is also a PBDOM_DOCUMENT object. If the PBDOM_OBJECT has no parent, null is returned.

GetPublicID

Description Retrieves the public ID of an externally reference DTD declared in the DOCTYPE.

Syntax *pbdom_doctype_name*.GetPublicID()

	<table><tr><th>Argument</th><th>Description</th></tr><tr><td><i>pbdom_doctype_name</i></td><td>The name of a PBDOM_DOCTYPE object</td></tr></table>	Argument	Description	<i>pbdom_doctype_name</i>	The name of a PBDOM_DOCTYPE object
Argument	Description				
<i>pbdom_doctype_name</i>	The name of a PBDOM_DOCTYPE object				
Return value	String. If no public ID is referenced, an empty string is returned.				
Examples	<p>Suppose you have the following DTD declaration:</p> <pre><!DOCTYPE Books PUBLIC "-//MyCompany//DTD//EN" "http://mycompany.com/dtd/mydoctype.dtd"></pre> <p>The following PowerScript code displays the public and system IDs in message boxes:</p> <pre>pbdom_doctype pbdom_doctype_1 pbdom_document pbdom_doc pbdom_doctype_1 = pbdom_doc.GetDocType() MessageBox ("DocType Public ID", & pbdom_doctype_1.GetPublicID()) MessageBox ("DocType System ID", & pbdom_doctype_1.GetSystemID())</pre> <p>The returned strings from the calls to <code>GetPublicID</code> and <code>GetSystemID</code> are:</p> <pre>"-//MyCompany//DTD//EN" "http://mycompany.com/dtd/mydoctype.dtd"</pre>				
See also	<code>GetSystemID</code> <code>SetPublicID</code> <code>SetSystemID</code>				

GetSystemID

Description	Retrieves the system ID of an externally referenced DTD declared in the DOCTYPE.				
Syntax	<i>pbdom_doctype_name</i> .GetSystemID()				
	<table><tr><th>Argument</th><th>Description</th></tr><tr><td><i>pbdom_doctype_name</i></td><td>The name of a PBDOM_DOCTYPE object</td></tr></table>	Argument	Description	<i>pbdom_doctype_name</i>	The name of a PBDOM_DOCTYPE object
Argument	Description				
<i>pbdom_doctype_name</i>	The name of a PBDOM_DOCTYPE object				
Return value	String. If no system ID is referenced, an empty string is returned.				
Examples	See <code>GetPublicID</code> .				
See also	<code>GetPublicID</code> <code>SetPublicID</code> <code>SetSystemID</code>				

SetDocument

Description	Sets the owning PBDOM_DOCUMENT of the current PBDOM_DOCTYPE.						
Syntax	<i>pbdom_doctype_name</i> .SetDocument(<i>pbdom_document</i> <i>pbdom_document_ref</i>)						
	<table> <tr> <th>Argument</th><th>Description</th></tr> <tr> <td><i>pbdom_doctype_name</i></td><td>The name of a PBDOM_DOCTYPE object</td></tr> <tr> <td><i>pbdom_document_ref</i></td><td>A PBDOM_DOCUMENT object to be set as the owner document of this PBDOM_DOCTYPE object</td></tr> </table>	Argument	Description	<i>pbdom_doctype_name</i>	The name of a PBDOM_DOCTYPE object	<i>pbdom_document_ref</i>	A PBDOM_DOCUMENT object to be set as the owner document of this PBDOM_DOCTYPE object
Argument	Description						
<i>pbdom_doctype_name</i>	The name of a PBDOM_DOCTYPE object						
<i>pbdom_document_ref</i>	A PBDOM_DOCUMENT object to be set as the owner document of this PBDOM_DOCTYPE object						
Return value	PBDOM_DOCTYPE. The current PBDOM_DOCTYPE modified to be the DOCTYPE of the referenced PBDOM_DOCUMENT.						
Throws	<p>EXCEPTION_PBDOM_OBJECT_INVALID_FOR_USE – if the input PBDOM_DOCUMENT object is invalid for use in any way.</p> <p>EXCEPTION_PBDOM_OBJECT_ALREADY_HAS_PARENT – if this current PBDOM_DOCTYPE already has a parent PBDOM_OBJECT. In this case, this PBDOM_DOCTYPE is already the DOCTYPE of some document.</p>						
Usage	A DOM DOCTYPE object can have no owner document, or it can have an owner document but no parent node. A DOCTYPE that has an owner document as well as a parent node is the actual DOCTYPE of the owner document.						
See also	SetParentObject						

SetInternalSubset

Description	Sets the data for the internal subset of the PBDOM_DOCTYPE.				
Syntax	<i>pbdom_doctype_name</i> .SetInternalSubset()				
	<table> <tr> <th>Argument</th><th>Description</th></tr> <tr> <td><i>pbdom_doctype_name</i></td><td>The name of a PBDOM_DOCTYPE object</td></tr> </table>	Argument	Description	<i>pbdom_doctype_name</i>	The name of a PBDOM_DOCTYPE object
Argument	Description				
<i>pbdom_doctype_name</i>	The name of a PBDOM_DOCTYPE object				
Return value	PBDOM_DOCTYPE. The current PBDOM_DOCTYPE with the new internal subset.				
Examples	Suppose you have the following DTD declaration:				

```
<!DOCTYPE abc [

```

The following code displays the internal subset in a message box:

```
string strInternalSubset
```

```
pbdom_document pbdom_doc

strInternalSubset = pbdom_doc.GetDocType().GetInternalSubset()
strInternalSubset += "<!-- internal subset --> <!-- ELEMENT abc (#PCDATA) -->
<!-- ELEMENT data (#PCDATA) --> <!-- ELEMENT inner_data
(#PCDATA) --> <!-- ELEMENT another_data (#PCDATA) -->"
pbdom_doc.GetDocType().SetInternalSubset (strInternalSubset)
MessageBox ("Get Internal Subset", &
pbdom_doc.GetDocType().GetInternalSubset())
```

The returned string from the call to GetInternalSubset is:

```
<!-- internal subset --> <!-- ELEMENT abc (#PCDATA) -->
<!-- ELEMENT data (#PCDATA) --> <!-- ELEMENT inner_data
(#PCDATA) --> <!-- ELEMENT another_data (#PCDATA) -->"
```

The new ELEMENT declaration for “another_data” is included in the final internal subset.

See also [GetInternalSubset](#)

SetName

Description The SetName method sets the name of the root element that is declared by this PBDOM_DOCTYPE.

Syntax *pbdom_doctype_name*.SetName(string *strName*)

Argument	Description
<i>pbdom_doctype_name</i>	The name of a PBDOM_DOCTYPE object
<i>strName</i>	The new name you want to set for the root element that is declared by the current PBDOM_DOCTYPE

Return value Boolean. Returns true if the name of the root element was changed and false otherwise.

SetParentObject

Description The SetParentObject method sets the referenced PBDOM_OBJECT to be the parent of the current PBDOM_OBJECT and so sets the DOCTYPE represented by this PBDOM_DOCTYPE to be the DOCTYPE of the referenced PBDOM_DOCUMENT.

Syntax *pbdom_doctype_name*.SetParentObject(*pbdom_object pbdom_object_ref*)

Argument	Description
<i>pbdom_doctype_name</i>	The name of a PBDOM_DOCTYPE object
<i>pbdom_object_ref</i>	A PBDOM_OBJECT to be set as the parent of the current PBDOM_DOCTYPE

Return value PBDOM_OBJECT.

Throws EXCEPTION_PBDOM_OBJECT_ALREADY_HAS_PARENT – If this PBDOM_DOCTYPE already has a parent.

EXCEPTION_MULTIPLE_DOCTYPE – If the input PBDOM_OBJECT is a PBDOM_DOCUMENT object and already has a doctype.

EXCEPTION_INAPPROPRIATE_USE_OF_PBDOM_OBJECT – If the input PBDOM_OBJECT is not a PBDOM_DOCUMENT.

EXCEPTION_PBDOM_OBJECT_INVALID_FOR_USE – If the input PBDOM_OBJECT is not associated with a derived PBDOM_OBJECT.

Usage This method sets the input PBDOM_OBJECT as the parent of the current PBDOM_OBJECT. The input PBDOM_OBJECT must be a PBDOM_DOCUMENT. If it is not, an exception is thrown.

In PBDOM, calling SetParentObject is equivalent to setting the input PBDOM_DOCUMENT as the owner document and parent node of the current PBDOM_DOCTYPE. This has the effect of setting the DOCTYPE in PBDOM_DOCTYPE as the DOCTYPE of the document.

A DOM DOCTYPE object can have no owner document, or it can have an owner document but no parent node. A DOCTYPE that has an owner document as well as a parent node is the actual DOCTYPE of the owner document.

This method is exactly the same as the SetDocument method.

See also SetDocument

SetPublicID

Description Sets the public ID of an externally referenced DTD.

Syntax *pbdom_doctype_name*.SetPublicID(string *strPublicID*)

Argument	Description
<i>pbdom_doctype_name</i>	The name of a PBDOM_DOCTYPE object
<i>strPublicID</i>	A string that specifies the new public ID

Return value

PBDOM_DOCTYPE.

Examples

Suppose you have the following DTD declaration:

```
<!DOCTYPE abc [<!ELEMENT abc (#PCDATA)> <!ELEMENT data (#PCDATA)> <!ELEMENT inner_data (#PCDATA)>]>
```

The following PowerScript sets the public ID, and then gets it and displays it in a message box:

```
PBDOM_DOCUMENT pbdom_doc

pbdom_doc.GetDocType().SetPublicID &
    ("-//MyCompany//DTD//EN")
MessageBox ("Get Public ID", &
    pbdom_doc.GetDocType().GetPublicID())
```

The returned string from the GetPublicID call is:

```
"-//MyCompany//DTD//EN"
```

The final DOCTYPE definition in the document is:

```
<!DOCTYPE abc PUBLIC "-//MyCompany//DTD//EN"
[<!ELEMENT abc (#PCDATA)> <!ELEMENT data (#PCDATA)>
<!ELEMENT inner_data (#PCDATA)>]>
```

About Public ID
The PUBLIC ID is usually accompanied by a SYSTEM ID, so the DOCTYPE declaration in this example (with a PUBLIC ID but no SYSTEM ID) might be considered invalid by some parsers.

See also

GetPublicID
GetSystemID
SetSystemID

SetSystemID

Description

Sets the system ID of an externally referenced DTD.

Syntax

pbdom_doctype_name.SetSystemID(*strSystemID*)

Argument	Description
<i>pbdom_doctype_name</i>	The name of a PBDOM_DOCTYPE object
<i>strSystemID</i>	A string that specifies the new system ID

Return value

PBDOM_DOCTYPE.

Examples

Suppose you have the following DTD declaration:

```
<!DOCTYPE abc [<!ELEMENT abc (#PCDATA)> <!ELEMENT data
(#PCDATA)> <!ELEMENT inner_data (#PCDATA)>]>
```

The following PowerScript sets the system ID and then gets it and returns it in a message box:

```
PBDOM_DOCUMENT pbdom_doc
pbdom_doc.GetDocType().SetSystemID &
("http://www.sybase.com/dtd/datadef.dtd")
MessageBox ("Get System ID", &
pbdom_doc.GetDocType().GetSystemID())
```

The returned string from the `GetSystemID` call is:

```
"http://www.sybase.com/dtd/datadef.dtd"
```

The final DOCTYPE definition in the document is:

```
<!DOCTYPE abc SYSTEM
"http://www.sybase.com/dtd/datadef.dtd" [<!ELEMENT abc
(#PCDATA)> <!ELEMENT data (#PCDATA)> <!ELEMENT
inner_data (#PCDATA)>]>
```

See also

`GetPublicID`
`GetSystemID`
`SetPublicID`

About this chapter

This chapter describes the PBDOM_DOCUMENT class.

PBDOM_DOCUMENT

Description

The PBDOM_DOCUMENT class defines behavior for an XML DOM document. Methods allow access to the root element, processing instructions, and other document-level information.

The PBDOM_DOCUMENT class inherits from a PBDOM_OBJECT and so provides specialized implementations for most of the PBDOM_OBJECT class methods.

Methods

Some of the inherited methods from PBDOM_OBJECT serve no meaningful objective and only default or trivial functionalities result. These are described in the following table:

Method	Always returns
Detach	The current PBDOM_DOCUMENT
GetName	The string "#document"
GetOwnerDocumentObject	null
GetParentObject	null
GetText	An empty string
GetTextNormalize	An empty string
GetTextTrim	An empty string
SetName	false
SetParentObject	The current PBDOM_DOCUMENT

PBDOM_DOCUMENT has the following non-trivial methods:

- AddContent
- Clone
- DetachRootElement
- Equals
- GetContent

GetDocType
GetObjectClass
GetObjectClassString
GetRootElement
HasChildren
HasRootElement
InsertContent
IsAncestorObjectOf
NewDocument
RemoveContent
SaveDocument
SetContent
SetDocType
SetRootElement

AddContent

Description	Allows you to add a new PBDOM_OBJECT into the current PBDOM_DOCUMENT object.						
Syntax	<i>pbdom_document_name</i> .AddContent(<i>pbdom_object</i> <i>pbdom_object_ref</i>) <table><tr><th>Argument</th><th>Description</th></tr><tr><td><i>pbdom_document_name</i></td><td>The name of a PBDOM_DOCUMENT object</td></tr><tr><td><i>pbdom_object_ref</i></td><td>The PBDOM_OBJECT to add</td></tr></table>	Argument	Description	<i>pbdom_document_name</i>	The name of a PBDOM_DOCUMENT object	<i>pbdom_object_ref</i>	The PBDOM_OBJECT to add
Argument	Description						
<i>pbdom_document_name</i>	The name of a PBDOM_DOCUMENT object						
<i>pbdom_object_ref</i>	The PBDOM_OBJECT to add						
Return value	PBDOM_OBJECT. The return value is the newly modified PBDOM_DOCUMENT object returned as a PBDOM_OBJECT.						
Throws	EXCEPTION_USE_OF_UNNAMED_PBDOM_OBJECT – The input PBDOM_OBJECT is nameable, but it currently has no name. EXCEPTION_PBDOM_OBJECT_INVALID_FOR_USE – The input PBDOM_OBJECT object is not associated with a derived PBDOM_OBJECT class object. EXCEPTION_INAPPROPRIATE_USE_OF_PBDOM_OBJECT – Adding the input PBDOM_OBJECT is inappropriate. See description section below on the valid PBDOM_OBJECTs that can be added to a PBDOM_DOCUMENT object. EXCEPTION_PBDOM_OBJECT_ALREADY_HAS_PARENT – If the PBDOM_OBJECT to be added already has a parent PBDOM_OBJECT.						

EXCEPTION_MULTIPLE_ROOT_ELEMENT – If a PBDOM_ELEMENT is to be added and this document already has a root element.

EXCEPTION_MULTIPLE_DOCTYPE – If a PBDOM_DOCTYPE is to be added and this document already has a DOCTYPE.

Examples

The document pbdom_doc1 is created with three elements: pbdom_elem_1, pbdom_elem_2, and pbdom_elem_3. pbdom_elem_2 and pbdom_elem_3 are set as children of pbdom_element_1.

pbdom_doc1.GetRootElement().Detach() detaches the root element from pbdom_doc1. pbdom_elem_1 is added as a child of pbdom_doc1 with pbdom_doc1.AddContent(pbdom_elem_1).

TRY

```
PBDOM_ELEMENT pbdom_elem_1
PBDOM_ELEMENT pbdom_elem_2
PBDOM_ELEMENT pbdom_elem_3
PBDOM_DOCUMENT pbdom_doc1
```

```
pbdom_doc1 = Create PBDOM_DOCUMENT
pbdom_elem_1 = Create PBDOM_ELEMENT
pbdom_elem_2 = Create PBDOM_ELEMENT
pbdom_elem_3 = Create PBDOM_ELEMENT
```

```
pbdom_elem_1.SetName("pbdom_elem_1")
pbdom_elem_2.SetName("pbdom_elem_2")
pbdom_elem_3.SetName("pbdom_elem_3")
```

```
pbdom_elem_1.AddContent(pbdom_elem_2)
pbdom_elem_1.AddContent(pbdom_elem_3)
```

```
pbdom_doc1.NewDocument("", "", "Root_Element", &
    "", "")
```

```
pbdom_doc1.GetRootElement().Detach()
pbdom_doc1.AddContent(pbdom_elem_1)
```

```
CATCH (pbdom_exception ex)
    MessageBox("Exception", ex.getMessage())
```

END TRY

The original root element <Root_Element> has been detached and replaced by <pbdom_elem_1>. The document is transformed to:

```
<!DOCTYPE Root_Element>
<pbdom_elem_1>
  <pbdom_elem_2/>
  <pbdom_elem_3/>
</pbdom_elem_1>
```

If the following root element detachment statement is omitted, an exception is thrown:

```
pbdom_doc1.GetRootElement().Detach()
```

Usage

The new PBDOM_OBJECT becomes a child PBDOM_OBJECT of the current PBDOM_DOCUMENT. The following table lists the PBDOM_OBJECTs that can be added to a PBDOM_DOCUMENT object and the restrictions for their addition.

PBDOM_OBJECT	Restrictions
PBDOM_ELEMENT	Allowed to be added only if this document currently does not contain any root element. Otherwise the exception EXCEPTION_MULTIPLE_ROOT_ELEMENT is thrown. The PBDOM_ELEMENT to be added must not already have a parent PBDOM_OBJECT. If it does, the exception EXCEPTION_PBDOM_OBJECT_ALREADY_HAS_PARENT is thrown.
PBDOM_COMMENT	Any number of PBDOM_COMMENT objects can be added to a document. The only restriction is that the PBDOM_COMMENT must not already have a parent. If so, the exception EXCEPTION_PBDOM_OBJECT_ALREADY_HAS_PARENT is thrown.
PBDOM_PROCESSINGINSTRUCTION	Any number of PBDOM_PROCESSINGINSTRUCTION objects can be added to a document. The only restriction is that the PBDOM_PROCESSINGINSTRUCTION must not already have a parent. If so, the exception EXCEPTION_PBDOM_OBJECT_ALREADY_HAS_PARENT is thrown.
PBDOM_DOCTYPE	Allowed to be added only if this document currently does not contain any DOCTYPE node. Otherwise the exception EXCEPTION_MULTIPLE_DOCTYPE is thrown. The PBDOM_DOCTYPE to be added must not already have a parent PBDOM_OBJECT. If it does, the exception EXCEPTION_PBDOM_OBJECT_ALREADY_HAS_PARENT is thrown.

See also

- GetContent
- InsertContent
- RemoveContent
- SetContent

Clone

Description Creates a clone of the current PBDOM_DOCUMENT object.

Syntax *pbdom_document_name.Clone*(boolean *bDeep*)

Argument	Description
<i>pbdom_document_name</i>	The name of a PBDOM_DOCUMENT object
<i>bDeep</i>	A boolean specifying whether a deep or shallow clone is returned. Values are true for a deep clone and false for a shallow clone.

Return value PBDOM_OBJECT.

Throws EXCEPTION_PBDOM_OBJECT_INVALID_FOR_USE – The internal implementation of the PBDOM_DOCUMENT object is null. The occurrence of this exception is rare but can happen if severe memory corruption occurs.

Usage If you specify a deep clone, the Clone method creates a deep clone of the current PBDOM_DOCUMENT object as a PBDOM_OBJECT. The method recursively clones the subtree under the PBDOM_DOCUMENT object, where the subtree consists of all legal children of the PBDOM_DOCUMENT object.

If a shallow clone is requested, this method clones only the PBDOM_DOCUMENT object and returns a completely empty PBDOM_DOCUMENT object as a PBDOM_OBJECT.

DetachRootElement

Description Detaches the root element of this document and returns it.

Syntax *pbdom_document_name.DetachRootElement*()

Argument	Description
<i>pbdom_document_name</i>	The name of a PBDOM_DOCUMENT object

Return value PBDOM_ELEMENT.

Throws EXCEPTION_MEMORY_ALLOCATION_FAILURE – Insufficient memory was encountered while executing this method.

See also GetRootElement
 HasRootElement
 SetRootElement

Equals

Description Tests for the equality of the current PBDOM_DOCUMENT object and a referenced PBDOM_OBJECT.

Syntax *pbdom_document_name.Equals(pbdom_object pbdom_object_ref)*

Argument	Description
<i>pbdom_document_name</i>	The name of a PBDOM_OBJECT
<i>pbdom_object_ref</i>	A PBDOM_OBJECT to test for equality with the current PBDOM_OBJECT

Return value Boolean. Returns true if the current PBDOM_DOCUMENT object is equivalent to the input PBDOM_OBJECT, and false otherwise.

Throws EXCEPTION_PBDOM_OBJECT_INVALID_FOR_USE – The input PBDOM_OBJECT is not associated with a derived PBDOM_OBJECT class object.

 EXCEPTION_INVALID_ARGUMENT – The input PBDOM_OBJECT is invalid. This can happen if the object has not been initialized properly or is a null object reference.

Usage True is returned only if the referenced PBDOM_OBJECT is also a PBDOM_DOCUMENT object and refers to the same DOM document as the current PBDOM_DOCUMENT object.

GetContent

Description Returns all child content of the current PBDOM_DOCUMENT object.

Syntax *pbdom_document_name.GetContent(ref pbdom_object pbdom_object_array[])*

Argument	Description
<i>pbdom_document_name</i>	The name of a PBDOM_DOCUMENT object
<i>pbdom_object_array</i>	The referenced name of an array of PBDOM_OBJECTs that receives PBDOM_OBJECTs

Return value	Boolean. Returns true for success and false for failure.
Throws	EXCEPTION_PBDOM_OBJECT_INVALID_FOR_USE – This PBDOM_OBJECT object is not associated with a derived PBDOM_OBJECT class object.
Examples	Assume a PBDOM_DOCUMENT object called pbdom_doc contains the following XML document.

```

<Root>
  <Element_1>
    <Element_1_1/>
    <Element_1_2/>
    <Element_1_3/>
  </Element_1>
  <Element_2/>
  <Element_3/>
</Root>

```

In the following PowerScript code fragment, the array pbdom_obj_array contains just one PBDOM_ELEMENT which represents the element Root: pbdom_obj_array[1] - <Root>:

```

PBDOM_DOCUMENT pbdom_doc
PBDOM_OBJECT pbdom_obj_array[]
...
pbdom_doc.GetContent (pbdom_obj_array)
pbdom_doc.GetRootElement ().GetContent (pbdom_obj_array)

```

The call to GetRootElement in the last line of the previous code fragment yields an array that contains:

```

pbdom_obj_array[1] - <Element_1>
pbdom_obj_array[2] - <Element_2>
pbdom_obj_array[3] - <Element_3>

```

The returned PBDOM_OBJECT array can be manipulated. For example, the following statement causes Element_2 to contain the Text node "Element 2 Text":

```

pbdom_obj_array[2].AddContent ("Element 2 Text")

```

After this call, the tree is as follows:

```
<Root>
  Element_1>
    Element_1_1/>
    Element_1_2/>
    Element_1_3/>
  /Element_1>
  Element_2>Element 2 Text<Element_2/>
  Element_3/>
</Root>
```

Usage The returned array is passed by reference, with items in the same order in which they appear in the PBDOM_DOCUMENT object. Any changes to any item of the array affect the actual item to which it refers.

See also AddContent
InsertContent
RemoveContent
SetContent

GetDocType

Description Allows you to retrieve the DOCTYPE declaration of the current XML DOM document.

Syntax *pbdom_document_name*.GetDocType()

Argument	Description
<i>pbdom_document_name</i>	The name of a PBDOM_DOCUMENT object

Return value PBDOM_DOCTYPE.

Throws EXCEPTION_MEMORY_ALLOCATION_FAILURE – Insufficient memory was encountered while executing this method.

Usage The DOCTYPE declaration is housed in a PBDOM_OBJECT.

GetObjectClass

Description Returns a long integer code that indicates the class of the current PBDOM_OBJECT.

Syntax *pbdom_object_name*.GetObjectClass()

Argument	Description
<i>pbdom_object_name</i>	The name of a PBDOM_OBJECT

Return value Long. `GetObjectClass` returns a long integer code that indicates the class of the current PBDOM_OBJECT. If *pbdom_object_name* is a PBDOM_DOCUMENT object, the returned value is 2.

GetObjectClassString

Description Returns a string form of the class of the PBDOM_OBJECT.

Syntax *pbdom_object_name*.`GetObjectClassString()`

Argument	Description
<i>pbdom_object_name</i>	The name of a PBDOM_OBJECT

Return value String. `GetObjectClassString` returns a string that indicates the class of the current PBDOM_OBJECT. If *pbdom_object_name* is a PBDOM_DOCUMENT object, the returned string is “pbdom_document”.

GetRootElement

Description Retrieves the root element of the current XML DOM document.

Syntax *pbdom_document_name*.`GetRootElement()`

Argument	Description
<i>pbdom_document_name</i>	The name of a PBDOM_DOCUMENT object

Return value PBDOM_ELEMENT. The root element of the PBDOM_DOCUMENT object housed in a PBDOM_ELEMENT object.

Throws EXCEPTION_MEMORY_ALLOCATION_FAILURE – Insufficient memory was encountered while executing this method.

Usage The return value is the root element encapsulated in a PBDOM_ELEMENT object.

See also `DetachRootElement`
`HasRootElement`
`SetRootElement`

HasChildren

Description	Returns true if the current PBDOM_DOCUMENT object has at least one child PBDOM_OBJECT, and false if it has none.				
Syntax	<i>pbdom_document_name</i> .HasChildren() <table><tr><th>Argument</th><th>Description</th></tr><tr><td><i>pbdom_document_name</i></td><td>The name of a PBDOM_DOCUMENT object</td></tr></table>	Argument	Description	<i>pbdom_document_name</i>	The name of a PBDOM_DOCUMENT object
Argument	Description				
<i>pbdom_document_name</i>	The name of a PBDOM_DOCUMENT object				
Return value	Boolean. Returns true if the current PBDOM_DOCUMENT object has at least one child PBDOM_OBJECT, and false otherwise.				

HasRootElement

Description	Returns true if this document has a root element.				
Syntax	<i>pbdom_document_name</i> .HasRootElement() <table><tr><th>Argument</th><th>Description</th></tr><tr><td><i>pbdom_document_name</i></td><td>The name of a PBDOM_DOCUMENT object</td></tr></table>	Argument	Description	<i>pbdom_document_name</i>	The name of a PBDOM_DOCUMENT object
Argument	Description				
<i>pbdom_document_name</i>	The name of a PBDOM_DOCUMENT object				
Return value	Boolean. Returns true if the current PBDOM_DOCUMENT object has a root element, and false otherwise.				
See also	DetachRootElement GetRootElement SetRootElement				

InsertContent

Description	Inserts a new PBDOM_OBJECT into the current PBDOM_DOCUMENT object.								
Syntax	<i>pbdom_document_name</i> .InsertContent(<i>pbdom_object</i> <i>pbdom_object_new</i> , <i>pbdom_object</i> <i>pbdom_object_ref</i>) <table><tr><th>Argument</th><th>Description</th></tr><tr><td><i>pbdom_document_name</i></td><td>The name of a PBDOM_DOCUMENT object</td></tr><tr><td><i>pbdom_object_new</i></td><td>The PBDOM_OBJECT to insert</td></tr><tr><td><i>pbdom_object_ref</i></td><td>The PBDOM_OBJECT in front of which the new PBDOM_OBJECT will be inserted</td></tr></table>	Argument	Description	<i>pbdom_document_name</i>	The name of a PBDOM_DOCUMENT object	<i>pbdom_object_new</i>	The PBDOM_OBJECT to insert	<i>pbdom_object_ref</i>	The PBDOM_OBJECT in front of which the new PBDOM_OBJECT will be inserted
Argument	Description								
<i>pbdom_document_name</i>	The name of a PBDOM_DOCUMENT object								
<i>pbdom_object_new</i>	The PBDOM_OBJECT to insert								
<i>pbdom_object_ref</i>	The PBDOM_OBJECT in front of which the new PBDOM_OBJECT will be inserted								

Return value	PBDOM_OBJECT. The modified PBDOM_DOCUMENT object returned as a PBDOM_OBJECT.
Throws	<p>EXCEPTION_INVALID_ARGUMENT – The input PBDOM_OBJECT to insert is invalid. This can happen if it has not been initialized properly or is a null object reference.</p> <p>EXCEPTION_USE_OF_UNNAMED_PBDOM_OBJECT – The input PBDOM_OBJECT to insert has not been given a user-defined name. The same exception is thrown if the reference PBDOM_OBJECT is also not given a user-defined name, unless the reference PBDOM_OBJECT is specifically set to null.</p> <p>EXCEPTION_PBDOM_OBJECT_INVALID_FOR_USE – The input PBDOM_OBJECT to insert is not associated with a derived PBDOM_OBJECT. The same exception is thrown if the reference PBDOM_OBJECT is also not associated with a derived PBDOM_OBJECT, unless the reference PBDOM_OBJECT is specifically set to null.</p> <p>EXCEPTION_PBDOM_OBJECT_ALREADY_HAS_PARENT – The input PBDOM_OBJECT to insert already as a parent.</p> <p>EXCEPTION_MULTIPLE_ROOT_ELEMENT – A PBDOM_ELEMENT is to be inserted, but this document already has a root element.</p> <p>EXCEPTION_MULTIPLE_DOCTYPE – A PBDOM_DOCTYPE is to be inserted, but this document already has a DOCTYPE.</p> <p>EXCEPTION_HIERARCHY_ERROR – Inserting the PBDOM_OBJECT adversely affects how well-formed the document is.</p> <p>EXCEPTION_INAPPROPRIATE_USE_OF_PBDOM_OBJECT – An invalid PBDOM_OBJECT is to be inserted. See AddContent on page 178 for information on the valid PBDOM_OBJECTs that can be added to a PBDOM_DOCUMENT object.</p> <p>EXCEPTION_WRONG_PARENT_ERROR – The reference PBDOM_OBJECT is not a child of this PBDOM_DOCUMENT object.</p>
Examples	<p>A PBDOM_DOCUMENT object is created from an XML string. The PBDOM_ELEMENT pbdom_elem_1 is also created and set as Elem_1. The PBDOM_DOCTYPE pbdom_doctype_1 and the root element pbdom_root_elem are set.</p> <p>The root element is detached from its parent, which is also the PBDOM_DOCUMENT object itself. This makes it possible to insert pbdom_elem_1 into the document specifically before pbdom_doctype_1.</p> <pre>pbdom_builder pbdom_builder_1</pre>

```
pbdom_document pbdom_doc
pbdom_doctype pbdom_doctype_1
pbdom_element pbdom_elem_1
pbdom_element pbdom_elem_root
string strXML

strXML = "<!DOCTYPE abc [<!-- internal subset -->"
strXML += "<!ELEMENT abc (#PCDATA)> "
strXML += "<!ELEMENT data&(#PCDATA)> "
strXML += "<!ELEMENT inner_data (#PCDATA)>]><abc>"
strXML += "Root Element Data<data>ABC Data<inner_data>"
strXML += "My Inner Data</inner_data>My Data</data>"
strXML += " now with extra& info</abc>"

pbdom_builder_1 = Create PBDOM_Builder
pbdom_elem_1 = Create PBDOM_Element

pbdom_doc = pbdom_builder_1.BuildFromString (strXML)
pbdom_elem_1.SetName ("Elem_1")
pbdom_doctype_1 = pbdom_doc.GetDocType()
pbdom_elem_root = pbdom_doc.GetRootElement()

pbdom_elem_root.Detach()
pbdom_doc.InsertContent(pbdom_elem_1, pbdom_doctype_1
```

The result is the following document, which is not well-formed:

```
<Elem_1/>
<!DOCTYPE abc [<!-- internal subset -->
<!ELEMENT abc (#PCDATA)*> <!ELEMENT data (#PCDATA)*>
<!ELEMENT inner_data (#PCDATA)*>]>
```

Usage

When a new PBDOM_OBJECT is inserted into the current PBDOM_DOCUMENT object, the new PBDOM_OBJECT becomes a child node of the current PBDOM_DOCUMENT object. Also, the new PBDOM_OBJECT is to be positioned specifically before another PBDOM_OBJECT, denoted using the second parameter.

If the second PBDOM_OBJECT is specified as null, then the new PBDOM_OBJECT is to be inserted at the end of the list of children of the current PBDOM_DOCUMENT object.

See also

AddContent
GetContent
RemoveContent
SetContent

IsAncestorObjectOf

Description	The IsAncestorObjectOf method determines whether the current PBDOM_DOCUMENT object is the ancestor of another PBDOM_OBJECT.						
Syntax	<i>pbdom_document_name</i> .IsAncestorObjectOf(<i>pbdom_object</i> <i>pbdom_object_ref</i>)						
	<table> <tr> <th>Argument</th><th>Description</th></tr> <tr> <td><i>pbdom_document_name</i></td><td>The name of a PBDOM_DOCUMENT object</td></tr> <tr> <td><i>pbdom_object_ref</i></td><td>The PBDOM_OBJECT to check against</td></tr> </table>	Argument	Description	<i>pbdom_document_name</i>	The name of a PBDOM_DOCUMENT object	<i>pbdom_object_ref</i>	The PBDOM_OBJECT to check against
Argument	Description						
<i>pbdom_document_name</i>	The name of a PBDOM_DOCUMENT object						
<i>pbdom_object_ref</i>	The PBDOM_OBJECT to check against						
Return value	Boolean. Returns true if the current PBDOM_DOCUMENT object is the ancestor of the referenced PBDOM_OBJECT, and false otherwise.						
Throws	EXCEPTION_INVALID_ARGUMENT – The input PBDOM_OBJECT is invalid. This can happen if it has not been initialized properly or is a null object reference.						

NewDocument

Description	<p>The NewDocument method is overloaded:</p> <ul style="list-style-type: none"> Syntax 1 creates a new XML DOM document using the name of the root element to be contained within the new DOM document. Syntax 2 creates a new XML DOM document using the name and namespace URI of the root element to be contained in the new DOM document, and also the external subset public and system identifiers.
-------------	---

Syntax

For this syntax	See
NewDocument(string <i>strRootElementName</i>)	NewDocument Syntax 1
NewDocument(string <i>strRootElementNamespacePrefix</i> , string <i>strRootElementNamespaceURI</i> , string <i>strRootElementName</i> , string <i>strDocTypePublicId</i> , string <i>strDocTypeSystemId</i>)	NewDocument Syntax 2

NewDocument Syntax 1

Description	Creates a new XML DOM document from scratch.
Syntax	<i>pbdom_document_name</i> .NewDocument(<i>strRootElementName</i>)

Argument	Description
<i>pbdom_document_name</i>	The name of a PBDOM_DOCUMENT object
<i>strRootElementName</i>	The name of the root element to be contained in the DOM document

Return value	Boolean. Returns true if a new document is successfully created and false otherwise.
Throws	EXCEPTION_INVALID_ARGUMENT – The input string is invalid. This can happen if the string has been set to null by means of the PowerScript SetNull method. EXCEPTION_MEMORY_ALLOCATION_FAILURE – Insufficient memory was encountered while executing this method.
Usage	The parameter <i>strRootElementName</i> becomes the name of the root element.
See also	SaveDocument

NewDocument Syntax 2

Description	Creates a new XML DOM document from scratch.
-------------	--

Syntax	<i>pbdom_document_name</i> .NewDocument(string <i>strRootElementNamespacePrefix</i> , string <i>strRootElementNamespaceURI</i> , string <i>strRootElementName</i> , string <i>strDocTypePublicId</i> , string <i>strDocTypeSystemId</i>)
--------	---

Argument	Description
<i>pbdom_document_name</i>	The name of a PBDOM_DOCUMENT object.
<i>strRootElementNamespacePrefix</i>	The namespace prefix of the root element to be contained in the DOM document. This can be an empty string.
<i>strRootElementNamespaceURI</i>	The namespace URI of the root element to be contained in the DOM document. This can be an empty string.
<i>strRootElementName</i>	The name of the root element to be contained in the DOM document.
<i>strDocTypePublicId</i>	The external subset public identifier.
<i>strDocTypeSystemId</i>	The external subset system identifier.

Return value	Boolean. Returns true if a new document is successfully created, and false otherwise.
--------------	---

Throws

EXCEPTION_INVALID_ARGUMENT – One of the input strings is invalid. This can happen if the string has been set to null using the PowerScript SetNull method.

EXCEPTION_MEMORY_ALLOCATION_FAILURE – Insufficient memory was encountered while executing this method.

EXCEPTION_INVALID_NAME – The root element name, or the root element namespace prefix or URI, is invalid.

EXCEPTION_PBDOM_OBJECT_INVALID_FOR_USE – This PBDOM_DOCUMENT object's internal implementation is NULL. The occurrence of this exception is rare but can take place if severe memory corruption occurs.

Examples

Example 1 This example attempts to create a PBDOM_DOCUMENT object in which the root element belongs to no namespace, as indicated by the empty strings for the namespace prefix and URI arguments to NewDocument:

```
PBDOM_DOCUMENT pbdom_doc

try
    pbdom_doc = Create PBDOM_DOCUMENT
    pbdom_doc.NewDocument ("", "", "root", "public_id", &
        "system_id.dtd")

    pbdom_doc.SaveDocument &
        ("new_document_no_namespace.xml")

catch (PBDOM_EXCEPTION except)
    MessageBox ("PBDOM_EXCEPTION", except.GetMessage())
end try
```

When serialized, the XML document looks like the following :

```
<!DOCTYPE root PUBLIC "public_id" "system_id.dtd">
<root xmlns="" />
```

The namespace declaration attribute (xmlns="") present in the root element indicates that the root element belongs to no namespace.

Example 2 This example attempts to create a PBDOM_DOCUMENT object in which the root element belongs to a default namespace. The URI is <http://www.pre.com>, which means that the root element belongs to the namespace <http://www.pre.com>. The prefix is an empty string, which means that the root element belongs to the <http://www.pre.com> namespace by default:

```
PBDOM_DOCUMENT pbdom_doc
```

```
try
    pbdom_doc = Create PBDOM_DOCUMENT
    pbdom_doc.NewDocument ("", "http://www.pre.com", &
        "root", "public_id", "system_id.dtd")

    pbdom_doc.SaveDocument &
        ("new_document_default_namespace.xml")

catch (PBDOM_EXCEPTION except)
    MessageBox ("PBDOM_EXCEPTION", except.GetMessage())
end try
```

When serialized, the XML document looks like the following :

```
<!DOCTYPE root PUBLIC "public_id" "system_id.dtd">
<root xmlns="http://www.pre.com"/>
```

The namespace declaration attribute (xmlns="http://www.pre.com") present in the root element indicates that the root element belongs to the default namespace http://www.pre.com. All child elements of root belong to this same namespace unless another in-scope namespace declaration is present and is used.

Example 3 This example attempts to create a PBDOM_DOCUMENT object in which the root element belong to a prefixed namespace. The namespace prefix is pre and the URI is http://www.pre.com. This means that the root element will belong to the namespace http://www.pre.com, and that the root element will have a namespace prefix of pre:

```
PBDOM_DOCUMENT pbdom_doc

try
    pbdom_doc = Create PBDOM_DOCUMENT
    pbdom_doc.NewDocument ("pre", "http://www.pre.com", &
        "root", "public_id", "system_id.dtd")

    pbdom_doc.SaveDocument &
        ("new_document_namespace.xml")

catch (PBDOM_EXCEPTION except)
    MessageBox ("PBDOM_EXCEPTION", except.GetMessage())
end try
```

When serialized, the XML document looks like the following :

```
<!DOCTYPE pre:root PUBLIC "public_id" "system_id.dtd">
<pre:root xmlns:pre="http://www.pre.com"/>
```


A namespace declaration attribute (`xmlns:pre="http://www.pre.com"`) is present in the root element. The root element also contains a `pre` prefix. This indicates that the root element belongs to the namespace `http://www.pre.com`.

However, the fact that the `http://www.pre.com` namespace is prefixed by `pre` indicates that the child elements of root belong to this same namespace only if their qualified names also contain the `pre` prefix and there is an in-scope namespace declaration for `http://www.pre.com` that is prefixed by `pre`.

Usage	Using the five parameters available with this syntax provides more control over the DOCTYPE definition of the document.
See also	SaveDocument

RemoveContent

Description Removes a child PBDOM_OBJECT from the current PBDOM_DOCUMENT object.

Syntax *pbdom_document_name.RemoveContent(pbdom_object pbdom_object_ref)*

Argument	Description
<i>pbdom_document_name</i>	The name of a PBDOM_DOCUMENT object
<i>pbdom_object_ref</i>	The PBDOM_OBJECT to remove

Return value Boolean. Returns true if the content was removed, and false otherwise.

Throws EXCEPTION_INVALID_ARGUMENT – The input PBDOM_OBJECT to remove is invalid. This can happen if it has not been initialized properly or is a null object reference.

EXCEPTION_USE_OF_UNNAMED_PBDOM_OBJECT – The input PBDOM_OBJECT is nameable, but it has not been assigned a name.

EXCEPTION_PBDOM_OBJECT_INVALID_FOR_USE – The input PBDOM_OBJECT is not associated with a derived PBDOM_OBJECT class object.

EXCEPTION_WRONG_DOCUMENT_ERROR – The input PBDOM_OBJECT is not contained within the current PBDOM_DOCUMENT object.

EXCEPTION_WRONG_PARENT_ERROR – The input PBDOM_OBJECT is not a child of the current PBDOM_DOCUMENT object.

Usage When a PBDOM_OBJECT is removed from the current PBDOM_DOCUMENT object, all children under the removed PBDOM_OBJECT are also removed.

See also AddContent
 GetContent
 InsertContent
 SetContent

SaveDocument

Description Saves the serialized XML string of the DOM tree contained within the PBDOM_DOCUMENT object into a disk file.

Syntax *pbdom_document_name*.SaveDocument(string *strFileName*)

Argument	Description
<i>pbdom_document_name</i>	The name of a PBDOM_DOCUMENT object
<i>strFileName</i>	The name of the disk file to which the contents of the current PBDOM_DOCUMENT object is to be serialized

Return value Boolean. Returns true if a new document was successfully saved to a disk file, and false otherwise.

Throws EXCEPTION_INVALID_ARGUMENT – The input string specifying the file name is invalid. This can happen if the string has been set to null using the PowerScript SetNull method.

EXCEPTION_MEMORY_ALLOCATION_FAILURE – Insufficient memory was encountered while executing this method.

Usage A PBDOM_DOCUMENT object that has been created from an existing XML document or string can differ from its original after it has been converted back to an XML string or document. This can occur even if no modifications have been made to the PBDOM_DOCUMENT object using PowerScript.

This can occur if the original XML document or string referred to an external DTD that mandates the inclusion of default attributes. In this case, PBDOM complies with the rules of the DTD and inserts these required attributes into the relevant elements while building up the in-memory DOM tree.

When the PBDOM_DOCUMENT object is saved and converted back to an XML document, these default attributes are saved in the document.

See also NewDocument

SetContent

Description Sets the entire content of the PBDOM_DOCUMENT object, removing pre-existing children first.

Syntax *pbdom_document_name*.SetContent(*pbdom_object pbdom_object_array*)

Argument	Description
<i>pbdom_document_name</i>	The name of a PBDOM_DOCUMENT object
<i>pbdom_object_array</i>	An array of PBDOM_OBJECTs set as the contents of the PBDOM_DOCUMENT object

pbdom_object_array must contain only PBDOM_OBJECT objects that can legally be set as the contents of a PBDOM_DOCUMENT object. The SetContent method restricts the array to one PBDOM_ELEMENT object to set as the root element of the PBDOM_DOCUMENT object from which the method is invoked. The SetContent method also restricts the array to one PBDOM_DOCTYPE object to set as the DOCTYPE of the PBDOM_DOCUMENT object.

Return value PBDOM_OBJECT. The modified PBDOM_DOCUMENT object returned as a PBDOM_OBJECT.

Throws EXCEPTION_ILLEGAL_PBOBJECT – An array item is not a valid PBDOM object. This can happen if the array item has not been initialized properly or is a null object reference.

EXCEPTION_USE_OF_UNNAMED_PBDOM_OBJECT – An array item is nameable and has not been given a user-defined name.

EXCEPTION_PBDOM_OBJECT_INVALID_FOR_USE – An array item is not associated with a derived PBDOM_OBJECT.

EXCEPTION_PBDOM_OBJECT_ALREADY_HAS_PARENT – An array item already has a parent PBDOM_OBJECT.

EXCEPTION_MULTIPLE_ROOT_ELEMENT – The array contains more than one PBDOM_ELEMENT. The array must contain at most one PBDOM_ELEMENT that is set as the root element of this document.

EXCEPTION_MULTIPLE_DOCTYPE – The array contains more than one PBDOM_DOCTYPE. The array must contain at most one PBDOM_DOCTYPE that is set as the DOCTYPE of this document.

EXCEPTION_MULTIPLE_XMLDECL – The array contains more than one PBDOM_PROCESSINGINSTRUCTION that has been constructed into an XML Declaration.

	<p>EXCEPTION_INAPPROPRIATE_USE_OF_PBDOM_OBJECT – An array item is not allowed to be set as a document-level content.</p>
Usage	<p>The supplied array contains PBDOM_OBJECTs that can legally be set as the content of a PBDOM_DOCUMENT object.</p> <p>For example, a PBDOM_DOCUMENT object accepts only an array that contains PBDOM_ELEMENT, PBDOM_COMMENT, PBDOM_DOCTYPE, or PBDOM_PROCESSINGINSTRUCTION objects. In addition, the array can contain at most one PBDOM_ELEMENT object that it sets as its root element, at most one PBDOM_DOCTYPE object that it sets as its DOCTYPE, and at most one XML declaration .PBDOM_PROCESSINGINSTRUCTION.</p> <p>In the event of an exception, the original contents of this PBDOM_DOCUMENT object are unchanged, and the PBDOM_OBJECTs contained in the supplied array are unaltered.</p>
See also	<p>AddContent GetContent InsertContent RemoveContent</p>

SetDocType

Description	<p>Sets the DOCTYPE declaration of this document.</p>						
Syntax	<p><i>pbdom_document_name</i>.SetDocType(<i>pbdom_doctype</i> <i>pbdom_doctype_ref</i>)</p> <table><tr><th>Argument</th><th>Description</th></tr><tr><td><i>pbdom_document_name</i></td><td>The name of a PBDOM_DOCUMENT object</td></tr><tr><td><i>pbdom_doctype_ref</i></td><td>A PBDOM_DOCTYPE object to be set as the DOCTYPE of this document</td></tr></table>	Argument	Description	<i>pbdom_document_name</i>	The name of a PBDOM_DOCUMENT object	<i>pbdom_doctype_ref</i>	A PBDOM_DOCTYPE object to be set as the DOCTYPE of this document
Argument	Description						
<i>pbdom_document_name</i>	The name of a PBDOM_DOCUMENT object						
<i>pbdom_doctype_ref</i>	A PBDOM_DOCTYPE object to be set as the DOCTYPE of this document						
Return value	<p>PBDOM_DOCUMENT. The same PBDOM_DOCUMENT object with a modified DOCTYPE declaration.</p>						
Throws	<p>EXCEPTION_INVALID_ARGUMENT – The input PBDOM_DOCTYPE is invalid. This can happen if it has not been initialized properly or is a null object reference.</p> <p>EXCEPTION_USE_OF_UNNAMED_PBDOM_OBJECT – The input PBDOM_DOCTYPE is nameable and has not been given a user-defined name.</p> <p>EXCEPTION_WRONG_DOCUMENT_ERROR – The input PBDOM_DOCTYPE already has an owner document.</p>						

EXCEPTION_PBDOM_OBJECT_ALREADY_HAS_PARENT – The input PBDOM_DOCTYPE is already the DOCTYPE of another document.

Usage

If this document already contains a DOCTYPE declaration, the new PBDOM_DOCTYPE replaces it. The DOCTYPE of a PBDOM_DOCUMENT object can be changed multiple times, and it is legal for a user to call the SetDocType method multiple times.

A DOM DOCTYPE object can have no owner document, or it can have an owner document but no parent node. A DOCTYPE that has an owner document as well as a parent node is the actual DOCTYPE of the owner document.

SetRootElement

Description

Sets the root element for this document.

Syntax

pbdom_document_name.SetRootElement(*pbdom_element*
pbdom_element_ref)

Argument	Description
<i>pbdom_document_name</i>	The name of a PBDOM_DOCUMENT object
<i>pbdom_element_ref</i>	A PBDOM_ELEMENT object to be set as the root element for this document

Return value

PBDOM_DOCUMENT. The PBDOM_DOCUMENT object with a modified root element.

Throws

EXCEPTION_INVALID_ARGUMENT – The input PBDOM_ELEMENT is invalid. This can happen if it has not been initialized properly or is a null object reference.

EXCEPTION_USE_OF_UNNAMED_PBDOM_OBJECT – The input PBDOM_ELEMENT is nameable and it has not been given a user-defined name.

EXCEPTION_PBDOM_OBJECT_ALREADY_HAS_PARENT – The input PBDOM_ELEMENT already has a parent PBDOM_OBJECT.

Usage

If this document already has a root element, the existing root element is replaced. The root element of a PBDOM_DOCUMENT object can be changed multiple times, and it is legal for a user to call the SetRootElement method multiple times.

See also

DetachRootElement
GetRootElement
HasRootElement

About this chapter

This chapter describes the PBDOM_ELEMENT class.

PBDOM_ELEMENT

Description

The PBDOM_ELEMENT class defines the behavior for an XML element modeled in PowerScript. Methods allow the user to obtain the text content of an element, the attributes of an element, and the children of an element.

In PBDOM, an XML element's attributes are *not* its children. Attributes are properties of elements rather than having a separate identity from the elements with which they are associated. An element's PBDOM_ATTRIBUTE objects do not have sibling relationships with each other in the same way as the element's children.

For more information on the relationships among PBDOM_ELEMENT and PBDOM_ATTRIBUTE objects, see the chapter on XML services in *Application Techniques*.

Methods

PBDOM_ELEMENT has the following methods:

- AddContent
- AddNamespaceDeclaration
- Clone
- Detach
- Equals
- GetAttribute
- GetAttributes
- GetAttributeValue
- GetChildElement
- GetChildElements
- GetContent
- GetName
- GetNamespacePrefix
- GetNamespaceUri
- GetObjectClass

GetObjectClassString
GetOwnerDocumentObject
GetParentObject
GetQualifiedName
GetText
GetTextNormalize
GetTextTrim
HasAttributes
HasChildElements
HasChildren
InsertContent
IsAncestorObjectOf
IsRootElement
RemoveAttribute
RemoveChildElement
RemoveChildElements
RemoveContent
RemoveNamespaceDeclaration
SetAttribute
SetAttributes
SetContent
SetDocument
SetName
SetNamespace
SetParentObject
SetText

AddContent

Description

The AddContent method is overloaded:

- Syntax 1 adds a new PBDOM_OBJECT into a PBDOM_ELEMENT object.
- Syntax 2 adds a new text string to the PBDOM_ELEMENT object from which the method is invoked.

Syntax

For this syntax	See
AddContent(pbdom_object <i>pbdom_object_ref</i>)	AddContent Syntax 1
AddContent(string <i>strText</i>)	AddContent Syntax 2

AddContent Syntax 1

Description Adds a new PBDOM_OBJECT into a PBDOM_ELEMENT object. The added PBDOM_OBJECT becomes a child of the PBDOM_ELEMENT object.

Syntax *pbdom_element_name*.AddContent(*pbdom_object pbdom_object_ref*)

Argument	Description
<i>pbdom_element_name</i>	The name of a PBDOM_ELEMENT object
<i>pbdom_object_ref</i>	The PBDOM_OBJECT to add

Return value PBDOM_OBJECT. The PBDOM_ELEMENT object modified and returned as a PBDOM_OBJECT.

Throws EXCEPTION_INAPPROPRIATE_USE_OF_PBDOM_OBJECT – If an invalid PBDOM_OBJECT is added. See description section below on the valid PBDOM_OBJECTs that can be added to a PBDOM_ELEMENT object. This exception is also thrown if the input PBDOM_OBJECT is this PBDOM_ELEMENT object itself.

EXCEPTION_USE_OF_UNNAMED_PBDOM_OBJECT – If the input PBDOM_OBJECT has not been given a user-defined name.

EXCEPTION_PBDOM_OBJECT_INVALID_FOR_USE – If the input PBDOM_OBJECT is not associated with a derived PBDOM_OBJECT.

EXCEPTION_PBDOM_OBJECT_ALREADY_HAS_PARENT – If the input PBDOM_OBJECT already has a parent PBDOM_OBJECT.

EXCEPTION_HIERARCHY_ERROR – If adding the input PBDOM_OBJECT will cause the current PBDOM_ELEMENT object to be no longer well-formed.

Examples The AddContent method is invoked for the Element_2 PBDOM_ELEMENT object in the following XML fragment:

```
<Element_1>
    <Element_1_1/>
    <Element_1_2/>
    <Element_1_3/>
</Element_1>
<Element_2>Element 2 Text</Element_2>
<Element_3/>
```

The AddContent is invoked from the following PowerScript code, where pbdom_elem_2 represents the Element_2 object:

```
PBDOM_ELEMENT pbdom_elem
pbdom_elem = Create PBDOM_ELEMENT
pbdom_elem.SetName("Sub_Element")
pbdom_elem.AddContent("Sub Element Text")
pbdom_elem_2.AddContent (pbdom_elem)
```

The following XML fragment results:

```
<Element_1>
  <Element_1_1/>
  <Element_1_2/>
  <Element_1_3/>
</Element_1>
<Element_2>
  Element 2 Text
  <Sub_Element>
    Sub Element Text
  </Sub_Element>
<Element_2/>
<Element_3/>
```

Usage

Only the following PBDOM_OBJECT types can be validly added to a PBDOM_ELEMENT object:

- PBDOM_ELEMENT
- PBDOM_CDATA
- PBDOM_COMMENT
- PBDOM_ENTITYREFERENCE
- PBDOM_PROCESSINGINSTRUCTION
- PBDOM_TEXT

See also

AddContent Syntax 2
GetContent
InsertContent
RemoveContent
SetContent

AddContent Syntax 2

Description Adds a new text string to the PBDOM_ELEMENT object from which the method is invoked.

Syntax *pbdom_element_name*.AddContent(string *strText*)

Argument	Description
<i>pbdom_element_name</i>	The name of a PBDOM_ELEMENT object
<i>strText</i>	A string to be added to the PBDOM_ELEMENT object as new text content

Return value PBDOM_OBJECT. The PBDOM_ELEMENT object modified and returned as a PBDOM_OBJECT.

Examples The AddContent method is invoked for the abc element of the following XML document:

```
<abc>
    Root Element Data
    <data>
        ABC Data
        <inner_data>My Inner Data</inner_data>
    </data>
</abc>
```

The AddContent method is invoked from the following PowerScript statement:

```
pbdom_doc.GetRootElement().AddContent(" And More !")
```

The following XML results:

```
<abc>
    Root Element Data
    <data>
        ABC Data
        <inner_data>My Inner Data</inner_data>
    </data>
    And More !
</abc>
```

See also AddContent Syntax 1
GetContent
InsertContent
RemoveContent
SetContent

AddNamespaceDeclaration

Description Adds a new namespace declaration to this PBDOM_ELEMENT object. The new namespace can apply to the PBDOM_ELEMENT object itself if the namespace becomes the default namespace in the PBDOM_ELEMENT object.

Syntax `pbdom_element_name.AddNamespaceDeclaration(string strNamespacePrefix, string strNamespaceUri)`

Argument	Description
<code>pbdom_element_name</code>	The name of a PBDOM_ELEMENT object
<code>strNamespacePrefix</code>	The prefix of the new namespace to be declared
<code>strNamespaceUri</code>	The URI of the new namespace to be declared

Return value PBDOM_ELEMENT. The modified PBDOM_ELEMENT object.

Throws EXCEPTION_INVALID_ARGUMENT – If any of the input parameters is invalid (null).

EXCEPTION_INVALID_NAME – If the input Prefix is invalid, as, for example, if it contains a colon.

EXCEPTION_INVALID_STRING – If the input URI is invalid.

EXCEPTION_MEMORY_ALLOCATION_FAILURE – If memory allocation failure occurred in this method.

Examples Consider the following element:

```
<Vehicle>
  <seats>4</seats>
  <color>Red</color>
  <engine>
    <capacity units="cc">1600</capacity>
  </engine>
</Vehicle>
```

Given a PBDOM_ELEMENT object `elem_vehicle` that represents the Vehicle element, consider the following statement:

```
elem_vehicle.AddNamespaceDeclaration("vehicle_specs", &
    "http://www.vehicle.com/specs")
```

It transforms the Vehicle element as follows:

```
<Vehicle
xmlns:vehicle_specs="http://www.vehicle.com/specs">
  <seats>4</seats>
  <color>Red</color>
```

```

    <engine>
      <capacity units="cc">1600</capacity>
    </engine>
  </Vehicle>

```

Vehicle, seats, color, engine, and capacity are all unqualified (that is, they have no namespace prefix). Therefore, the `vehicle_specs` namespace does not apply to any of them or their attributes or subelements.

However, consider the following statement:

```

elem_vehicle.AddNamespaceDeclaration("", &
    "http://www.vehicle.com/specs")

```

It transforms the `Vehicle` element as follows:

```

<Vehicle xmlns:"http://www.vehicle.com/specs">
  <seats>4</seats>
  <color>Red</color>
  <engine>
    <capacity units="cc">1600</capacity>
  </engine>
</Vehicle>

```

`http://www.vehicle.com/specs` is the default namespace and so `Vehicle`, `seats`, `color`, `engine`, and `capacity` are all part of this namespace. Note that the default namespace does *not* apply to the `units` attribute.

See also

[GetNamespacePrefix](#)
[GetNamespaceUri](#)
[GetQualifiedName](#)
[RemoveNamespaceDeclaration](#)
[SetNamespace](#)

Clone

Description

Creates a clone of a `PBDOM_ELEMENT` object.

Syntax

`pbdom_element_name.Clone(boolean bDeep)`

Argument	Description
<code>pbdom_element_name</code>	The name of a <code>PBDOM_ELEMENT</code> object.
<code>bDeep</code>	A boolean specifying whether a deep or shallow clone is returned. Values are <code>true</code> for a deep clone and <code>false</code> for a shallow clone.

Return value PBDOM_OBJECT. A clone of this PBDOM_ELEMENT object returned as a PBDOM_OBJECT.

Examples The Clone method is used to alter the following XML:

```
<Telephone_Book>
  <Entry>
    <Particulars>
      <Name>John Doe</Name>
      <Age>21</Age>
      <Phone_Number>1234567</Phone_Number>
    </Particulars>
  </Entry>
</Telephone_Book>
```

The Clone method is invoked from the following PowerScript code, where entry represents the Entry> element in the preceding XML:

```
PBDOM_ELEMENT elem_clone

elem_clone = entry.Clone(true)
pbdom_doc.AddContent(elem_clone)
```

The resulting XML contains two identical Entry> elements:

```
<Telephone_Book>
  <Entry>
    <Particulars>
      <Name>John Doe</Name>
      <Age>21</Age>
      <Phone_Number>1234567</Phone_Number>
    </Particulars>
  </Entry>
  <Entry>
    <Particulars>
      <Name>John Doe</Name>
      <Age>21</Age>
      <Phone_Number>1234567</Phone_Number>
    </Particulars>
  </Entry>
</Telephone_Book>
```

Usage This method creates and returns a duplicate of the current PBDOM_ELEMENT object. If a shallow clone is requested, this method clones the PBDOM_ELEMENT object together with its namespace information values and its PBDOM_ATTRIBUTES and their subtrees. If a deep clone is requested, this method additionally recursively clones the subtree under the PBDOM_ELEMENT object.

A PBDOM_ELEMENT clone has no parent. However, the clone resides in the same PBDOM_DOCUMENT as its original, and if the original PBDOM_ELEMENT object is standalone, the clone is standalone.

Detach

Description	Detaches a PBDOM_ELEMENT object from its parent PBDOM_OBJECT.				
Syntax	<i>pbdom_element_name</i> .Detach()				
	<table> <tr> <th>Argument</th><th>Description</th></tr> <tr> <td><i>pbdom_element_name</i></td><td>The name of a PBDOM_ELEMENT object</td></tr> </table>	Argument	Description	<i>pbdom_element_name</i>	The name of a PBDOM_ELEMENT object
Argument	Description				
<i>pbdom_element_name</i>	The name of a PBDOM_ELEMENT object				
Return value	PBDOM_OBJECT. The PBDOM_ELEMENT object detached from its parent object and returned as a PBDOM_OBJECT. If the PBDOM_ELEMENT object has no parent, the Detach method does nothing.				

Equals

Description	Tests for equality between the PBDOM_ELEMENT object from which the method is invoked and a PBDOM_OBJECT indicated by the method parameter.						
Syntax	<i>pbdom_element_name</i> .Equals(<i>pbdom_object pbdom_object_ref</i>)						
	<table> <tr> <th>Argument</th><th>Description</th></tr> <tr> <td><i>pbdom_element_name</i></td><td>The name of a PBDOM_ELEMENT object</td></tr> <tr> <td><i>pbdom_object_ref</i></td><td>A PBDOM_OBJECT to be tested for equality with this PBDOM_ELEMENT object</td></tr> </table>	Argument	Description	<i>pbdom_element_name</i>	The name of a PBDOM_ELEMENT object	<i>pbdom_object_ref</i>	A PBDOM_OBJECT to be tested for equality with this PBDOM_ELEMENT object
Argument	Description						
<i>pbdom_element_name</i>	The name of a PBDOM_ELEMENT object						
<i>pbdom_object_ref</i>	A PBDOM_OBJECT to be tested for equality with this PBDOM_ELEMENT object						
Return value	Boolean. Returns true if the PBDOM_ELEMENT object is equivalent to the referenced PBDOM_OBJECT and false otherwise.						
Examples	<p>The Equals method is invoked from the following PowerScript code, in which <i>pbdom_doc</i> represents a PBDOM_DOCUMENT object containing a root element:</p> <pre> PBDOM_ELEMENT pbdom_elem_1 PBDOM_ELEMENT pbdom_elem_2 PBDOM_OBJECT pbdom_obj PBDOM_DOCUMENT pbdom_doc pbdom_elem_1 = pbdom_doc.GetRootElement() pbdom_elem_2 = pbdom_doc.GetRootElement() </pre>						

```
IF pbdom_elem_1.Equals(pbdom_elem_2) THEN
    MessageBox ("Equals", "The objects are equal")
ELSE
    MessageBox ("Equals", "The objects are NOT equal")
END IF

pbdom_obj  = Create PBDOM_ELEMENT
pbdom_obj.SetName("An_Element")

IF pbdom_elem_1.Equals(pbdom_obj) THEN
    MessageBox ("Equals", "The objects are equal")
ELSE
    MessageBox ("Equals", "The objects are NOT equal")
END IF
```

Because pbdom_elem_1 and pbdom_elem_2 refer to the same root element, a message box reports that the objects are equal.

GetAttribute

Description

The GetAttribute method is overloaded:

- Syntax 1 returns the PBDOM_ATTRIBUTE object for a PBDOM_ELEMENT object using the name of the PBDOM_ATTRIBUTE.
- Syntax 2 returns the PBDOM_ATTRIBUTE object for a PBDOM_ELEMENT object with the name provided and within the namespace specified by the prefix and URI provided.

Syntax

For this syntax	See
GetAttribute(string <i>strName</i>)	GetAttribute Syntax 1
GetAttribute(string <i>strName</i> , string <i>strNamespacePrefix</i> , string <i>strNamespaceUri</i>)	GetAttribute Syntax 2

GetAttribute Syntax 1

Description Returns the PBDOM_ATTRIBUTE object for a PBDOM_ELEMENT object.

Syntax *pbdom_element_name*.GetAttribute(string *strName*)

Argument	Description
<i>pbdom_element_name</i>	The name of a PBDOM_ELEMENT object
<i>strName</i>	The name of the PBDOM_ATTRIBUTE to be returned

Return value PBDOM_ATTRIBUTE. The PBDOM_ATTRIBUTE object matching the name specified in the method parameter. If no such PBDOM_ATTRIBUTE object exists, the GetAttribute method returns a value of null.

Throws EXCEPTION_INVALID_NAME – If the supplied name is a qualified name that contains a namespace prefix.

Examples The GetAttribute method is invoked for the following XML document:

```
<MyMusic:abc
xmlns:MyMusic="http://www.MyMusic_records.com"
My_Attr="My MyMusic Attribute">Root Element
Data</MyMusic:abc>
```

The GetAttribute method is invoked from the following PowerShell statement:

```
pbdom_attr = &
    pbdom_doc.GetRootElement().GetAttribute("My_Attr")
```

The GetAttribute method returns the PBDOM_ATTRIBUTE object My_Attr.

Usage If the PBDOM_ATTRIBUTE name specified in the method parameter is a qualified name, an exception is thrown. A qualified name appears in the following form: [*namespace_prefix*]:[*local_name*].

See also GetAttribute Syntax 2
GetAttributes
GetAttributeValue
HasAttributes
SetAttribute
SetAttributes

GetAttribute Syntax 2

Description	Returns the PBDOM_ATTRIBUTE object for a PBDOM_ELEMENT object with the name provided and within the namespace specified by the prefix and URI provided.										
Syntax	<div><i>pbdom_element_name</i>.GetAttribute(string <i>strName</i>, string <i>strNamespacePrefix</i>, string <i>strNamespaceUri</i>)</div> <table><tr><th>Argument</th><th>Description</th></tr><tr><td><i>pbdom_element_name</i></td><td>The name of a PBDOM_ELEMENT object</td></tr><tr><td><i>strName</i></td><td>The name of the PBDOM_ATTRIBUTE to be returned</td></tr><tr><td><i>strNamespacePrefix</i></td><td>The prefix of the namespace of the PBDOM_ATTRIBUTE to return</td></tr><tr><td><i>strNamespaceUri</i></td><td>The URI of the namespace of the PBDOM_ATTRIBUTE to return</td></tr></table>	Argument	Description	<i>pbdom_element_name</i>	The name of a PBDOM_ELEMENT object	<i>strName</i>	The name of the PBDOM_ATTRIBUTE to be returned	<i>strNamespacePrefix</i>	The prefix of the namespace of the PBDOM_ATTRIBUTE to return	<i>strNamespaceUri</i>	The URI of the namespace of the PBDOM_ATTRIBUTE to return
Argument	Description										
<i>pbdom_element_name</i>	The name of a PBDOM_ELEMENT object										
<i>strName</i>	The name of the PBDOM_ATTRIBUTE to be returned										
<i>strNamespacePrefix</i>	The prefix of the namespace of the PBDOM_ATTRIBUTE to return										
<i>strNamespaceUri</i>	The URI of the namespace of the PBDOM_ATTRIBUTE to return										
Return value	PBDOM_ATTRIBUTE. The PBDOM_ATTRIBUTE object matching the name, namespace prefix, and URI specified in the method parameters. If no such PBDOM_ATTRIBUTE object exists, the GetAttribute method returns a value of null.										
Throws	<p>EXCEPTION_INVALID_ARGUMENT – If any of the arguments is invalid, for example, null.</p> <p>EXCEPTION_MEMORY_ALLOCATION_FAILURE – If there was any memory allocation failure during the running of this method.</p>										
See also	GetAttribute Syntax 1 GetAttributes GetAttributeValue HasAttributes SetAttribute SetAttributes										

GetAttributes

Description	Returns the complete set of PBDOM_ATTRIBUTE objects for a PBDOM_ELEMENT object. If there are no PBDOM_ATTRIBUTE objects for the PBDOM_ELEMENT object, the GetAttributes method returns an empty array.
Syntax	<i>pbdom_element_name</i> .GetAttributes(ref <i>pbdom_attribute pbdom_attribute_array</i>)

	Argument	Description
	<i>pbdom_element_name</i>	The name of a PBDOM_ELEMENT object
	<i>pbdom_attribute_array</i>	An empty and unbounded array to be filled with references to the PBDOM_ATTRIBUTE objects contained in the PBDOM_ELEMENT object
Return value		Boolean. Returns true if an array of PBDOM_ATTRIBUTE objects for the PBDOM_ELEMENT object has been retrieved, and false otherwise.
Usage		GetAttributes returns the complete set of PBDOM_ATTRIBUTE objects for a PBDOM_ELEMENT object as an array of PBDOM_ATTRIBUTE objects, or as an empty list (empty array) if there are none. The returned array items are “live” and changes to any item affect the referenced PBDOM_ATTRIBUTE.
See also		GetAttribute GetAttributeValue HasAttributes SetAttribute SetAttributes

GetAttributeValue

Description	<p>The GetAttributeValue method is overloaded:</p> <ul style="list-style-type: none"> • Syntax 1 returns the string value of a PBDOM_ATTRIBUTE object with the specified name. • Syntax 2 returns the string value of a PBDOM_ATTRIBUTE object with the specified name, using the prefix and URI of the namespace of the PBDOM_ATTRIBUTE. • Syntax 3 returns the string value of a PBDOM_ATTRIBUTE object with the specified name, using the prefix and URI of the namespace of the PBDOM_ATTRIBUTE. Syntax 3 also provides a default string value to return if the attribute does not exist. • Syntax 4 returns the string value of a PBDOM_ATTRIBUTE object with the specified name. Syntax 4 also provides a default string value to return if the attribute does not exist.
-------------	---

Syntax

For this syntax	See
GetAttributeValue(string <i>strAttributeName</i>)	GetAttributeValue Syntax 1
GetAttributeValue(string <i>strAttributeName</i> , string <i>strNamespacePrefix</i> , string <i>strNamespaceUri</i>)	GetAttributeValue Syntax 2
GetAttributeValue(string <i>strAttributeName</i> , string <i>strNamespacePrefix</i> , string <i>strNamespaceUri</i> , string <i>strDefaultValue</i>)	GetAttributeValue Syntax 3
GetAttributeValue(string <i>strAttributeName</i> , string <i>strDefaultValue</i>)	GetAttributeValue Syntax 4

GetAttributeValue Syntax 1

Description	Returns the string value of the PBDOM_ATTRIBUTE object (within a PBDOM_ELEMENT object) with the specified name and within no namespace.						
Syntax	<i>pbdom_element_name</i> .GetAttributeValue(string <i>strAttributeName</i>) <table><tr><th>Argument</th><th>Description</th></tr><tr><td><i>pbdom_element_name</i></td><td>The name of a PBDOM_ELEMENT object</td></tr><tr><td><i>strAttributeName</i></td><td>The name of the attribute whose value is to be returned</td></tr></table>	Argument	Description	<i>pbdom_element_name</i>	The name of a PBDOM_ELEMENT object	<i>strAttributeName</i>	The name of the attribute whose value is to be returned
Argument	Description						
<i>pbdom_element_name</i>	The name of a PBDOM_ELEMENT object						
<i>strAttributeName</i>	The name of the attribute whose value is to be returned						
Return value	String. The string value of the PBDOM_ATTRIBUTE object specified in <i>strAttributeName</i> . If no such object exists, the GetAttributeValue method returns null.						
Usage	If the text value of the PBDOM_ATTRIBUTE object is empty, the GetAttributeValue method returns an empty string.						
See also	GetAttribute GetAttributeValue Syntax 2 GetAttributeValue Syntax 3 GetAttributeValue Syntax 4 HasAttributes SetAttribute SetAttributes						

GetAttributeValue Syntax 2

Description Returns the string value of the PBDOM_ATTRIBUTE object (within a PBDOM_ELEMENT object) with the specified name and within the specified namespace.

Syntax *pbdom_element_name*.GetAttributeValue(string *strAttributeName*, string *strNamespacePrefix*, string *strNamespaceUri*)

Argument	Description
<i>pbdom_element_name</i>	The name of a PBDOM_ELEMENT object
<i>strAttributeName</i>	The name of the attribute whose value is to be returned
<i>strNamespacePrefix</i>	The prefix of the namespace of the PBDOM_ATTRIBUTE whose value is to be returned
<i>strNamespaceUri</i>	The URI of the namespace of the PBDOM_ATTRIBUTE whose value is to be returned

Return value String. The string value of the PBDOM_ATTRIBUTE object specified in *strAttributeName*. If no such object exists, the GetAttributeValue method returns an empty string.

Throws EXCEPTION_INVALID_ARGUMENT – If any of the input arguments is invalid, for example, null.

EXCEPTION_MEMORY_ALLOCATION_FAILURE – If there was any memory allocation failure during the execution of this method.

EXCEPTION_INVALID_NAME – If the input attribute name or namespace prefix or namespace URI is invalid.

See also GetAttribute
GetAttributeValue Syntax 1
GetAttributeValue Syntax 3
GetAttributeValue Syntax 4
HasAttributes
SetAttribute
SetAttributes

GetAttributeValue Syntax 3

Description Returns the string value of the PBDOM_ATTRIBUTE object (within a PBDOM_ELEMENT object) with the specified name and within the specified namespace. If no such PBDOM_ATTRIBUTE exists, the default value is returned.

Syntax *pbdom_element_name*.GetAttributeValue(string *strAttributeName*, string *strNamespacePrefix*, string *strNamespaceUri*, string *strDefaultValue*)

Argument	Description
<i>pbdom_element_name</i>	The name of a PBDOM_ELEMENT object
<i>strAttributeName</i>	The name of the attribute whose value is to be returned
<i>strNamespacePrefix</i>	The prefix of the namespace of the PBDOM_ATTRIBUTE whose value is to be returned
<i>strNamespaceUri</i>	The URI of the namespace of the PBDOM_ATTRIBUTE whose value is to be returned
<i>strDefaultValue</i>	Default string value to return if the attribute does not exist

Return value String. The string value of the PBDOM_ATTRIBUTE object specified in *strAttributeName*. If no such object exists, the GetAttributeValue method returns the string provided in *strDefaultValue*.

Throws EXCEPTION_INVALID_ARGUMENT – If any of the input arguments is invalid, for example, null.

EXCEPTION_MEMORY_ALLOCATION_FAILURE – If there was any memory allocation failure during the execution of this method.

EXCEPTION_INVALID_NAME – If the input attribute name or namespace prefix or namespace URI is invalid.

See also GetAttribute
GetAttributeValue Syntax 1
GetAttributeValue Syntax 2
GetAttributeValue Syntax 4
HasAttributes
SetAttribute
SetAttributes

GetAttributeValue Syntax 4

Description	Returns the string value of the PBDOM_ATTRIBUTE object (within a PBDOM_ELEMENT object) with the specified name. If no such PBDOM_ATTRIBUTE exists, the default value is returned.								
Syntax	<i>pbdom_element_name</i> .GetAttributeValue(string <i>strAttributeName</i> , string <i>strDefaultValue</i>)								
	<table> <tr> <th>Argument</th><th>Description</th></tr> <tr> <td><i>pbdom_element_name</i></td><td>The name of a PBDOM_ELEMENT object</td></tr> <tr> <td><i>strAttributeName</i></td><td>The name of the attribute whose value is to be returned</td></tr> <tr> <td><i>strDefaultValue</i></td><td>Default string value to return if the attribute does not exist</td></tr> </table>	Argument	Description	<i>pbdom_element_name</i>	The name of a PBDOM_ELEMENT object	<i>strAttributeName</i>	The name of the attribute whose value is to be returned	<i>strDefaultValue</i>	Default string value to return if the attribute does not exist
Argument	Description								
<i>pbdom_element_name</i>	The name of a PBDOM_ELEMENT object								
<i>strAttributeName</i>	The name of the attribute whose value is to be returned								
<i>strDefaultValue</i>	Default string value to return if the attribute does not exist								
Return value	String. The string value of the PBDOM_ATTRIBUTE object specified in <i>strAttributeName</i> . If no such object exists, the GetAttributeValue method returns the string provided in <i>strDefaultValue</i> .								
See also	GetAttribute GetAttributeValue Syntax 1 GetAttributeValue Syntax 2 GetAttributeValue Syntax 3 HasAttributes SetAttribute SetAttributes								

GetChildElement

Description	<p>The GetChildElement method is overloaded:</p> <ul style="list-style-type: none"> Syntax 1 returns the first child PBDOM_ELEMENT object that matches the name indicated by the method parameter. Syntax 2 returns the first child PBDOM_ELEMENT object that matches the name and namespace indicated by the method parameter. 						
Syntax	<table> <tr> <th>For this syntax</th><th>See</th></tr> <tr> <td>GetChildElement(string <i>strElementName</i>)</td><td>GetChildElement Syntax 1</td></tr> <tr> <td>GetChildElement(string <i>strElementName</i>, string <i>strNamespacePrefix</i>, string <i>strNamespaceUri</i>)</td><td>GetChildElement Syntax 2</td></tr> </table>	For this syntax	See	GetChildElement(string <i>strElementName</i>)	GetChildElement Syntax 1	GetChildElement(string <i>strElementName</i> , string <i>strNamespacePrefix</i> , string <i>strNamespaceUri</i>)	GetChildElement Syntax 2
For this syntax	See						
GetChildElement(string <i>strElementName</i>)	GetChildElement Syntax 1						
GetChildElement(string <i>strElementName</i> , string <i>strNamespacePrefix</i> , string <i>strNamespaceUri</i>)	GetChildElement Syntax 2						

GetChildElement Syntax 1

Description	Returns the first child PBDOM_ELEMENT object, matching the name indicated by the method parameter that is contained in the PBDOM_ELEMENT object from which the method is invoked.						
Syntax	<i>pbdom_element_name</i> .GetChildElement(string <i>strElementName</i>) <table><tr><th>Argument</th><th>Description</th></tr><tr><td><i>pbdom_element_name</i></td><td>The name of a PBDOM_ELEMENT object</td></tr><tr><td><i>strElementName</i></td><td>The local name of the child PBDOM_ELEMENT object to be returned</td></tr></table>	Argument	Description	<i>pbdom_element_name</i>	The name of a PBDOM_ELEMENT object	<i>strElementName</i>	The local name of the child PBDOM_ELEMENT object to be returned
Argument	Description						
<i>pbdom_element_name</i>	The name of a PBDOM_ELEMENT object						
<i>strElementName</i>	The local name of the child PBDOM_ELEMENT object to be returned						
Return value	PBDOM_ELEMENT. The first child PBDOM_ELEMENT object whose name matches the value of the method parameter. If no PBDOM_ELEMENT object exists for the specified name, the GetChildElement method returns a value of null.						
See also	GetChildElement Syntax 2 GetChildElements HasChildElements HasChildren IsRootElement RemoveChildElement RemoveChildElements						

GetChildElement Syntax 2

Description	Returns the first child PBDOM_ELEMENT object, matching the name and namespace indicated by the method parameter contained in the PBDOM_ELEMENT object from which the method is invoked.										
Syntax	<i>pbdom_element_name</i> .GetChildElement(string <i>strElementName</i> , string <i>strNamespacePrefix</i> , string <i>strNamespaceUri</i>) <table><tr><th>Argument</th><th>Description</th></tr><tr><td><i>pbdom_element_name</i></td><td>The name of a PBDOM_ELEMENT object</td></tr><tr><td><i>strElementName</i></td><td>The local name of the child PBDOM_ELEMENT object to be returned</td></tr><tr><td><i>strNamespacePrefix</i></td><td>The prefix of the namespace of the child PBDOM_ELEMENT object to be returned</td></tr><tr><td><i>strNamespaceUri</i></td><td>The URI of the namespace of the child PBDOM_ELEMENT object to be returned</td></tr></table>	Argument	Description	<i>pbdom_element_name</i>	The name of a PBDOM_ELEMENT object	<i>strElementName</i>	The local name of the child PBDOM_ELEMENT object to be returned	<i>strNamespacePrefix</i>	The prefix of the namespace of the child PBDOM_ELEMENT object to be returned	<i>strNamespaceUri</i>	The URI of the namespace of the child PBDOM_ELEMENT object to be returned
Argument	Description										
<i>pbdom_element_name</i>	The name of a PBDOM_ELEMENT object										
<i>strElementName</i>	The local name of the child PBDOM_ELEMENT object to be returned										
<i>strNamespacePrefix</i>	The prefix of the namespace of the child PBDOM_ELEMENT object to be returned										
<i>strNamespaceUri</i>	The URI of the namespace of the child PBDOM_ELEMENT object to be returned										

Return value	PBDOM_ELEMENT. The first child PBDOM_ELEMENT object whose name and namespace information match the values of the method parameters. If no PBDOM_ELEMENT object exists for the specified name and namespace information, the GetChildElement method returns a value of null.
Throws	EXCEPTION_INVALID_ARGUMENT – If any of the input arguments is invalid, for example, null. EXCEPTION_INVALID_NAME – If the input Element Name or input namespace prefix or namespace URI is invalid.
See also	GetChildElement Syntax 1 GetChildElements HasChildElements HasChildren IsRootElement RemoveChildElement RemoveChildElements

GetChildElements

Description	<p>The GetChildElements method is overloaded:</p> <ul style="list-style-type: none"> Syntax 1 retrieves a list of all child PBDOM_ELEMENT objects nested one level deep within a PBDOM_ELEMENT object. The list is stored in the array specified when the method is invoked. Syntax 2 retrieves a list of all child PBDOM_ELEMENT objects nested one level deep within a PBDOM_ELEMENT object specified by the name provided and belonging to no namespace. The list is stored in the array specified when the method is invoked. Syntax 3 retrieves a list of all child PBDOM_ELEMENT objects nested one level deep within a PBDOM_ELEMENT object specified by the local name and namespace provided.
-------------	---

Syntax

For this syntax	See
GetChildElements(ref pbdom_element pbdom_element_array[])	GetChildElements Syntax 1
GetChildElements(string strElementName, ref pbdom_element pbdom_element_array[])	GetChildElements Syntax 2
GetChildElements(string strElementName, string strNamespacePrefix, string strNamespaceUri, ref pbdom_element pbdom_element_array[])	GetChildElements Syntax 3

Return value	Boolean. Returns true if child PBDOM_ELEMENT objects have been collected, and false otherwise.
Usage	If the PBDOM_ELEMENT object has no nested elements, GetChildElements returns an empty array.
See also	GetChildElement GetChildElements Syntax 1 GetChildElements Syntax 3 HasChildElements HasChildren IsRootElement RemoveChildElement RemoveChildElements

GetChildElements Syntax 3

Description	Retrieves a list of all child PBDOM_ELEMENT objects nested one level deep within a PBDOM_ELEMENT object specified by the local name and namespace provided.
-------------	---

Syntax	<i>pbdom_element_name</i> .GetChildElements(string <i>strElementName</i> , string <i>strNamespacePrefix</i> , string <i>strNamespaceUri</i> , ref pbdom_element <i>pbdom_element_array</i> [])
--------	--

Argument	Description
<i>pbdom_element_name</i>	The name of a PBDOM_ELEMENT object
<i>strElementName</i>	The name of a PBDOM_ELEMENT object for which to find children
<i>strNamespacePrefix</i>	The prefix of the namespace of the child PBDOM_ELEMENT objects to match
<i>strNamespaceUri</i>	The URI of the namespace of the child PBDOM_ELEMENT objects to match
<i>pbdom_element_array</i> []	The array that stores the child PBDOM_ELEMENT objects

Return value	Boolean. Returns true if child PBDOM_ELEMENT objects have been collected, and false otherwise.
Throws	EXCEPTION_INVALID_ARGUMENT – If any of the parameters is invalid. EXCEPTION_INVALID_NAME – If the input element name or namespace prefix or namespace URI is invalid. The only exception is if the input element name is an empty string.

Usage	<p>If the PBDOM_ELEMENT object has no nested elements, GetChildElements returns an empty array.</p> <p>If the value of <i>strElementName</i> is an empty string, then all child elements match.</p>
See also	<p>GetChildElement</p> <p>GetChildElements Syntax 1</p> <p>GetChildElements Syntax 2</p> <p>HasChildElements</p> <p>HasChildren</p> <p>IsRootElement</p> <p>RemoveChildElement</p> <p>RemoveChildElements</p>

GetContent

Description	<p>Obtains an array of PBDOM_OBJECT objects, each of which is a child node of the PBDOM_ELEMENT object from which the method is invoked. The returned array is “live” in that changes to any item of the array affect the actual item to which the array refers.</p>						
Syntax	<p><i>pbdom_element_name</i>.GetContent(ref pbdom_object <i>pbdom_object_array</i>[])</p> <table><tr><th>Argument</th><th>Description</th></tr><tr><td><i>pbdom_element_name</i></td><td>The name of a PBDOM_ELEMENT object</td></tr><tr><td><i>pbdom_object_array</i></td><td>The name of an array of PBDOM_OBJECT objects that receive references to the PBDOM_OBJECT objects contained within the PBDOM_ELEMENT object</td></tr></table>	Argument	Description	<i>pbdom_element_name</i>	The name of a PBDOM_ELEMENT object	<i>pbdom_object_array</i>	The name of an array of PBDOM_OBJECT objects that receive references to the PBDOM_OBJECT objects contained within the PBDOM_ELEMENT object
Argument	Description						
<i>pbdom_element_name</i>	The name of a PBDOM_ELEMENT object						
<i>pbdom_object_array</i>	The name of an array of PBDOM_OBJECT objects that receive references to the PBDOM_OBJECT objects contained within the PBDOM_ELEMENT object						
Return value	<p>Boolean. Returns true for success and false otherwise.</p>						
Throws	<p>EXCEPTION_INVALID_ARGUMENT – If the input array is null.</p>						
Examples	<p>The GetContent method is invoked for the Root> PBDOM_ELEMENT object in the following XML DOM document:</p>						

```
<Root>
  <Element_1>
    <Element_1_1/>
    <Element_1_2/>
    <Element_1_3/>
  </Element_1>
  <Element_2/>
  <Element_3/>
</Root>
```

The `GetContent` method is invoked from the following PowerShell code:

```
PBDOM_DOCUMENT pbdom_doc
PBDOM_ELEMENT pbdom_elem_root
PBDOM_OBJECT pbdom_obj_array[]

pbdom_elem_root = pbdom_doc.GetRootElement()
pbdom_elem_root.GetContent(pbdom_obj_array)
```

If the `GetContent` method returns the value `true`, the `PBDOM_OBJECT` object `pbdom_obj_array` then contains the following content:

Array element	Value
1	<Element_1>
2	<Element_2>
3	<Element_3>

See also

AddContent Syntax 1

AddContent Syntax 2

InsertContent

RemoveContent

SetContent

GetName

Description

Retrieves the local name of a `PBDOM_ELEMENT` object.

Syntax

pbdom_element_name.GetName()

Argument	Description
<i>pbdom_element_name</i>	The name of a <code>PBDOM_ELEMENT</code> object

Return value

String. The name of the element as it appears in the XML document but without any namespace prefix.

Examples

The `GetName` method returns the string `abc` when it is invoked for the name of the following element:

```
<ns:abc>My Element</ns:abc>
```

Usage

For an XML element that appears in the form `[namespace_prefix]:[element_name]`, the local element name is `element_name`. When the XML element has no namespace prefix, the local name is simply the element name.

Use the GetQualifiedName method to obtain the fully qualified name of an element (with the namespace prefix).

See also GetNamespacePrefix
 GetNamespaceUri
 RemoveNamespaceDeclaration
 SetName

GetNamespacePrefix

Description Returns the namespace prefix for a PBDOM_ELEMENT object. If no namespace prefix exists for the PBDOM_ELEMENT object, GetNamespacePrefix returns an empty string.

Syntax *pbdom_element_name*.GetNamespacePrefix()

Argument	Description
<i>pbdom_element_name</i>	The name of a PBDOM_ELEMENT object

Return value String. The namespace prefix for the PBDOM_ELEMENT object.

See also AddNamespaceDeclaration
 GetNamespaceUri
 GetQualifiedName
 RemoveNamespaceDeclaration
 SetNamespace

GetNamespaceUri

Description Returns the URI that is mapped to a PBDOM_ELEMENT object prefix or, if there is no prefix, to the PBDOM_ELEMENT object default namespace. If no URI is mapped to the PBDOM_ELEMENT object, GetNameSpaceUri returns an empty string.

Syntax *pbdom_element_name*.GetNamespaceUri()

Argument	Description
<i>pbdom_element_name</i>	The name of a PBDOM_ELEMENT object

Return value String. The namespace URI for the PBDOM_ELEMENT object.

See also AddNamespaceDeclaration
 GetNamespacePrefix
 GetQualifiedName

RemoveNamespaceDeclaration
SetNamespace

GetObjectClass

Description	Returns a long integer code that indicates the class of the current PBDOM_OBJECT.				
Syntax	<i>pbdom_object_name</i> .GetObjectClass()				
	<table> <tr> <th>Argument</th><th>Description</th></tr> <tr> <td><i>pbdom_object_name</i></td><td>The name of a PBDOM_OBJECT object</td></tr> </table>	Argument	Description	<i>pbdom_object_name</i>	The name of a PBDOM_OBJECT object
Argument	Description				
<i>pbdom_object_name</i>	The name of a PBDOM_OBJECT object				
Return value	Long. A code that indicates the class of the current PBDOM_OBJECT. If <i>pbdom_object_name</i> is a PBDOM_ELEMENT object, the returned value is 3.				
Examples	<p>The GetObjectClass method returns a value specific to the class of the object from which the method is invoked.</p> <pre>PBDOM_OBJECT pbdom_obj pbdom_obj = Create PBDOM_ELEMENT MessageBox ("Class", & string(pbdom_obj.GetObjectClass()))</pre> <p>This example illustrates polymorphism: <i>pbdom_obj</i> is declared as PBDOM_OBJECT but instantiated as PBDOM_ELEMENT. A message box returns the result of the GetObjectClass method invoked for PBDOM_ELEMENT object. Here the result is 3, indicating that <i>pbdom_obj</i> is a PBDOM_ELEMENT object.</p>				
Usage	This method can be used for diagnostic purposes to dynamically determine the type of a PBDOM_OBJECT at runtime.				

GetObjectClassString

Description	Returns a string form of the class of the PBDOM_OBJECT.				
Syntax	<i>pbdom_object_name</i> .GetObjectClassString()				
	<table> <tr> <th>Argument</th><th>Description</th></tr> <tr> <td><i>pbdom_object_name</i></td><td>The name of your PBDOM_OBJECT object</td></tr> </table>	Argument	Description	<i>pbdom_object_name</i>	The name of your PBDOM_OBJECT object
Argument	Description				
<i>pbdom_object_name</i>	The name of your PBDOM_OBJECT object				

Return value	String. A string that indicates the class of the current PBDOM_OBJECT. If <i>pbdom_object_name</i> is a PBDOM_ELEMENT object, the returned string is “pbdom_element”.
Examples	<p>The GetObjectClass method returns a string specific to the class of the object from which the method is invoked.</p> <pre>PBDOM_OBJECT pbdom_obj pbdom_obj = Create PBDOM_ELEMENT MessageBox ("Class", pbdom_obj.GetObjectClassString())</pre> <p>This example illustrates polymorphism: pbdom_obj is declared as PBDOM_OBJECT but instantiated as PBDOM_ELEMENT object. A message box returns the result of the GetObjectClassString method invoked for PBDOM_ELEMENT object. Here the result is pbdom_element, indicating that pbdom_obj is a PBDOM_ELEMENT object.</p>
Usage	This method can be used for diagnostic purposes to dynamically determine the actual type of a PBDOM_OBJECT at runtime.

GetOwnerDocumentObject

Description	Returns the PBDOM_DOCUMENT object that owns the PBDOM_ELEMENT object.				
Syntax	<p><i>pbdom_element_name</i>.GetOwnerDocumentObject()</p> <table><tr><th>Argument</th><th>Description</th></tr><tr><td><i>pbdom_element_name</i></td><td>The name of a PBDOM_ELEMENT object</td></tr></table>	Argument	Description	<i>pbdom_element_name</i>	The name of a PBDOM_ELEMENT object
Argument	Description				
<i>pbdom_element_name</i>	The name of a PBDOM_ELEMENT object				
Return value	PBDOM_DOCUMENT. The PBDOM_DOCUMENT that owns the PBDOM_ELEMENT object from which the GetOwnerDocumentObject method is invoked. A return value of null indicates that the PBDOM_ELEMENT object is not owned by any PBDOM_DOCUMENT.				
Examples	<p>The GetOwnerDocumentObject method is invoked from the following PowerShell code, where pbdom_root_elem refers to the root element of the PBDOM_DOCUMENT object pbdom_doc:</p> <pre>PBDOM_DOCUMENT pbdom_doc PBDOM_ELEMENT pbdom_root_elem pbdom_root_elem = pbdom_doc.GetRootElement()</pre>				


```

IF
    pbdom_doc.Equals &
        (pbdom_root_elem.GetOwnerDocumentObject())
THEN
    MessageBox ("Equals", "The objects are equal")
END IF

```

The Equals method tests for equality between pbdom_doc and the PBDOM_DOCUMENT object returned from the GetOwnerDocumentObject method. A message box reports that the objects are equal.

See also GetParentObject
 SetParentObject

GetParentObject

Description Returns the parent object for the PBDOM_ELEMENT object.

Syntax *pbdom_element_name*.GetParentObject()

Argument	Description
<i>pbdom_element_name</i>	The name of a PBDOM_ELEMENT object

Return value PBDOM_OBJECT. The parent object of the PBDOM_ELEMENT object from which the GetParentObject method is invoked. A return value of null indicates the PBDOM_ELEMENT object has no parent.

See also GetOwnerDocumentObject
 SetParentObject

GetQualifiedName

Description Returns the full name of a PBDOM_ELEMENT object in the form [*namespace_prefix*]:[*local_name*]. If there is no namespace prefix for the PBDOM_ELEMENT object, the GetQualifiedName method returns the local name.

Syntax *pbdom_element_name*.GetQualifiedName()

Argument	Description
<i>pbdom_element_name</i>	The name of a PBDOM_ELEMENT object

Return value String. The full name of the PBDOM_ELEMENT object. The full name consists of both a namespace prefix and a local name.

See also

- AddNamespaceDeclaration
- GetNamespacePrefix
- GetNamespaceUri
- RemoveNamespaceDeclaration
- SetNamespace

GetText

Description

Obtains a concatenation of the text values of all the PBDOM_TEXT and PBDOM_CDATA nodes contained within the PBDOM_ELEMENT object from which the method is invoked.

Syntax

pbdom_element_name.GetText()

Argument	Description
<i>pbdom_element_name</i>	The name of a PBDOM_ELEMENT object

Return value

String

Examples

The GetText method is invoked for the abc PBDOM_ELEMENT object:

```
<abc>Root Element Data<data>ABC Data </data> now with  
extra info</abc>
```

The GetText method returns the following string:

```
Root Element Data now with extra info
```

The text “ABC Data” is excluded because it is not contained within the PBDOM_ELEMENT abc.

See also

- GetTextNormalize
- GetTextTrim
- SetText

GetTextNormalize

Description

Returns the normalized text data contained in a PBDOM_ELEMENT object.

Syntax

pbdom_element_name.GetTextNormalize()

Argument	Description
<i>pbdom_element_name</i>	The name of a PBDOM_ELEMENT object

Return value

String

Examples The `GetTextNormalize` method is invoked for the `abc` element of the following XML:

```
<abc>      Root      Element      Data      <data>ABC
Data </data> now with extra info      </abc>
```

The `GetTextNormalize` method returns the following string:

```
Root Element Data now with extra info
```

Usage The text data returned includes any text data contained in `PBDOM_CDATA` objects. All surrounding whitespace characters are removed. Internal whitespace characters are normalized to a single space. The `GetTextNormalize` method returns an empty string if no text values exist for the `PBDOM_ELEMENT` object or if there are only whitespace characters.

See also `GetText`
`GetTextTrim`
`SetText`

GetTextTrim

Description Returns the text data contained within a `PBDOM_ELEMENT` object with any leading and trailing whitespace characters removed.

Syntax `pbdom_element_name.GetTextTrim()`

Argument	Description
<code>pbdom_element_name</code>	The name of a <code>PBDOM_ELEMENT</code> object

Return value String

Examples The `GetTextTrim` method is invoked for the `abc` element of the following XML:

```
<abc>      Root      Element Data <![CDATA[
with      some cdata text  ]]></abc>
```

The `GetTextTrim` method returns the following string:

```
Root Element Data with some cdata text
```

Usage Surrounding whitespace characters are removed from the returned text data. The `GetTextTrim` method returns an empty string if no text value exists for the `PBDOM_ELEMENT` object or if the text value contains only whitespace characters.

See also `GetText`
`GetTextNormalize`
`SetText`

HasAttributes

Description	Indicates whether a PBDOM_ELEMENT object has one or more attributes.				
Syntax	<i>pbdom_element_name</i> .HasAttributes() <table><tr><th>Argument</th><th>Description</th></tr><tr><td><i>pbdom_element_name</i></td><td>The name of a PBDOM_ELEMENT object</td></tr></table>	Argument	Description	<i>pbdom_element_name</i>	The name of a PBDOM_ELEMENT object
Argument	Description				
<i>pbdom_element_name</i>	The name of a PBDOM_ELEMENT object				
Return value	Boolean. Returns true if this PBDOM_ELEMENT object has at least one attribute and false if this PBDOM_ELEMENT object has no attributes.				
Examples	<p>In the following document fragment, only the element site has an attribute (href):</p> <pre><books> <title>Inside Wizardry</title> <author>Ron Potter</author> <site href="http://www.mybooks.com/press"/> </books></pre> <p>If the PBDOM_ELEMENT object pbdom_elem_site represents the element site, the following call returns true:</p> <pre>pbdom_elem_site.HasAttributes()</pre>				
See also	GetAttribute GetAttributes GetAttributeValue SetAttribute SetAttributes				

HasChildElements

Description	Indicates whether a PBDOM_ELEMENT object has one or more child PBDOM_ELEMENT objects.				
Syntax	<i>pbdom_element_name</i> .HasChildElements() <table><tr><th>Argument</th><th>Description</th></tr><tr><td><i>pbdom_element_name</i></td><td>The name of a PBDOM_ELEMENT object</td></tr></table>	Argument	Description	<i>pbdom_element_name</i>	The name of a PBDOM_ELEMENT object
Argument	Description				
<i>pbdom_element_name</i>	The name of a PBDOM_ELEMENT object				
Return value	Boolean. Returns true if this PBDOM_ELEMENT object has at least one child PBDOM_ELEMENT object and false if this PBDOM_ELEMENT object has no child PBDOM_ELEMENT objects.				

Examples The HasChildElements method is invoked for the books PBDOM_ELEMENT object in the following XML fragment:

```
<books>
  <title>Inside OLE</title>
  <author>Kraig Brockschmidt</author>
  <site href="http://www.microsoft.com/press"/>
</books>
```

The books object has three child PBDOM_ELEMENT objects: title, author, and site. The HasChildElements method returns true.

See also GetChildElement
GetChildElements
HasChildren
IsRootElement
RemoveChildElement
RemoveChildElements

HasChildren

Description Indicates whether a PBDOM_ELEMENT object has one or more child objects.

Syntax *pbdom_element_name*.HasChildren()

Argument	Description
<i>pbdom_element_name</i>	The name of a PBDOM_ELEMENT object

Return value Boolean. Returns true if this PBDOM_ELEMENT object has at least one child object and false if this PBDOM_ELEMENT object has no child objects.

Examples The HasChildren method is invoked for elements in the following XML fragment:

```
<books>
  <title>Inside OLE</title>
  <author>Kraig Brockschmidt</author>
  <site href="http://www.microsoft.com/press"/>
</books>
```

The books element has three child elements: title, author, and site. The title and author elements each have a child PBDOM_TEXT object. The HasChildren method returns a value of true when invoked for these elements.

In contrast, the site element has a PBDOM_ATTRIBUTE href, which is not considered a child PBDOM_OBJECT. The HasChildren method returns a value of False when invoked for the site element.

Usage	<p>PBDOM's implementation of the HasChildren method differs from JDOM's implementation in that the JDOM HasChildren method returns true only if an Element contains child Elements. Text and other types of objects do not count.</p> <p>PBDOM provides an alternative method, HasChildElements, to specifically detect whether a PBDOM_ELEMENT object has at least one child PBDOM_ELEMENT object.</p>
See also	<p>HasChildElements</p> <p>IsRootElement</p>

InsertContent

Description	<p>Inserts a new PBDOM_OBJECT into a PBDOM_ELEMENT object.</p>								
Syntax	<p><i>pbdom_element_name</i>.InsertContent(<i>pbdom_object pbdom_object_new</i>, <i>pbdom_object pbdom_object_ref</i>)</p> <table><tr><th>Argument</th><th>Description</th></tr><tr><td><i>pbdom_element_name</i></td><td>The name of a PBDOM_ELEMENT object</td></tr><tr><td><i>pbdom_object_new</i></td><td>The PBDOM_OBJECT to insert</td></tr><tr><td><i>pbdom_object_ref</i></td><td>A positional reference PBDOM_OBJECT in front of which the new PBDOM_OBJECT is to be inserted</td></tr></table>	Argument	Description	<i>pbdom_element_name</i>	The name of a PBDOM_ELEMENT object	<i>pbdom_object_new</i>	The PBDOM_OBJECT to insert	<i>pbdom_object_ref</i>	A positional reference PBDOM_OBJECT in front of which the new PBDOM_OBJECT is to be inserted
Argument	Description								
<i>pbdom_element_name</i>	The name of a PBDOM_ELEMENT object								
<i>pbdom_object_new</i>	The PBDOM_OBJECT to insert								
<i>pbdom_object_ref</i>	A positional reference PBDOM_OBJECT in front of which the new PBDOM_OBJECT is to be inserted								
Return value	<p>PBDOM_OBJECT. The PBDOM_ELEMENT object modified and returned as a PBDOM_OBJECT.</p>								
Throws	<p>EXCEPTION_INAPPROPRIATE_USE_OF_PBDOM_OBJECT – If an invalid PBDOM_OBJECT is added. See AddContent on page 200 for the valid PBDOM_OBJECT objects that can be added to a PBDOM_ELEMENT object. This exception is also thrown if the input PBDOM_OBJECT or the reference PBDOM_OBJECT is this PBDOM_ELEMENT object itself.</p> <p>EXCEPTION_USE_OF_UNNAMED_PBDOM_OBJECT – If the input PBDOM_OBJECT to insert has not been given a user-defined name. The same exception is also thrown if the reference PBDOM_OBJECT is also not given a user-defined name, unless the reference PBDOM_OBJECT is specifically set to null.</p> <p>EXCEPTION_PBDOM_OBJECT_INVALID_FOR_USE – If the input PBDOM_OBJECT to insert is not associated with a derived PBDOM_OBJECT. The same exception is also thrown if the reference PBDOM_OBJECT is also not associated with a derived PBDOM_OBJECT unless the reference PBDOM_OBJECT is specifically set to null.</p>								

EXCEPTION_INVALID_ARGUMENT – If the reference **PBDOM_OBJECT** (second parameter) is intended to be null but is not specifically set to null using the **SetNull** method.

EXCEPTION_PBDOM_OBJECT_ALREADY_HAS_PARENT – If the input **PBDOM_OBJECT** to insert already has a parent.

EXCEPTION_WRONG_PARENT_ERROR – If the reference **PBDOM_OBJECT** is not a child of this **PBDOM_ELEMENT** object.

EXCEPTION_HIERARCHY_ERROR – If inserting the input **PBDOM_OBJECT** will cause the current **PBDOM_ELEMENT** object to be no longer well formed.

Examples

The following PowerScript code is used to create an XML document:

```
pbdom_doc1 = Create PBDOM_DOCUMENT
pbdom_elem_1 = Create PBDOM_ELEMENT
pbdom_elem_2 = Create PBDOM_ELEMENT
pbdom_elem_3 = Create PBDOM_ELEMENT

pbdom_elem_1.SetName ("pbdom_elem_1")
pbdom_elem_2.SetName ("pbdom_elem_2")
pbdom_elem_3.SetName ("pbdom_elem_3")

pbdom_doc1.NewDocument ("", "", "Root_Element", "", "")
pbdom_elem_root = pbdom_doc1.GetRootElement()
pbdom_elem_root.AddContent (pbdom_elem_1)
pbdom_elem_root.AddContent (pbdom_elem_3)
```

The following XML results:

```
!DOCTYPE Root_Element>
<Root_Element>
  <pbdom_elem_1 />
  <pbdom_elem_3 />
</Root_Element>
```

The **InsertContent** method is used to add an element between **pbdom_elem_1** and **pbdom_elem_3**:

```
pbdom_elem_root.InsertContent (pbdom_elem_2, &
pbdom_elem_3)
```

The following XML results:

```
<!DOCTYPE Root_Element>
<Root_Element>
  <pbdom_elem_1 />
  <pbdom_elem_2 />
```

```
<pbdom_elem_3 />
</Root_Element>
```

- Usage
- The inserted object becomes a child of the PBDOM_ELEMENT object. The new PBDOM_OBJECT is positioned before another PBDOM_OBJECT, which is specified in the second of two parameters.
- See also
- AddContent Syntax 1
AddContent Syntax 2
GetContent
RemoveContent
SetContent

IsAncestorObjectOf

- Description
- Determines whether a PBDOM_ELEMENT object is the ancestor of the PBDOM_OBJECT indicated by the method parameter.
- Syntax
- pbdom_element_name*.IsAncestorObjectOf(*pbdom_object*
pbdom_object_ref)

Argument	Description
<i>pbdom_element_name</i>	The name of a PBDOM_ELEMENT object
<i>pbdom_object_ref</i>	The PBDOM_OBJECT to be tested for equality with this PBDOM_ELEMENT object
- Return value
- Boolean. Returns true if this PBDOM_ELEMENT object is the ancestor of the specified PBDOM_OBJECT, and false otherwise.

IsRootElement

- Description
- Indicates whether a PBDOM_ELEMENT object is the root element of a PBDOM_DOCUMENT object.
- Syntax
- pbdom_element_name*.IsRootElement()

Argument	Description
<i>pbdom_element_name</i>	The name of a PBDOM_ELEMENT object
- Return value
- Boolean. Returns true if this PBDOM_ELEMENT object is the root element of a PBDOM_DOCUMENT, and false otherwise.
- See also
- GetChildElement
GetChildElements

HasChildElements
 HasChildren
 RemoveChildElement
 RemoveChildElements

RemoveAttribute

Description

The RemoveAttribute method is overloaded:

- Syntax 1 removes a PBDOM_ATTRIBUTE from its owner PBDOM_ELEMENT object using a reference to the PBDOM_ATTRIBUTE.
- Syntax 2 removes a PBDOM_ATTRIBUTE from its owner PBDOM_ELEMENT object using the name of the PBDOM_ATTRIBUTE.
- Syntax 3 removes a PBDOM_ATTRIBUTE from its owner PBDOM_ELEMENT object using the name and namespace of the PBDOM_ATTRIBUTE.

Syntax

For this syntax	See
RemoveAttribute(<i>pbdom_attribute</i> <i>pbdom_attribute_ref</i>)	RemoveAttribute Syntax 1
RemoveAttribute(string <i>strAttributeName</i>)	RemoveAttribute Syntax 2
RemoveAttribute(string <i>strAttributeName</i> , string <i>strNamespacePrefix</i> , string <i>strNamespaceUri</i>)	RemoveAttribute Syntax 3

RemoveAttribute Syntax 1

Description

Removes a PBDOM_ATTRIBUTE from its owner PBDOM_ELEMENT object.

Syntax

pbdom_element_name.RemoveAttribute(*pbdom_attribute*
pbdom_attribute_ref)

Argument	Description
<i>pbdom_element_name</i>	The name of a PBDOM_ELEMENT object
<i>pbdom_attribute_ref</i>	The PBDOM_ATTRIBUTE object to remove from this PBDOM_ELEMENT object

Return value Boolean. Returns true if the specified PBDOM_ATTRIBUTE was removed, and false otherwise.

RemoveAttribute Syntax 2

Description Removes a PBDOM_ATTRIBUTE specified by the name provided that is not contained in a namespace. If no such PBDOM_ATTRIBUTE exists, RemoveAttribute does nothing.

Syntax *pbdom_element_name*.RemoveAttribute(string *strAttributeName*)

Argument	Description
<i>pbdom_element_name</i>	The name of a PBDOM_ELEMENT object
<i>strAttributeName</i>	The name of the PBDOM_ATTRIBUTE object to remove

Return value Boolean. Returns true if the specified PBDOM_ATTRIBUTE was removed, and false otherwise.

RemoveAttribute Syntax 3

Description Removes a PBDOM_ATTRIBUTE specified by the name and namespace provided. If no such PBDOM_ATTRIBUTE exists, RemoveAttribute does nothing.

Syntax *pbdom_element_name*.RemoveAttribute(string *strAttributeName*, string *strNamespacePrefix*, string *strNamespaceUri*)

Argument	Description
<i>pbdom_element_name</i>	The name of a PBDOM_ELEMENT object
<i>strAttributeName</i>	The name of the PBDOM_ATTRIBUTE object to remove
<i>strNamespacePrefix</i>	Prefix of the namespace of the PBDOM_ATTRIBUTE to remove
<i>strNamespaceUri</i>	URI of the namespace of the PBDOM_ATTRIBUTE to remove

Return value Boolean. Returns true if the specified PBDOM_ATTRIBUTE was removed, and false otherwise.

Throws EXCEPTION_INVALID_ARGUMENT – If any of the input parameters is invalid, for example, null.

EXCEPTION_INVALID_STRING – If the input Attribute Name is invalid (for example, contains a colon), or if the namespace prefix or URI is invalid.

EXCEPTION_MEMORY_ALLOCATION_FAILURE – If a memory allocation failure occurred during the execution of this method.

RemoveChildElement

Description

The RemoveChildElement method is overloaded:

- Syntax 1 removes the first child PBDOM_ELEMENT object (one level deep) that has the local name provided and belongs to no namespace.
- Syntax 2 removes the first child PBDOM_ELEMENT object (one level deep) that has the local name provided and belongs to the specified namespace.

Syntax

For this syntax	See
RemoveChildElement(string <i>strElementName</i>)	RemoveChildElement Syntax 1
RemoveChildElement(string <i>strElementName</i> , string <i>strNamespacePrefix</i> , string <i>strNamespaceUri</i>)	RemoveChildElement Syntax 2

RemoveChildElement Syntax 1

Description

Removes the first child PBDOM_ELEMENT object (one level deep) that has the local name provided and belongs to no namespace.

Syntax

pbdom_element_name.RemoveChildElement(string *strElementName*)

Argument	Description
<i>pbdom_element_name</i>	The name of a PBDOM_ELEMENT object
<i>strElementName</i>	The name of the child PBDOM_ELEMENT object to remove

Return value

Boolean. Returns true if the specified PBDOM_ELEMENT object was removed, and false otherwise.

Throws

EXCEPTION_INVALID_ARGUMENT – If the input parameter is invalid, for example, null.

EXCEPTION_INVALID_STRING – If the input element name is invalid.

See also

GetChildElement
GetChildElements
HasChildElements

HasChildren
IsRootElement
RemoveChildElement Syntax 2
RemoveChildElements

RemoveChildElement Syntax 2

Description Removes the first child PBDOM_ELEMENT object (one level deep) that has the local name provided and belongs to the specified namespace.

Syntax *pbdom_element_name*.RemoveChildElement(string *strElementName*, string *strNamespacePrefix*, string *strNamespaceUri*)

Argument	Description
<i>pbdom_element_name</i>	The name of a PBDOM_ELEMENT object
<i>strElementName</i>	The name of the PBDOM_ELEMENT object to remove
<i>strNamespacePrefix</i>	Prefix of the namespace of the PBDOM_ELEMENT object to remove
<i>strNamespaceUri</i>	URI of the namespace of the PBDOM_ATTRIBUTE to remove

Return value Boolean. Returns true if the specified PBDOM_ELEMENT object was removed and false otherwise.

Throws EXCEPTION_INVALID_ARGUMENT – If the input parameter is invalid, for example, null.

EXCEPTION_INVALID_STRING – If the input element name is invalid or the input namespace prefix or URI is invalid.

See also GetChildElement
GetChildElements
HasChildElements
HasChildren
IsRootElement
RemoveChildElement Syntax 1
RemoveChildElements

RemoveChildElements

- Description** The RemoveChildElements method is overloaded:
- Syntax 1 method removes from the current PBDOM_ELEMENT object all child PBDOM_ELEMENT objects. It uses no parameters.
 - Syntax 2 method removes from the current PBDOM_ELEMENT object all child PBDOM_ELEMENT objects that have the specified local name and belong to no namespace.
 - Syntax 3 removes from the current PBDOM_ELEMENT object all child PBDOM_ELEMENT objects (one level deep) that have the specified local name and belong to the specified namespace.

Syntax

For this syntax	See
RemoveChildElements()	RemoveChildElements Syntax 1
RemoveChildElements(string <i>strElementName</i>)	RemoveChildElements Syntax 2
RemoveChildElements(string <i>strElementName</i> , string <i>strNamespacePrefix</i> , string <i>strNamespaceUri</i>)	RemoveChildElements Syntax 3

RemoveChildElements Syntax 1

Description Removes from the current PBDOM_ELEMENT object all child PBDOM_ELEMENT objects. It uses no parameters.

Syntax *pbdom_element_name*.RemoveChildElements()

Argument	Description
<i>pbdom_element_name</i>	The name of a PBDOM_ELEMENT object

Return value Boolean. Returns true if any child PBDOM_ELEMENT object was removed and false otherwise.

See also

- GetChildElement
- GetChildElements
- HasChildElements
- HasChildren
- IsRootElement
- RemoveChildElement
- RemoveChildElements Syntax 2
- RemoveChildElements Syntax 3

RemoveChildElements Syntax 2

Description Removes from the current PBDOM_ELEMENT object all child PBDOM_ELEMENT objects that have the specified local name and belong to no namespace.

Syntax `pbdom_element_name.RemoveChildElements(string strElementName)`

Argument	Description
<i>pbdom_element_name</i>	The name of a PBDOM_ELEMENT object
<i>strElementName</i>	The name of the child PBDOM_ELEMENT objects to remove

Return value Boolean. Returns true if any child PBDOM_ELEMENT object was removed, and false otherwise.

See also [GetChildElement](#)
[GetChildElements](#)
[HasChildElements](#)
[HasChildren](#)
[IsRootElement](#)
[RemoveChildElement](#)
[RemoveChildElements Syntax 1](#)
[RemoveChildElements Syntax 3](#)

RemoveChildElements Syntax 3

Description Removes from the current PBDOM_ELEMENT object all child PBDOM_ELEMENT objects (one level deep) that have the specified local name and belong to the specified namespace.

Syntax `pbdom_element_name.RemoveChildElements(string strElementName, string strNamespacePrefix, string strNamespaceUri)`

Argument	Description
<i>pbdom_element_name</i>	The name of a PBDOM_ELEMENT object
<i>strElementName</i>	The name of the child PBDOM_ELEMENT objects to remove
<i>strNamespacePrefix</i>	Prefix of the namespace of the child PBDOM_ELEMENT objects to remove
<i>strNamespaceUri</i>	URI of the namespace of the child PBDOM_ATTRIBUTE objects to remove

Return value	Boolean. Returns true if any child PBDOM_ELEMENT object was removed and false otherwise.
Throws	<p>EXCEPTION_INVALID_ARGUMENT – If any of the input parameters is invalid, for example, null.</p> <p>EXCEPTION_INVALID_NAME – If the input element name or namespace prefix or URI is invalid. The only exception is if the input element name is an empty string, in which case all element names match.</p> <p>EXCEPTION_MEMORY_ALLOCATION_FAILURE – If there was any memory allocation failure during the execution of this method.</p>
See also	<p>GetChildElement</p> <p>GetChildElements</p> <p>HasChildElements</p> <p>HasChildren</p> <p>IsRootElement</p> <p>RemoveChildElement</p> <p>RemoveChildElements Syntax 1</p> <p>RemoveChildElements Syntax 2</p>

RemoveContent

Description	Removes a child PBDOM_OBJECT from a PBDOM_ELEMENT object. All children of the removed PBDOM_OBJECT are also removed.						
Syntax	<i>pbdom_element_name.RemoveContent(pbdom_object pbdom_object_ref)</i>						
	<table> <tr> <th>Argument</th><th>Description</th></tr> <tr> <td><i>pbdom_element_name</i></td><td>The name of a PBDOM_ELEMENT object</td></tr> <tr> <td><i>pbdom_object_ref</i></td><td>The PBDOM_OBJECT to remove</td></tr> </table>	Argument	Description	<i>pbdom_element_name</i>	The name of a PBDOM_ELEMENT object	<i>pbdom_object_ref</i>	The PBDOM_OBJECT to remove
Argument	Description						
<i>pbdom_element_name</i>	The name of a PBDOM_ELEMENT object						
<i>pbdom_object_ref</i>	The PBDOM_OBJECT to remove						
Return value	Boolean. Returns true if the specified content was removed and false otherwise.						
Throws	<p>EXCEPTION_USE_OF_UNNAMED_PBDOM_OBJECT – If the input PBDOM_OBJECT has not been given a user-defined name.</p> <p>EXCEPTION_PBDOM_OBJECT_INVALID_FOR_USE – If the input PBDOM_OBJECT is not associated with a derived PBDOM_OBJECT.</p> <p>EXCEPTION_WRONG_DOCUMENT_ERROR – If the input PBDOM_OBJECT is not from the same document as this PBDOM_ELEMENT object.</p> <p>EXCEPTION_WRONG_PARENT_ERROR – If the input PBDOM_OBJECT is not a child of the current PBDOM_ELEMENT object.</p>						

Examples The RemoveContent method is used to modify the following XML fragment:

```
<Telephone_Book>
  <Entry>
    <Particulars>
      <Name>John Doe</Name>
      <Age>21</Age>
      <Phone_Number>1234567</Phone_Number>
    </Particulars>
  </Entry>
</Telephone_Book>
```

The RemoveContent method is invoked from the following PowerScript code:

```
PBDOM_DOCUMENT pbdom_doc
PBDOM_ELEMENT pbdom_entry

pbdom_doc.GetRootElement().RemoveContent(pbdom_entry)
```

The following XML results:

```
<Telephone_Book></Telephone_Book>
```

See also AddContent Syntax 1
AddContent Syntax 2
GetContent
InsertContent
SetContent

RemoveNamespaceDeclaration

Description Removes the specified PBDOM_NAMESPACE declaration for a PBDOM_ELEMENT object. If the namespace prefix is an empty string, RemoveNamespaceDeclaration removes a default namespace declaration.

Syntax *pbdom_element_name*.RemoveNamespaceDeclaration(string *strNamespacePrefix*, string *strNamespaceUri*)

Argument	Description
<i>pbdom_element_name</i>	The name of a PBDOM_ELEMENT object
<i>strNamespacePrefix</i>	Prefix of the namespace declaration to remove
<i>strNamespaceUri</i>	URI of the namespace declaration to remove

Return value Boolean. Returns true if the namespace has been removed from the PBDOM_ELEMENT object, and false otherwise.

Throws	<p>EXCEPTION_INVALID_ARGUMENT – If any of the input parameters is invalid, for example, null.</p> <p>EXCEPTION_INVALID_NAME – If the namespace prefix or URI is invalid, or both the namespace prefix and URI are invalid as a pair.</p> <p>EXCEPTION_MEMORY_ALLOCATION_FAILURE – If any memory allocation failure occurred during the execution of this method.</p>
See also	<p>AddNamespaceDeclaration</p> <p>GetNamespacePrefix</p> <p>GetNamespaceUri</p> <p>GetQualifiedName</p> <p>SetNamespace</p>

SetAttribute

Description	<p>The SetAttribute method is overloaded:</p> <ul style="list-style-type: none"> Syntax 1 adds a predefined PBDOM_ATTRIBUTE object to a PBDOM_ELEMENT object. Syntax 2 adds a PBDOM_ATTRIBUTE object and its value to a PBDOM_ELEMENT object using strings for the name and value of the PBDOM_ATTRIBUTE. Syntax 3 adds an attribute/value pair to a PBDOM_ELEMENT object using strings for the name and value of the PBDOM_ATTRIBUTE, and the prefix and URI of the namespace to which the PBDOM_ATTRIBUTE belongs.
-------------	---

Syntax

For this syntax	See
SetAttribute(<i>pbdom_attribute pbdom_attribute_ref</i>)	SetAttribute Syntax 1
SetAttribute(string <i>strName</i> , string <i>strValue</i>)	SetAttribute Syntax 2
SetAttribute(string <i>strName</i> , string <i>strValue</i> , string <i>strNamespacePrefix</i> , string <i>strNamespaceUri</i> , boolean <i>bVerifyNamespace</i>)	SetAttribute Syntax 3

SetAttribute Syntax 1

Description	<p>Adds a predefined PBDOM_ATTRIBUTE object to a PBDOM_ELEMENT object. Any existing attribute with the same name and namespace URI is overwritten.</p>
-------------	--

Syntax

pbdom_element_name.SetAttribute(*pbdom_attribute* *pbdom_attribute_ref*)

Argument	Description
<i>pbdom_element_name</i>	The name of a PBDOM_ELEMENT object
<i>pbdom_attribute_ref</i>	The PBDOM_ATTRIBUTE object to be set for this PBDOM_ELEMENT object

Return value PBDOM_ELEMENT. The PBDOM_ELEMENT object modified to contain the specified PBDOM_ATTRIBUTE.

Throws

EXCEPTION_INVALID_ARGUMENT – The input PBDOM_ATTRIBUTE is invalid. This can happen if it has not been initialized properly or it is a null object reference.

EXCEPTION_USE_OF_UNNAMED_PBDOM_OBJECT – The input PBDOM_ATTRIBUTE has not been given a user-defined name.

EXCEPTION_PBDOM_OBJECT_ALREADY_HAS_OWNER – The input PBDOM_ATTRIBUTE already has an owner element.

Examples

Example 1 The SetAttribute method is invoked for the following element:

```
<image></image>
```

The SetAttribute method is invoked from the following PowerShell code, where *elem_image* represents the image element from the preceding XML:

```
attr_src.SetName("src")
attr_src.SetValue("logo.gif")
elem_image.SetAttribute(attr_src)
```

The following XML results:

```
<image src="logo.gif"></image>
```

Example 2 The following example demonstrates the impact of setting a PBDOM_ATTRIBUTE for a PBDOM_ELEMENT object where the PBDOM_ELEMENT object already contains an attribute of the same name and namespace URI as the input PBDOM_ATTRIBUTE.

The example creates a PBDOM_DOCUMENT based on the following document:

```
<root xmlns:pre1="http://www.pre.com"
xmlns:pre2="http://www.pre.com">
  <child1 pre1:a="123"/>
</root>
```

Then it creates a PBDOM_ATTRIBUTE object and sets its name to a and its prefix and URI to pre2 and `http://www.pre.com`. The *bVerifyNamespace* argument is set to false because this PBDOM_ATTRIBUTE has not been assigned an owner PBDOM_ELEMENT object yet, so that the verification for a predeclared namespace would fail. The text value is set to 456.

The child1 element already contains an attribute named a that belongs to the namespace `http://www.pre.com`, as indicated by the prefix pre1. The new PBDOM_ATTRIBUTE uses the prefix pre2, but it represents the same namespace URI, so setting the new PBDOM_ATTRIBUTE to child1 successfully replaces the existing pre1:a with the new PBDOM_ATTRIBUTE pre2:a.

```
PBDOM_BUILDER pbdom_buildr
PBDOM_DOCUMENT pbdom_doc
PBDOM_ATTRIBUTE pbdom_attr
string strXML = "<root
xmlns:pre1=~\"http://www.pre.com~\"
xmlns:pre2=~\"http://www.pre.com~\"><child1
pre1:a=~\"123~\"/></root>"

try
    pbdom_buildr = Create PBDOM_BUILDER
    pbdom_doc = pbdom_buildr.BuildFromString (strXML)

    // Create a PBDOM_ATTRIBUTE and set its properties
    pbdom_attr = Create PBDOM_ATTRIBUTE
    pbdom_attr.SetName ("a")
    pbdom_attr.SetNamespace ("pre2", &
        "http://www.pre.com", false)
    pbdom_attr.SetText ("456")

    // Attempt to obtain the child1 element and
    // set the new attribute to it
    pbdom_doc.GetRootElement(). &
        GetChildElement("child1").SetAttribute(pbdom_attr)

    pbdom_doc.SaveDocument &
        ("pbdom_elem_set_attribute_1.xml")

catch (PBDOM_EXCEPTION except)
    MessageBox ("PBDOM_EXCEPTION", except.GetMessage())
end try
```

When saved and converted to an XML document, the document looks like the following :

```
<root xmlns:pre1="http://www.pre.com"
xmlns:pre2="http://www.pre.com"
  <child1 pre2:a="456"/
</root
```

Usage This method allows the caller to add a predefined PBDOM_ATTRIBUTE object to a PBDOM_ELEMENT object. If this PBDOM_ELEMENT object already contains an existing attribute with the same name and namespace URI as the input PBDOM_ATTRIBUTE, the existing attribute is replaced by the input PBDOM_ATTRIBUTE.

If a PBDOM_ATTRIBUTE has been created to represent the original attribute, it is still valid after the call, but the attribute that it represents has been detached from the original owner element. Calling GetOwnerElementObject on this PBDOM_ATTRIBUTE returns a null value.

See also GetAttribute
GetAttributes
GetAttributeValue
HasAttributes
SetAttribute Syntax 2
SetAttribute Syntax 3
SetAttributes

SetAttribute Syntax 2

Description Adds a PBDOM_ATTRIBUTE object and its value to a PBDOM_ELEMENT object. Any existing attribute with the same name and namespace URI is overwritten.

Syntax *pbdom_element_name*.SetAttribute(string *strName*, string *strValue*)

Argument	Description
<i>pbdom_element_name</i>	The name of a PBDOM_ELEMENT object
<i>strName</i>	The name of the PBDOM_ATTRIBUTE to be added
<i>strValue</i>	The value of the PBDOM_ATTRIBUTE to be added

Return value PBDOM_ELEMENT. The PBDOM_ELEMENT object modified to contain the specified PBDOM_ATTRIBUTE with the specified value.

Throws

EXCEPTION_INVALID_ARGUMENT – One or both of the input strings are invalid. This can happen if either or both strings have not been initialized properly or are null.

EXCEPTION_MEMORY_ALLOCATION_FAILURE – Insufficient memory was encountered while executing this method.

EXCEPTION_PBDOM_OBJECT_INVALID_FOR_USE – This PBDOM_ELEMENT object's internal implementation is null. The occurrence of this exception is rare but can take place if severe memory corruption occurs.

EXCEPTION_INVALID_NAME – An invalid name for the attribute is supplied.

EXCEPTION_INVALID_STRING – An invalid string for the attribute value is supplied.

Examples

Example 1 The SetAttribute method is invoked for the following XML element:

```
<code0789725045</code>
```

The SetAttribute method is invoked from the following PowerScript statement, where elem_code represents the code element:

```
elem_code.SetAttribute("type", "ISBN")
```

The following XML element results:

```
<code type="ISBN">0789725045</code>
```

Example 2 The following example demonstrates the effect of setting an attribute for a PBDOM_ELEMENT object when the PBDOM_ELEMENT object already contains an attribute of the same name. The example creates a PBDOM_DOCUMENT based on the following document:

```
<root xmlns:pre1="http://www.pre.com">
  <child1 pre1:a="123" b="456"/>
</root>
```

The child1 element already contains an attribute named b with value 456. Calling the SetAttribute method with name b and value 789 creates a new attribute for child1 that replaces the original b attribute.

```
PBDOM_BUILDER      pbdom_buildr
PBDOM_DOCUMENT     pbdom_doc
string strXML = "<root
xmlns:pre1=~\"http://www.pre.com~\" ><child1
pre1:a=~\"123~\" b=~\"456~\"/></root>"

try
  pbdom_buildr = Create PBDOM_BUILDER
```

```
        pbdom_doc = pbdom_buildr.BuildFromString (strXML)
        pbdom_doc.GetRootElement(). &
            GetChildElement("child1").SetAttribute("b", "789")
    catch (PBDOM_EXCEPTION except)
        MessageBox ("PBDOM_EXCEPTION", except.GetMessage())
    end try
```

After the PBDOM_DOCUMENT object is saved and converted to XML, the XML document looks like the following:

```
<root xmlns:pre1="http://www.pre.com">
    <child1 pre1:a="123" b="789"/>
</root>
```

Usage This method allows the caller to add an attribute/value pair to a PBDOM_ELEMENT object. If the PBDOM_ELEMENT object already contains an existing attribute that has the same name as the input name and that belongs to no namespace, the original attribute is removed from this PBDOM_ELEMENT object and a new one (corresponding to the specified attribute name and value) is created and set in its place.

If a PBDOM_ATTRIBUTE has been created to represent the original attribute, it is still valid, but the attribute that it represents has been detached from the original owner element. Calling GetOwnerElementObject on this PBDOM_ATTRIBUTE returns a null value.

- See also
- GetAttribute
GetAttributes
GetAttributeValue
HasAttributes
SetAttribute Syntax 1
SetAttribute Syntax 3
SetAttributes

SetAttribute Syntax 3

Description Adds an attribute/value pair to a PBDOM_ELEMENT object. The attribute namespace is specified, and any existing attribute of the same name and namespace URI is removed.

Syntax *pbdom_element_name*.SetAttribute(string *strName*, string *strValue*, string *strNamespacePrefix*, string *strNamespaceUri*, boolean *bVerifyNamespace*)

Argument	Description
<i>pbdom_element_name</i>	The name of a PBDOM_ELEMENT object

Argument	Description
<i>strName</i>	The name of the PBDOM_ATTRIBUTE to be added
<i>strValue</i>	The value of the PBDOM_ATTRIBUTE to be added
<i>strNamespacePrefix</i>	The prefix of the namespace to which the PBDOM_ATTRIBUTE belongs
<i>strNamespaceUri</i>	The URI of the namespace to which the PBDOM_ATTRIBUTE belongs
<i>bVerifyNamespace</i>	Specifies whether or not the method should verify the existence of an in-scope namespace declaration for the given prefix and URI

Return value Long. Returns 0 if no namespace verification error occurs and -1 if no in-scope namespace declaration exists for the given prefix and URI settings.

Throws EXCEPTION_INVALID_ARGUMENT – If any of the arguments is invalid. This can happen if any of the input strings has been set to null using the PowerScript SetNull function.

EXCEPTION_PBDOM_OBJECT_INVALID_FOR_USE – This PBDOM_ELEMENT object's internal implementation is null. The occurrence of this exception is rare but can take place if severe memory corruption occurs.

EXCEPTION_INVALID_NAME – The input namespace prefix or the URI, or their combination, is not valid. This will happen if:

- The namespace prefix is an empty string and the URI is not an empty string. If both are empty strings, the NONNAMESPACE namespace is being specified and this prefix/URI combination is correct.
- The namespace prefix is xmlns and the URI is not <http://www.w3.org/2000/xmlns/>. This namespace prefix/URI pair is unique and exclusive and cannot be used separately. The use of this pair signifies a namespace declaration.
- The namespace prefix string is invalid. That is, it does not conform to the W3C “Namespaces in XML” specifications for the name of a prefix.
- The namespace URI string is invalid. That is, it does not conform to the W3C specifications for a URI string.

EXCEPTION_MEMORY_ALLOCATION_FAILURE – If there has been any memory allocation failure during this method call.

Examples **Example 1** The SetAttribute method is invoked for the following XML element:

```
<code>0789725045</code>
```

The `SetAttribute` method is invoked from the following PowerScript statement, where `elem_code` represents the code element:

```
elem_code.SetAttribute("type", "ISBN", "ns", &
    "http://www.books.com/codes", false)
```

The following XML element results:

```
<code ns:type="ISBN">0789725045</code>
```

Example 2 The following example demonstrates the effect of setting an attribute with a particular name and namespace URI for an element that already contains an existing attribute with the same name and namespace URI. It creates a `PBDOM_DOCUMENT` based on the following XML:

```
<root xmlns:pre1="http://www.pre.com"
xmlns:pre2="http://www.pre.com">
    <child1 pre1:a="123"/>
</root>
```

The `child1` element already contains an attribute named `a` that belongs to the namespace `http://www.pre.com`, as indicated by the `pre1` prefix. The call to `SetAttribute` attempts to set an attribute for `child1` with the same name, `a`, but with the namespace prefix `pre2`.

The last parameter, *bVerifyNamespace*, is set to `true`. This tells the `SetAttribute` method to check first to see if an in-scope namespace declaration for `pre2` and `http://www.pre.com` exists. An in-scope declaration for this namespace prefix/URI pair does exist, and so the verification succeeds.

The original `pre1:a` attribute is removed from the `child1` element and a new attribute `pre2:a`, belonging to the same namespace and with the value `456`, is created and set in its place. The new attribute replaces the original attribute, instead of being set as an additional attribute, because both attributes have the same URI.

```
PBDOM_BUILDER      pbdom_buildr
PBDOM_DOCUMENT     pbdom_doc
string strXML = "<root
xmlns:pre1=~\"http://www.pre.com~\"
xmlns:pre2=~\"http://www.pre.com~\"><child1
pre1:a=~\"123~\"/></root>"

try
    pbdom_buildr = Create PBDOM_BUILDER
    pbdom_doc = pbdom_buildr.BuildFromString (strXML)
```



```
pbdom_doc.GetRootElement().GetChildElement("child1").SetAttribute("a", "456", "pre2", "http://www.pre.com", true)

catch (PBDOM_EXCEPTION pbdom_except)
    MessageBox ("PBDOM_EXCEPTION",
pbdom_except.GetMessage())
end try
```

Usage

This method allows the caller to add an attribute/value pair to a PBDOM_ELEMENT object.

The parameter *bVerifyNamespace*, when set to true, instructs the method to perform a thorough search up the DOM node tree, starting at the current PBDOM_ELEMENT object, to check for an in-scope namespace declaration for the given prefix and URI. If a namespace declaration is not found, no attribute is created. If a namespace declaration is found, an attribute is created.

If the *bVerifyNamespace* parameter is set to false, no verification search is performed, and the method always returns 0.

If the PBDOM_ELEMENT object already contains an existing attribute that has the same name as the input name and the same namespace URI as the input namespace URI, the original attribute is replaced with a new one with the same name and URI.

If a PBDOM_ATTRIBUTE has been created to represent the original attribute, it is still valid, but the attribute that it represents has been detached from the original owner element. Calling `GetOwnerElementObject` on this PBDOM_ATTRIBUTE returns a null value.

See also

`GetAttribute`
`GetAttributes`
`GetAttributeValue`
`HasAttributes`
`SetAttribute Syntax 1`
`SetAttribute Syntax 2`
`SetAttributes`

SetAttributes

Description

Sets the attributes for the DOM element represented by the current PBDOM_ELEMENT object.

Syntax

```
pbdom_element_name.SetAttributes(pbdom_attribute
pbdom_attribute_array[])
```

Argument	Description
<i>pbdom_element_name</i>	The name of a PBDOM_ELEMENT object
<i>pbdom_attribute_array</i>	An array of PBDOM_ATTRIBUTE objects

Return value

PBDOM_ELEMENT. The PBDOM_ELEMENT object modified.

Throws

EXCEPTION_PBDOM_OBJECT_INVALID_FOR_USE – The internal implementation of this **PBDOM_ELEMENT** object or one of the **PBDOM_ATTRIBUTE** array items is null. This exception is rare but can take place if severe memory corruption occurs.

EXCEPTION_INVALID_ARGUMENT – One of the `PBDOM_ATTRIBUTE` array items is null.

EXCEPTION_INVALID_NAME – If two or more **PBDOM_ATTRIBUTES** in the array contain the same name and namespace URI.

EXCEPTION_USE_OF_UNNAMED_PBDOM_OBJECT – One of the PBDOM_ATTRIBUTE array items has not been named.

EXCEPTION_PBDOM_OBJECT_ALREADY_HAS_OWNER – One of the **PBDOM_ATTRIBUTE** array items already has an owner **PBDOM_ELEMENT** object.

Examples

This example demonstrates setting the attributes of a `PBDOM_ELEMENT` object using an array of `PBDOM_ATTRIBUTE` objects. It builds a `PBDOM_DOCUMENT` based on the following XML:

```
<root xmlns:pre1="http://www.pre.com">
  <child1 pre1:a="123"/>
</root>
```

The code creates an array of three `PBDOM_ATTRIBUTE` objects with names `a`, `b`, and `c`, and sets their namespace prefixes and URIs to `pre1` and `http://www.pre.com`. The call to `SetAttributes` attempts to set the attributes of `child1` using the `PBDOM_ATTRIBUTES` of this array. When `PBDOM_DOCUMENT` is saved and converted to an XML document, the result is:

```
<root xmlns:pre1="http://www.pre.com">
  <child1 pre1:a="456" pre1:b="456" pre1:c="456" />
</root>
```

Although child1 originally contained the pre1:a attribute, and the PBDOM_ATTRIBUTE array also contained an item with name a within the namespace URI http://www.pre.com, no exception is thrown. The original pre1:a attribute is replaced by the PBDOM_ATTRIBUTE array item with name a within the namespace URI http://www.pre.com.

```

PBDOM_BUILDER      pbdom_buildr
PBDOM_DOCUMENT     pbdom_doc
PBDOM_ATTRIBUTE    pbdom_attr_array[]
string             Name[]
long               l = 0
string strXML = "<root
xmlns:pre1=~\"http://www.pre.com~\"><child1
pre1:a=~\"123~\"/></root>"

try
    pbdom_buildr = Create PBDOM_BUILDER
    pbdom_doc = pbdom_buildr.BuildFromString (strXML)

    Name[1] = "a"
    Name[2] = "b"
    Name[3] = "c"

    for l = 1 to 3
        pbdom_attr_array[l] = Create PBDOM_ATTRIBUTE
        pbdom_attr_array[l].SetName (Name[l])
        pbdom_attr_array[l].SetNamespace ("pre1", &
            "http://www.pre.com", false)
        pbdom_attr_array[l].SetText ("456")
    next

    pbdom_doc.GetRootElement().GetChildElement &
        ("child1").SetAttributes(pbdom_attr_array)
    pbdom_doc.SaveDocument ("set_attributes.xml")

catch (PBDOM_EXCEPTION except)
    MessageBox ("PBDOM_EXCEPTION", except.GetMessage())
end try

```

Usage

This method sets the attributes of the DOM element represented by this PBDOM_ELEMENT object. The supplied array should contain only objects of type PBDOM_ATTRIBUTE.

When all objects in the supplied array are legal and before the new attributes are added, all old attributes have their parentage set to null (no parent) and the old attribute list is cleared from this PBDOM_ELEMENT object. This has the effect that any active attribute list (previously obtained with a call to `GetAttributes`) also changes to reflect the new situation with the old attributes. In addition, all PBDOM_ATTRIBUTES in the supplied array have their parentage set to this current PBDOM_ELEMENT object.

Passing an empty array clears the existing attributes of this PBDOM_ELEMENT object.

This method fails and an exception is thrown if the PBDOM_ATTRIBUTE array contains two or more PBDOM_ATTRIBUTES with the same name and namespace URI.

No exception is thrown if this PBDOM_ELEMENT object contains an existing attribute whose name and namespace URI matches one of the PBDOM_ATTRIBUTE array items. All the existing attributes of this PBDOM_ELEMENT object are removed, so it does not matter whether any existing attribute matches any of the PBDOM_ATTRIBUTE items in the array in terms of name and namespace URI.

In the event of an exception, the original attributes of the PBDOM_ELEMENT object remain unchanged, and the PBDOM_ATTRIBUTES in the supplied array are not altered.

If any PBDOM_ATTRIBUTE has been created to represent any original attribute, it is still valid, but the attribute it represents has been detached from the original owner element. Calling `GetOwnerElementObject` on this PBDOM_ATTRIBUTE returns a null value.

See also

`GetAttribute`
`GetAttributes`
`GetAttributeValue`
`HasAttributes`
`SetAttribute`

SetContent

Description

Sets the content of the PBDOM_ELEMENT object using an array containing PBDOM_OBJECT objects legal for a PBDOM_ELEMENT object. Any existing children of the PBDOM_ELEMENT object are removed when the `SetContent` method is invoked.

If the input array reference is null, all contents of the PBDOM_ELEMENT object are removed. If the array contains illegal objects, an exception is thrown, and nothing is altered.

Syntax

pbdom_element_name.SetContent(*pbdom_object pbdom_object_array*[])

Argument	Description
<i>pbdom_element_name</i>	The name of a PBDOM_ELEMENT object
<i>pbdom_object_array</i>	An array of PBDOM_OBJECTS to form the contents the PBDOM_ELEMENT object

Return value

PBDOM_OBJECT. The PBDOM_ELEMENT object modified and returned as a PBDOM_OBJECT.

Throws

EXCEPTION_USE_OF_UNNAMED_PBDOM_OBJECT – If an input PBDOM_OBJECT array item has not been given a user-defined name.

EXCEPTION_PBDOM_OBJECT_INVALID_FOR_USE – If an input PBDOM_OBJECT array item is not associated with a derived PBDOM_OBJECT.

EXCEPTION_PBDOM_OBJECT_ALREADY_HAS_PARENT – If an input PBDOM_OBJECT array item already has a parent PBDOM_OBJECT.

EXCEPTION_INAPPROPRIATE_USE_OF_PBDOM_OBJECT – If an inappropriate PBDOM_OBJECT array item is found. This happens if the PBDOM_OBJECT array item is not allowed to be added as a child of a PBDOM_ELEMENT object (for example, a PBDOM_DOCUMENT).

EXCEPTION_HIERARCHY_ERROR – If one of the PBDOM_OBJECT array items, if set as part of the contents of this PBDOM_ELEMENT object, will cause the current PBDOM_ELEMENT object to be no longer well formed.

Examples

The SetContent method is invoked on the following XML fragment:

```
<Telephone_Book>
  <Entry>
    <Particulars>
      <Name>John Doe</Name>
      <Age>21</Age>
      <Phone_Number>1234567</Phone_Number>
    </Particulars>
  </Entry>
</Telephone_Book>
```

The SetContent method is invoked from the following PowerShell code:

```
PBDOM_OBJECT pbdom_obj_array[]
```

```
pbdom_obj_array[1] = entry_1
pbdom_obj_array[2] = entry_2

pbdom_doc.GetRootElement().SetContent(pbdom_obj_array)
```

The entry_1 PBDOM_ELEMENT object contains the following:

```
<Entry>
  <Particulars>
    <Name>James Gomez</Name>
    <Age>25</Age>
    <Phone_Number>1111111</Phone_Number>
  </Particulars>
</Entry>
```

The entry_2 PBDOM_ELEMENT object contains the following:

```
<Entry>
  <Particulars>
    <Name>Mary Jones</Name>
    <Age>22</Age>
    <Phone_Number>2222222</Phone_Number>
  </Particulars>
</Entry>
```

The SetContent method returns the following:

```
<Telephone_Book>
  <Entry>
    <Particulars>
      <Name>James Gomez</Name>
      <Age>25</Age>
      <Phone_Number>1111111</Phone_Number>
    </Particulars>
  </Entry>
  <Entry>
    <Particulars>
      <Name>Mary Jones</Name>
      <Age>22</Age>
      <Phone_Number>2222222</Phone_Number>
    </Particulars>
  </Entry>
</Telephone_Book>
```

Usage

Only the following PBDOM_OBJECT types can be validly added to a PBDOM_ELEMENT object:

- PBDOM_ELEMENT
- PBDOM_CDATA

- PBDOM_COMMENT
- PBDOM_ENTITYREFERENCE
- PBDOM_PROCESSINGINSTRUCTION
- PBDOM_TEXT

See also

AddContent Syntax 1
AddContent Syntax 2
GetContent
InsertContent
RemoveContent

SetDocument

Description

Sets a PBDOM_DOCUMENT as parent of a PBDOM_ELEMENT object, making the PBDOM_ELEMENT object the root element.

Syntax

pbdom_element_name.SetDocument(*pbdom_document*
pbdom_document_ref)

Argument	Description
<i>pbdom_element_name</i>	The name of a PBDOM_ELEMENT object
<i>pbdom_document_ref</i>	The PBDOM_DOCUMENT to be set as the owner document and parent of this PBDOM_ELEMENT object

Return value

PBDOM_ELEMENT. The modified PBDOM_ELEMENT object.

Usage

The PBDOM_OBJECT referenced must be a PBDOM_DOCUMENT object. The PBDOM_ELEMENT object must not already have a parent object. If the target PBDOM_DOCUMENT already has a root element, the existing root element is replaced by the new PBDOM_ELEMENT object.

SetName

Description

Sets the local name of a PBDOM_ELEMENT object. This name refers to the local portion of the element tag name.

Syntax

pbdom_element_name.SetName(string *strName*)

Argument	Description
<i>pbdom_element_name</i>	The name of a PBDOM_ELEMENT object
<i>strName</i>	The new local name for the PBDOM_ELEMENT object

Return value	Boolean. Returns true if the local name of the PBDOM_ELEMENT object has been changed, and false otherwise.
Examples	<p>The SetName method is invoked for the abc element of the following XML fragment:</p> <pre><abc>My Data</abc></pre> <p>The SetName method is invoked in the following PowerShell code, in which the PBDOM_ELEMENT object elem represents the abc element.</p> <pre>elem.SetName("def")</pre> <p>The following XML results:</p> <pre><def>My Data</def></pre> <p>Since the elem object still represents the same element, calling the SetName method changes the def element.</p>
See also	GetName

SetNamespace

Description	Sets the namespace for a PBDOM_ELEMENT object. If the namespace prefix and URI provided are empty strings, SetNamespace assigns no namespace to the PBDOM_ELEMENT object.
-------------	---

Syntax	<p><i>pbdom_element_name</i>.SetNamespace(string <i>strNamespacePrefix</i>, string <i>strNamespaceUri</i>, boolean <i>bVerifyNamespace</i>)</p> <table><tr><th>Argument</th><th>Description</th></tr><tr><td><i>pbdom_element_name</i></td><td>The name of a PBDOM_ELEMENT object</td></tr><tr><td><i>strNamespacePrefix</i></td><td>Prefix of the namespace to be set for the PBDOM_ELEMENT object</td></tr><tr><td><i>strNamespaceUri</i></td><td>URI of the namespace to be set for the PBDOM_ELEMENT object</td></tr><tr><td><i>bVerifyNamespace</i></td><td>A boolean value indicating whether verification should be performed to ensure that the provided namespace prefix and URI have been declared either within this PBDOM_ELEMENT object or in an ancestor PBDOM_ELEMENT object</td></tr></table>	Argument	Description	<i>pbdom_element_name</i>	The name of a PBDOM_ELEMENT object	<i>strNamespacePrefix</i>	Prefix of the namespace to be set for the PBDOM_ELEMENT object	<i>strNamespaceUri</i>	URI of the namespace to be set for the PBDOM_ELEMENT object	<i>bVerifyNamespace</i>	A boolean value indicating whether verification should be performed to ensure that the provided namespace prefix and URI have been declared either within this PBDOM_ELEMENT object or in an ancestor PBDOM_ELEMENT object
Argument	Description										
<i>pbdom_element_name</i>	The name of a PBDOM_ELEMENT object										
<i>strNamespacePrefix</i>	Prefix of the namespace to be set for the PBDOM_ELEMENT object										
<i>strNamespaceUri</i>	URI of the namespace to be set for the PBDOM_ELEMENT object										
<i>bVerifyNamespace</i>	A boolean value indicating whether verification should be performed to ensure that the provided namespace prefix and URI have been declared either within this PBDOM_ELEMENT object or in an ancestor PBDOM_ELEMENT object										

Return value	Long. Returns 0 for success and -1 if no in-scope namespace declaration matching the input prefix and URI exists.
Throws	EXCEPTION_INVALID_ARGUMENT – If any of the input arguments is invalid, for example, null.

EXCEPTION_INVALID_NAME – If the input namespace prefix or URI is invalid.

EXCEPTION_MEMORY_ALLOCATION_FAILURE – If a memory allocation failure occurred during the execution of this method.

EXCEPTION_INTERNAL_XML_ENGINE_ERROR – If an internal XML engine failure occurred during the execution of this method.

Usage

If *bVerifyNamespace* is set to true and the namespace prefix and URI have not been declared, SetNamespace returns a value of -1 and fails.

If *bVerifyNamespace* is set to false, SetNamespace sets the namespace of the PBDOM_ELEMENT object to the specified prefix and URI. It is the responsibility of the PBDOM user to ensure that such a namespace is declared and is in scope for this PBDOM_ELEMENT object before the document is saved and converted to an XML document.

See also

AddNamespaceDeclaration
GetNamespacePrefix
GetNamespaceUri
GetQualifiedName
RemoveNamespaceDeclaration

SetParentObject

Description

Sets the referenced PBDOM_OBJECT as the parent of the PBDOM_ELEMENT object from which the method is invoked.

Syntax

pbdom_element_name.SetParentObject(*pbdom_object pbdom_object_ref*)

Argument	Description
<i>pbdom_element_name</i>	The name of a PBDOM_ELEMENT object
<i>pbdom_object_ref</i>	The PBDOM_OBJECT to be set as the parent of this PBDOM_ELEMENT object

Return value

PBDOM_OBJECT. The PBDOM_ELEMENT object modified and returned as a PBDOM_OBJECT.

Throws

EXCEPTION_PBDOM_OBJECT_INVALID_FOR_USE – If the input PBDOM_OBJECT is not associated with a derived PBDOM_OBJECT.

EXCEPTION_PBDOM_OBJECT_ALREADY_HAS_PARENT – The input PBDOM_OBJECT already has a parent.

EXCEPTION_INAPPROPRIATE_USE_OF_PBDOM_OBJECT – If the input PBDOM_OBJECT is not allowed to be the parent of a PBDOM_ELEMENT object.

EXCEPTION_USE_OF_UNNAMED_PBDOM_OBJECT – If the input PBDOM_OBJECT is nameable and has not been named.

- Usage
- If the class of the referenced PBDOM_OBJECT is PBDOM_DOCUMENT, then the behavior of SetParentObject is identical to that of the SetDocument method. If the class of the referenced PBDOM_OBJECT is PBDOM_ELEMENT, SetParentObject sets the referenced object as the parent of the PBDOM_ELEMENT object from which the method is invoked. If the referenced PBDOM_OBJECT is of any other class, an exception is thrown.
- See also
- GetOwnerDocumentObject
GetParentObject

SetText

- Description
- Sets the content of a PBDOM_ELEMENT object to the text provided.
- Syntax
- pbdom_element_name*.SetText(string *strText*)

Argument	Description
<i>pbdom_element_name</i>	The name of a PBDOM_ELEMENT object
<i>strText</i>	String to be set as the content of the PBDOM_ELEMENT object

- Return value
- PBDOM_OBJECT. The PBDOM_ELEMENT object modified and returned as a PBDOM_OBJECT.
- Usage
- Existing text content and non-text content are replaced by the text provided in *strText*. A value of null for *strText* is equivalent to an empty string value. If the PBDOM_ELEMENT is to have both text content and nested elements, use the SetContent method instead of SetText.
- See also
- GetText
GetTextNormalize
GetTextTrim

About this chapter

This chapter lists PBDOM exception codes and describes the PBDOM_EXCEPTION class.

Contents

Topic	Page
PBDOM exceptions	259
PBDOM_EXCEPTION	265

PBDOM exceptions

PBDOM defines an exception class derived from the standard PowerBuilder Exception class. This class extends the Exception class with a method, `GetExceptionCode`, that returns the unique code that identifies the exception being thrown.

The following table lists PBDOM exceptions and their code values. The circumstances in which each exception is thrown are described after the table.

Table 14-1: PBDOM exceptions and code values

Exception	Value
EXCEPTION_USE_OF_UNNAMED_PBDOM_OBJECT	1
EXCEPTION_WRONG_DOCUMENT_ERROR	2
EXCEPTION_MULTIPLE_ROOT_ELEMENT	3
EXCEPTION_INAPPROPRIATE_USE_OF_PBDOM_OBJECT	4
EXCEPTION_PBDOM_OBJECT_INVALID_FOR_USE	5
EXCEPTION_PBDOM_OBJECT_ALREADY_HAS_PARENT	6
EXCEPTION_MULTIPLE_DOCTYPE	7
EXCEPTION_ILLEGAL_PBOBJECT	8
EXCEPTION_WRONG_PARENT_ERROR	9
EXCEPTION_INVALID_ARGUMENT	10
EXCEPTION_INVALID_NAME	11
EXCEPTION_DATA_CONVERSION	12

Exception	Value
EXCEPTION_MEMORY_ALLOCATION_FAILURE	13
EXCEPTION_INTERNAL_XML_ENGINE_ERROR	14
EXCEPTION_MULTIPLE_XMLDECL	15
EXCEPTION_INVALID_STRING	16
EXCEPTION_INVALID_OPERATION	17
EXCEPTION_HIERARCHY_ERROR	18
EXCEPTION_PBDOM_OBJECT_ALREADY_HAS_OWNER	19
EXCEPTION_PBDOM_NOT_INITIALIZED	20

PBDOM exception descriptions

EXCEPTION_USE_OF_UNNAMED_PBDOM_OBJECT

Code Value: 1

This exception is thrown when a nameable PBDOM_OBJECT is used—for example, to invoke a method or serve as a parameter—without first being given a user-defined name.

EXCEPTION_WRONG_DOCUMENT_ERROR

Code Value: 2

This exception is thrown when incorrect PBDOM_DOCUMENT objects are used when performing a PBDOM operation.

For example, in a RemoveContent method call, if the PBDOM_OBJECT you want to remove is not from the same document as the active PBDOM_DOCUMENT whose RemoveContent method is being invoked, this exception is thrown.

EXCEPTION_MULTIPLE_ROOT_ELEMENT

Code Value: 3

This exception is thrown when a PBDOM method call causes a PBDOM_DOCUMENT to contain more than one root element.

For example, in an AddContent method call, if the input PBDOM_OBJECT to add is a PBDOM_ELEMENT and the active PBDOM_DOCUMENT already contains a root element, this exception is thrown.

EXCEPTION_INAPPROPRIATE_USE_OF_PBDOM_OBJECT

Code Value: 4

This exception is thrown when a PBDOM_OBJECT is used in an inappropriate manner. A typical scenario is one in which a PBDOM method call results in the violation of the well-formedness of a PBDOM_DOCUMENT.

For example, in an AddContent method invoked on a PBDOM_DOCUMENT object, only PBDOM_OBJECTs of class PBDOM_ELEMENT, PBDOM_COMMENT, PBDOM_PROCESSINGINSTRUCTION, and PBDOM_DOCTYPE can be added. The inclusion of PBDOM_OBJECTs of any other class results in this exception being thrown.

EXCEPTION_PBDOM_OBJECT_INVALID_FOR_USE

Code Value: 5

This exception is thrown when an invalid PBDOM_OBJECT is used, either directly to invoke a method, or as a parameter.

Situations where a PBDOM_OBJECT is deemed invalid include those where a PBDOM_OBJECT is instantiated as a PBDOM_OBJECT and not as a derived class object. They also include the situation where a PBDOM_CHARACTERDATA object is instantiated directly as a PBDOM_CHARACTERDATA object.

EXCEPTION_PBDOM_OBJECT_ALREADY_HAS_PARENT

Code Value: 6

This exception occurs when a PBDOM_OBJECT is set to be the child of another PBDOM_OBJECT, but the prospective child already has a parent PBDOM_OBJECT.

Examples of such method calls include the AddContent method and the SetParentObject, SetContent, and InsertContent methods of all classes derived from PBDOM_OBJECT classes.

EXCEPTION_MULTIPLE_DOCTYPE

Code Value: 7

This exception is thrown when a PBDOM method call causes a PBDOM_DOCUMENT to contain more than one DOCTYPE.

For example, in an AddContent method call, if the input PBDOM_OBJECT to add is a PBDOM_DOCTYPE and the active PBDOM_DOCUMENT already contains a DOCTYPE DOM Node, this exception is thrown.

EXCEPTION_ILLEGAL_PBOBJECT

Code Value: 8

This exception is thrown in method calls that take an array of PBDOM_OBJECTs in which one of the array items is invalid. A PBDOM_OBJECT array item is deemed to be invalid when it has been specifically set to null or has not been initialized properly.

EXCEPTION_WRONG_PARENT_ERROR

Code Value: 9

This exception is thrown when an incorrect parent/child relationship error is encountered during a PBDOM operation.

Method calls in which this exception might be thrown include InsertContent and RemoveContent. These methods involve at least one PBDOM_OBJECT parameter that is assumed to be a child of the PBDOM_OBJECT to which the method is applied. If this parameter is not a child of the current PBDOM_OBJECT, this exception is thrown.

EXCEPTION_INVALID_ARGUMENT

Code Value: 10

This exception is thrown when an input PBDOM_OBJECT parameter to a method is invalid. This can happen if it has not been initialized properly, or if it is a null object reference.

This exception might also be thrown when an input string parameter to a method is invalid. This can happen if the string has been set to null using the PowerScript SetNull function.

EXCEPTION_INVALID_NAME

Code Value: 11

This exception is thrown when a name is supplied as a parameter and the name does not conform to the W3C specifications for an XML name or namespace prefix or namespace URI.

Methods in which this exception might be thrown include the `SetName`, `SetNamespace`, and `SetNamespace` methods.

EXCEPTION_DATA_CONVERSION

Code Value: 12

This exception is thrown when you attempt to perform a data conversion operation and the conversion fails. This exception is thrown only in the `PBDOM_ATTRIBUTE` object's `Get` methods, for example, `GetDateValue` in `PBDOM_ATTRIBUTE`.

EXCEPTION_MEMORY_ALLOCATION_FAILURE

Code Value: 13

This exception is thrown when insufficient memory is encountered while executing a method. `PBDOM` internally allocates, frees, and reallocates memory for storing strings, structures, and so on. Each memory allocation might fail, and if this occurs, this exception is thrown.

EXCEPTION_INTERNAL_XML_ENGINE_ERROR

Code Value: 14

This exception is thrown when an internal error occurs that involves the XML engine used by `PBDOM`. `PBDOM` currently uses the Xerces XML parser as the underlying device for processing XML documents and for building up and sustaining the DOM tree.

There may be problems in the low-level XML parser engine, and if one is encountered, this exception, which is rare, might be thrown.

EXCEPTION_MULTIPLE_XMLDECL

Code Value: 15

This exception is thrown when a PBDOM method call causes a PBDOM_DOCUMENT to contain more than one XML declaration.

For example, in a SetContent method call invoked on a PBDOM_DOCUMENT object, if the input PBDOM_OBJECT array contains more than one PBDOM_PROCESSINGINSTRUCTION that is constructed as an XML declaration, this exception is thrown.

EXCEPTION_INVALID_STRING

Code Value: 16

This exception is thrown when a string is supplied as a parameter to a method that sets a text or attribute value, and the string contains characters that do not conform to the W3C specifications for acceptable XML characters.

Methods in which this exception might be thrown include SetText in PBDOM_ATTRIBUTE and SetAttribute in PBDOM_ELEMENT.

EXCEPTION_INVALID_OPERATION

Code Value: 17

This exception is thrown when a method call could potentially cause severe and unexpected problems to the currently running PowerBuilder application.

EXCEPTION_HIERARCHY_ERROR

Code Value: 18

This exception is thrown when a method call violates the well-formedness or validity of a PBDOM_DOCUMENT.

EXCEPTION_PBDOM_OBJECT_ALREADY_HAS_OWNER

Code Value : 19

This exception is thrown when a PBDOM_ELEMENT is set as the owner of a PBDOM_ATTRIBUTE when the specified PBDOM_ATTRIBUTE already has an owner PBDOM_ELEMENT.

EXCEPTION_PBDOM_NOT_INITIALIZED

Code Value : 20

This exception is thrown in rare circumstances in which the PBDOM engine has failed to be initialized or has been uninitialized prematurely. In such situations, an exception is thrown to prevent a crash.

PBDOM_EXCEPTION

Description The PBDOM_EXCEPTION class is derived from the PowerBuilder Exception class.

Methods This class extends the Exception class with one method that returns the unique code that identifies the exception being thrown:

GetExceptionCode

GetExceptionCode

Description Returns the code of the exception being thrown.

Syntax *pbdom_exception*.GetExceptionCode()

Argument	Description
<i>pbdom_exception</i>	The name of a PBDOM_EXCEPTION object

Return value Long. The code value associated with the exception being thrown.

Examples In this example, an attempt to call the PBDOM_ELEMENT GetAttribute method on the root element of a PBDOM_DOCUMENT with the parameter *xmlns:nuskin* causes an exception to be thrown, because the name is not a valid NCName (no-colon-name). The correct way to get an attribute that belongs to a namespace is to use the namespace version of the PBDOM_ELEMENT GetAttribute method.

The EXCEPTION_INVALID_NAME (code value 11) exception is thrown and is displayed in a message box :

```
PBDOM_DOCUMENT    pbdom_doc1
PBDOM_DOCUMENT    pbdom_get_doc
PBDOM_ELEMENT     pbdom_elem_root
PBDOM_ATTRIBUTE    pbdom_attr
```

```
PBDOM_OBJECT      pbdom_obj

try
    pbdom_doc1 = Create PBDOM_DOCUMENT

    pbdom_doc1.NewDocument("nuskin", &
        "http://www.nuskin.com", "nuskin:root", "", "")
    pbdom_elem_root = pbdom_doc1.GetRootElement()
    pbdom_attr = &
        pbdom_elem_root.GetAttribute("xmlns:nuskin")

catch (PBDOM_EXCEPTION pbdom_except)
    MessageBox ("Exception", "Code : " &
        + string(pbdom_except.GetExceptionCode()) &
        + "~r~nText : " + pbdom_except.Text)
end try
```

Usage For a list of exception codes, see “PBDOM exceptions” on page 259. For a description of the conditions under which each exception can occur, see “PBDOM exception descriptions” on page 260.

See also `GetAttribute Syntax 2 (PBDOM_ELEMENT)`
`GetMessage` and `SetMessage` in the *PowerScript Reference*.

About this chapter

This chapter describes the PBDOM_OBJECT class.

PBDOM_OBJECT

Description

A PBDOM_OBJECT serves as the base class for all the PBDOM classes. It contains all the basic methods required by derived classes. The derived classes of a PBDOM_OBJECT each inherit the base methods of a PBDOM_OBJECT, and additionally contain their own specialized methods.

Methods

PBDOM_OBJECT has the following methods:

- AddContent
- Clone
- Detach
- Equals
- GetContent
- GetOwnerDocumentObject
- GetName
- GetObjectClass
- GetObjectClassString
- GetParentObject
- GetText
- GetTextNormalize
- GetTextTrim
- HasChildren
- InsertContent
- IsAncestorObjectOf
- RemoveContent
- SetContent
- SetName
- SetParentObject

AddContent

Description	Adds a new PBDOM_OBJECT into the current PBDOM_OBJECT.						
Syntax	<i>pbdom_object_name</i> .AddContent(<i>pbdom_object pbdom_object_ref</i>) <table><tr><th>Argument</th><th>Description</th></tr><tr><td><i>pbdom_object_name</i></td><td>The name of the PBDOM_OBJECT</td></tr><tr><td><i>pbdom_object_ref</i></td><td>The PBDOM_OBJECT to add</td></tr></table>	Argument	Description	<i>pbdom_object_name</i>	The name of the PBDOM_OBJECT	<i>pbdom_object_ref</i>	The PBDOM_OBJECT to add
Argument	Description						
<i>pbdom_object_name</i>	The name of the PBDOM_OBJECT						
<i>pbdom_object_ref</i>	The PBDOM_OBJECT to add						
Return value	PBDOM_OBJECT. The return value is the newly modified PBDOM_OBJECT.						
Throws	EXCEPTION_PBDOM_OBJECT_INVALID_FOR_USE – This PBDOM_OBJECT object or the input PBDOM_OBJECT is not associated with a derived PBDOM_OBJECT class object. EXCEPTION_INVALID_ARGUMENT – Input argument is invalid.						
Usage	When a new PBDOM_OBJECT is added to the current one, the new PBDOM_OBJECT becomes a child node of the current PBDOM_OBJECT.						
See also	GetContent InsertContent RemoveContent SetContent						

Clone

Description	Creates a general duplicate of the current PBDOM_OBJECT.						
Syntax	<i>pbdom_object_name</i> .Clone(<i>boolean bDeep</i>) <table><tr><th>Argument</th><th>Description</th></tr><tr><td><i>pbdom_object_name</i></td><td>The name of the PBDOM_OBJECT.</td></tr><tr><td><i>bDeep</i></td><td>A boolean specifying whether a deep or shallow clone is returned. Values are true for a deep clone and false for a shallow clone.</td></tr></table>	Argument	Description	<i>pbdom_object_name</i>	The name of the PBDOM_OBJECT.	<i>bDeep</i>	A boolean specifying whether a deep or shallow clone is returned. Values are true for a deep clone and false for a shallow clone.
Argument	Description						
<i>pbdom_object_name</i>	The name of the PBDOM_OBJECT.						
<i>bDeep</i>	A boolean specifying whether a deep or shallow clone is returned. Values are true for a deep clone and false for a shallow clone.						
Return value	PBDOM_OBJECT. The return value is the clone of the PBDOM_OBJECT.						
Throws	EXCEPTION_PBDOM_OBJECT_INVALID_FOR_USE – This PBDOM_OBJECT object is not associated with a derived PBDOM_OBJECT class object.						

Usage

The Clone method creates a general duplicate of the current PBDOM_OBJECT. If the *bDeep* parameter is true, a deep clone is returned; otherwise, a shallow clone is returned.

A PBDOM_OBJECT clone does not have a parent; however, it resides in the same PBDOM_DOCUMENT as its original. If the original PBDOM_OBJECT is standalone, the clone is also standalone.

If general, if *bDeep* is true, the Clone method recursively clones the subtree under the PBDOM_OBJECT. If *bDeep* is false, the Clone method clones only the PBDOM_OBJECT itself, together with as much information as possible.

Cloning is class specific

Cloning is not uniform across all PBDOM_OBJECT classes. See the documentation for each class for specific information.

Detach

Description

Detaches a PBDOM_OBJECT from its parent.

Syntax

```
pbdom_object_name.Detach()
```

Argument	Description
<i>pbdom_object_name</i>	The name of the PBDOM_OBJECT

Return value

PBDOM_OBJECT.

Throws

EXCEPTION_PBDOM_OBJECT_INVALID_FOR_USE – This PBDOM_OBJECT object is not associated with a derived PBDOM_OBJECT class object.

Examples

This example detaches the root element of a PBDOM_DOCUMENT called *pbdom_doc* from its parent object—that is, from the PBDOM_DOCUMENT itself. Then, it attempts to obtain the parent PBDOM_OBJECT and tests whether it is null using the *IsValid* method:

```
pbdom_obj = pbdom_doc.GetRootElement()
pbdom_obj.Detach()
pbdom_parent_obj = pbdom_obj.GetParentObject()
if (not IsValid(pbdom_parent_obj)) then
    MessageBox ("Invalid", "Root Element has no
Parent")
end if
```

Usage

If the PBDOM_OBJECT has no parent, this method does nothing.

Equals

Description	Tests for the equality of a referenced PBDOM_OBJECT.						
Syntax	<div><i>pbdom_object_name</i>.Equals(<i>pbdom_object pbdom_object_ref</i>)</div> <table><tr><th>Argument</th><th>Description</th></tr><tr><td><i>pbdom_object_name</i></td><td>The name of the PBDOM_OBJECT</td></tr><tr><td><i>pbdom_object_ref</i></td><td>The PBDOM_OBJECT to test for equality with the current PBDOM_OBJECT</td></tr></table>	Argument	Description	<i>pbdom_object_name</i>	The name of the PBDOM_OBJECT	<i>pbdom_object_ref</i>	The PBDOM_OBJECT to test for equality with the current PBDOM_OBJECT
Argument	Description						
<i>pbdom_object_name</i>	The name of the PBDOM_OBJECT						
<i>pbdom_object_ref</i>	The PBDOM_OBJECT to test for equality with the current PBDOM_OBJECT						
Return value	Boolean. Returns true if the current PBDOM_OBJECT is equivalent to the input PBDOM_OBJECT, and false otherwise.						
Throws	<p>EXCEPTION_PBDOM_OBJECT_INVALID_FOR_USE – This PBDOM_OBJECT object or the input PBDOM_OBJECT is not associated with a derived PBDOM_OBJECT class object.</p> <p>EXCEPTION_INVALID_ARGUMENT – The input PBDOM_OBJECT is invalid. This can happen if the object has not been initialized properly or is a null object reference.</p>						

GetContent

Description	Obtains an array of PBDOM_OBJECT objects, each of which is a child node of the called PBDOM_OBJECT.						
Syntax	<div><i>pbdom_object_name</i>.GetContent(<i>ref pbdom_object pbdom_object_array[]</i>)</div> <table><tr><th>Argument</th><th>Description</th></tr><tr><td><i>pbdom_object_name</i></td><td>The name of the PBDOM_OBJECT</td></tr><tr><td><i>pbdom_object_array</i></td><td>A reference to an array of PBDOM_OBJECT objects that will receive the PBDOM_OBJECT objects</td></tr></table>	Argument	Description	<i>pbdom_object_name</i>	The name of the PBDOM_OBJECT	<i>pbdom_object_array</i>	A reference to an array of PBDOM_OBJECT objects that will receive the PBDOM_OBJECT objects
Argument	Description						
<i>pbdom_object_name</i>	The name of the PBDOM_OBJECT						
<i>pbdom_object_array</i>	A reference to an array of PBDOM_OBJECT objects that will receive the PBDOM_OBJECT objects						
Return value	Boolean. Returns true for success, and false otherwise.						
Throws	EXCEPTION_PBDOM_OBJECT_INVALID_FOR_USE – This PBDOM_OBJECT object is not associated with a derived PBDOM_OBJECT class object.						
Usage	The returned array is passed by reference, with items in the same order in which they appear in the PBDOM_OBJECT. Any changes to any item of the array affect the actual item to which it refers.						

See also AddContent
 InsertContent
 RemoveContent
 SetContent

GetName

Description Obtains the name of the current PBDOM_OBJECT. The returned string depends on the type of DOM Object that is contained within a PBDOM_OBJECT.

Syntax *pbdom_object_name*.GetName()

Argument	Description
<i>pbdom_object_name</i>	The name of the PBDOM_OBJECT

Return value The following table lists the return values, based on the type of DOM Object contained within the PBDOM_OBJECT:

DOM Object Type	Return Value
PBDOM_DOCTYPE	"#document"
PBDOM_ELEMENT	<p>The local tag name of the element, without any namespace prefixes.</p> <p>For example, if the element is: <abc>Value</abc>, then the string returned from GetName is "abc".</p> <p>Also, if the tag name of the element contains a namespace prefix, the prefix is not included in the returned string.</p> <p>For example, if the element is: <MyMusic:CD xmlns:MyMusic="http://www.MyMusicDiscs.com"/>, then the string returned from GetName is "CD".</p>

DOM Object Type	Return Value
PBDOM_ATTRIBUTE	<p>The local name of the attribute itself, without a namespace.</p> <p>For example, if the element with the attribute is: <abc ATTRIBUTE_1="My Attribute">, then GetName returns "ATTRIBUTE_1".</p> <p>If the name of the attribute contains a namespace prefix, then the prefix is not included in the returned string.</p> <p>For example, if the element with an attribute is: <MyMusic:CD xmlns:MyMusic="http://www.MyMusicDiscs.com" MyMusic:Type="Jazz"/>, then GetName returns the string "Type".</p>
PBDOM_CDATA	"#cdata-section"
PBDOM_COMMENT	"#comment"
PBDOM_DOCTYPE	<p>The name that was given to the doctype object itself.</p> <p>For example, if the DOCTYPE declaration is: <!DOCTYPE d_grid_object >, then GetName returns "d_grid_object".</p>
PBDOM_PROCESSINGINSTRUCTION	<p>The name that was given to the processing instruction itself.</p> <p>For example, if the processing instruction definition is: <?works document="hello.doc" data="hello.wks" ?>, then GetName returns "works".</p>
PBDOM_TEXT	"#text"

Throws	<p>EXCEPTION_PBDOM_OBJECT_INVALID_FOR_USE – If this PBDOM_OBJECT is not a reference to an object derived from PBDOM_OBJECT.</p> <p>EXCEPTION_MEMORY_ALLOCATION_FAILURE – Insufficient memory was encountered while executing this method.</p>
Usage	A PBDOM_OBJECT cannot be instantiated directly.
See also	SetName

GetObjectClass

Description Returns a long integer code that indicates the class of this PBDOM_OBJECT.

Syntax *pbdom_object_name*.GetObjectClass()

Argument	Description
<i>pbdom_object_name</i>	The name of the PBDOM_OBJECT

Return value Long. A code that indicates the class of the current PBDOM_OBJECT.

Usage This method returns the following possible values:

Class	Long integer value
UNKNOWN (indicates an error)	0
PBDOM_OBJECT (the base class)	1
PBDOM_DOCUMENT	2
PBDOM_ELEMENT	3
PBDOM_DOCTYPE	4
PBDOM_ATTRIBUTE	5
PBDOM_CHARACTERDATA	6
PBDOM_TEXT	7
PBDOM_CDATA	8
PBDOM_COMMENT	9
PBDOM_PROCESSINGINSTRUCTION	10
PBDOM_ENTITYREFERENCE	11

See also GetObjectClassString

GetObjectClassString

Description Returns a string form of the class of the PBDOM_OBJECT.

Syntax *pbdom_object_name*.GetObjectClassString()

Argument	Description
<i>pbdom_object_name</i>	The name of the PBDOM_OBJECT

Return value String. A string that indicates the class of the current PBDOM_OBJECT.

Usage This method returns the following possible values:

Class	String returned
PBDOM_OBJECT	pbdom_object
PBDOM_DOCUMENT	pbdom_document
PBDOM_ELEMENT	pbdom_element
PBDOM_ENTITYREFERENCE	pbdom_entityreference
PBDOM_DOCTYPE	pbdom_doctype
PBDOM_ATTRIBUTE	pbdom_attribute
PBDOM_CHARACTERDATA	pbdom_characterdata
PBDOM_TEXT	pbdom_text
PBDOM_CDATA	pbdom_cdata
PBDOM_COMMENT	pbdom_comment
PBDOM_PROCESSINGINSTRUCTION	pbdom_processinginstruction

See also GetObjectClass

GetOwnerDocumentObject

Description Returns the owning PBDOM_DOCUMENT of the current PBDOM_OBJECT.

Syntax *pbdom_object_name*.GetOwnerDocumentObject()

Argument	Description
<i>pbdom_object_name</i>	The name of the PBDOM_OBJECT

Return value PBDOM_DOCUMENT.

Throws EXCEPTION_PBDOM_OBJECT_INVALID_FOR_USE – This PBDOM_OBJECT object is not associated with a derived PBDOM_OBJECT class object.

EXCEPTION_MEMORY_ALLOCATION_FAILURE – Insufficient memory was encountered while executing this method.

Usage The owning PBDOM_DOCUMENT of the current PBDOM_OBJECT is null if PBDOM_OBJECT is not owned by any PBDOM_DOCUMENT, or if the current PBDOM_OBJECT is itself a PBDOM_DOCUMENT object.

See also GetParentObject
SetParentObject

GetParentObject

Description	Returns the parent PBDOM_OBJECT of the current PBDOM_OBJECT.				
Syntax	<i>pbdom_object_name</i> .GetParentObject() <table> <tr> <th>Argument</th><th>Description</th></tr> <tr> <td><i>pbdom_object_name</i></td><td>The name of the PBDOM_OBJECT</td></tr> </table>	Argument	Description	<i>pbdom_object_name</i>	The name of the PBDOM_OBJECT
Argument	Description				
<i>pbdom_object_name</i>	The name of the PBDOM_OBJECT				
Return value	PBDOM_OBJECT.				
Throws	EXCEPTION_PBDOM_OBJECT_INVALID_FOR_USE – This PBDOM_OBJECT object is not associated with a derived PBDOM_OBJECT class object. EXCEPTION_MEMORY_ALLOCATION_FAILURE – Insufficient memory was encountered while executing this method.				
Examples	<p>Using the GetRootElement method, the root element of a PBDOM_DOCUMENT called pbdom_doc is returned into a PBDOM_OBJECT called pbdom_obj. The GetParentObject method returns the parent of the root element, which is the PBDOM_DOCUMENT itself, and stores it in pbdom_parent_obj.</p> <p>The GetObjectClassString method returns the class name of pbdom_parent_obj as a string that is displayed in a message box:</p> <pre> pbdom_document pbdom_doc pbdom_object pbdom_obj pbdom_object pbdom_parent_obj string strClassName // code omitted ... pbdom_doc = pbdombuilder_new.BuildFromString (strXML) pbdom_obj = pbdom_doc.GetRootElement() pbdom_parent_obj = pbdom_obj.GetParentObject() strClassName = pbdom_parent_obj.GetObjectClassString() MessageBox ("Parent Class Name", strClassName) </pre>				
Usage	If the PBDOM_OBJECT has no parent, null is returned.				
See also	GetOwnerDocumentObject SetParentObject				

GetText

Description Obtains the text data that is contained within the current PBDOM_OBJECT.

Syntax *pbdom_object_name*.GetText()

Argument	Description
<i>pbdom_object_name</i>	The name of the PBDOM_OBJECT

Return value String.

The following table lists the return values, based on the type of DOM Object contained within a PBDOM_OBJECT:

DOM Object Type	Return Value
PBDOM_ELEMENT	<p>The concatenation of the text values of all the TEXT nodes contained within the PBDOM_ELEMENT.</p> <p>If the PBDOM_ELEMENT definition is <abc>Root Element Data<data>ABC Data </data> now with extra info </abc>, then GetText returns “Root Element Data now with extra info”.</p> <hr/> <p>Extra Spaces There are extra spaces between the word “Data” and “now” and again after the word “info”. They are there because they originally exist in the text.</p> <hr/> <p>If the PBDOM_ELEMENT definition is: <abc>Root Element Data</abc>, then GetText returns “Root Element Data”.</p>
PBDOM_ATTRIBUTE	<p>The text data contained within the PBDOM_ATTRIBUTE object.</p> <p>If the element with an attribute is <abc ATTRIBUTE_1="My Attribute">, then GetText returns “My Attribute”.</p>
PBDOM_TEXT	<p>The text data contained within the PBDOM_TEXT object itself.</p> <p>For example, suppose there is the following element:</p> <p><abc>MY TEXT</abc></p> <p>If there is a PBDOM_TEXT object to represent the text node “MY TEXT”, then calling GetText on the PBDOM_TEXT returns the string “MY TEXT”</p>

DOM Object Type	Return Value
PBDOM_CDATA	<p>The string data that is contained within the CDATA section itself. For example, suppose there is the following CDATA:</p> <pre><![CDATA[They're saying "x < y" & that "z > y" so I guess that means that z > x]]></pre> <p>If there is a PBDOM_CDATA to represent the above CDATA section, then calling GetText on it returns the following string:</p> <pre>They're saying "x < y" & that "z > y" so I guess that means that z > x</pre>
PBDOM_COMMENT	<p>The string data that is contained within the COMMENT itself. For example, suppose there is the following COMMENT:</p> <pre><!--This is some comment. --></pre> <p>If there is a PBDOM_COMMENT to represent the above COMMENT, then calling GetText on it returns the following string:</p> <pre>This is some comment.</pre>

Throws

EXCEPTION_PBDOM_OBJECT_INVALID_FOR_USE – This PBDOM_OBJECT object is not associated with a derived PBDOM_OBJECT class object.

EXCEPTION_MEMORY_ALLOCATION_FAILURE – Insufficient memory was encountered while executing this method.

Usage

This method returns meaningful data only if the PBDOM_OBJECT is of a type that can contain text nodes, CDATA sections, or basic text. These include:

- PBDOM_ELEMENT
- PBDOM_ATTRIBUTE
- PBDOM_TEXT
- PBDOM_CDATA
- PBDOM_COMMENT

The PBDOM_TEXT, PBDOM_CDATA, and PBDOM_COMMENT objects are special cases that cause the GetText method to return the text data that is intrinsically contained within the objects. A PBDOM_TEXT object is basically a DOM text node and therefore does not hold any child text nodes. A PBDOM_CDATA object represents a DOM CDATA object, and therefore does not hold any child DOM nodes. The same rule applies to a PBDOM_COMMENT object.

See also GetTextNormalize
 GetTextTrim

GetTextNormalize

Description Gets the text data that is contained in the current PBDOM_OBJECT with all surrounding whitespace characters removed and internal whitespace characters normalized to a single space.

Syntax *pbdom_object_name*.GetTextNormalize()

Argument	Description
<i>pbdom_object_name</i>	The name of the PBDOM_OBJECT

Return value String. The normalized text content of the current PBDOM_OBJECT, or an empty string if there is no text content.

Throws EXCEPTION_PBDOM_OBJECT_INVALID_FOR_USE – This PBDOM_OBJECT object is not associated with a derived PBDOM_OBJECT class object.

EXCEPTION_MEMORY_ALLOCATION_FAILURE – Insufficient memory was encountered while executing this method.

Usage This method returns meaningful data only if the PBDOM_OBJECT is of a type that can contain text nodes or CDATA sections, or of a type that intrinsically contains basic text. These types are:

- PBDOM_ELEMENT
- PBDOM_ATTRIBUTE
- PBDOM_TEXT
- PBDOM_CDATA
- PBDOM_COMMENT

The PBDOM_TEXT, PBDOM_CDATA, and PBDOM_COMMENT classes are special cases that cause the GetTextNormalize method to return the intrinsic text data contained within their instances. A PBDOM_TEXT object represents a DOM text node, therefore it does not hold any child DOM Nodes.

PBDOM_CDATA object is a representation of a DOM CDATA object and does not hold any child DOM Nodes. Nor does PBDOM_COMMENT contain any child DOM Nodes.

The following table lists the return values based on the type of actual DOM Object contained within PBDOM_OBJECT:

DOM Object Type	Return Value
PBDOM_ELEMENT	<p>The normalized text of the concatenation of the text values of all the TEXT Nodes and CDATA Sections contained within the PBDOM_ELEMENT.</p> <p>Suppose there is a PBDOM_ELEMENT defined as follows:</p> <pre><abc> Root Element Data <data>ABC Data </data> now with extra info </abc></pre> <p>GetTextNormalize returns Root Element Data now with extra info.</p> <p>Suppose there is a PBDOM_ELEMENT defined as follows:</p> <pre><abc> Root Element Data </abc></pre> <p>GetTextNormalize returns Root Element Data.</p> <p>Suppose there is a PBDOM_ELEMENT defined as follows:</p> <pre><abc> Root Element Data <![CDATA[with some cdata text]]></abc></pre> <p>GetTextNormalize returns "Root Element Data with some cdata text".</p>
PBDOM_ATTRIBUTE	<p>The normalized text data contained within the PBDOM_ATTRIBUTE object.</p> <p>Suppose there is an element with an attribute as follows:</p> <pre><abc ATTRIBUTE_1=" My Attribute "></pre> <p>GetTextNormalize returns My Attribute.</p>
PBDOM_TEXT	<p>The normalized text data contained within the PBDOM_TEXT object itself.</p> <p>For example, suppose there is the following element:</p> <pre><abc> MY TEXT </abc></pre> <p>If there is a PBDOM_TEXT object to represent the text node "MY TEXT", then calling GetTextNormalize on the PBDOM_TEXT returns the string MY TEXT.</p>

DOM Object Type	Return Value
PBDOM_CDATA	<p>The normalized string data that is contained within the CDATA section itself. For example, suppose there is the following CDATA:</p> <pre><![CDATA[They're saying "x < y" & that "z > y" so I guess that means that z > x]]></pre> <p>If there is a PBDOM_CDATA to represent the above CDATA section, then calling GetTextNormalize on it returns the string:</p> <pre>They're saying " x < y " & that "z > y" so I guess that means that z > x</pre> <p>Note that the initial spaces before “They’re” and the trailing space after the last “x” have been removed. Additionally, the spaces between the word “guess” and “that” have been reduced to just one space.</p>
PBDOM_COMMENT	<p>The normalized string data that is contained within the COMMENT itself. For example, suppose there is the following COMMENT:</p> <pre><!-- Comment Here !--></pre> <p>Calling GetTextNormalize on the COMMENT returns the string <code>Comment Here !</code></p>

See also GetText
 GetTextTrim

GetTextTrim

Description	Gets the text data that is contained in the current PBDOM_OBJECT with all surrounding whitespace characters removed.					
Syntax	<i>pbdom_object_name</i> .GetTextTrim()					
	<table><tr><th>Argument</th><th>Description</th></tr><tr><td><i>pbdom_object_name</i></td><td>The name of the PBDOM_OBJECT</td></tr></table>	Argument	Description	<i>pbdom_object_name</i>	The name of the PBDOM_OBJECT	
Argument	Description					
<i>pbdom_object_name</i>	The name of the PBDOM_OBJECT					
Return value	String. The trimmed text content of the current PBDOM_OBJECT, or an empty string if there is no text content or only whitespace characters.					
Throws	EXCEPTION_PBDOM_OBJECT_INVALID_FOR_USE – This PBDOM_OBJECT object is not associated with a derived PBDOM_OBJECT class object. EXCEPTION_MEMORY_ALLOCATION_FAILURE – Insufficient memory was encountered while executing this method.					

Usage

This method returns meaningful data only if the PBDOM_OBJECT is of a type that can contain TEXT NODEs or CDATA Sections, or of a type that intrinsically contains basic text. These types are:

- PBDOM_ELEMENT
- PBDOM_ATTRIBUTE
- PBDOM_TEXT
- PBDOM_CDATA
- PBDOM_COMMENT

The PBDOM_TEXT, PBDOM_CDATA, and PBDOM_COMMENT classes are special cases that cause the GetTextTrim method to return the intrinsic text data contained within their instances. A PBDOM_TEXT object represents a DOM text node, so it does not hold any child DOM Nodes. PBDOM_CDATA object is a representation of a DOM CDATA object and does not hold any child DOM Nodes, nor does PBDOM_COMMENT contain any child DOM Nodes.

The following table lists the return values based on the type of actual DOM Object contained within PBDOM_OBJECT:

DOM Object Type	Return Value
PBDOM_ELEMENT	<p>The trimmed concatenation of the text values of all the TEXT Nodes and CDATA Sections contained within the PBDOM_ELEMENT. Surrounding whitespace characters are removed.</p> <p>Suppose there is a PBDOM_ELEMENT defined as follows:</p> <pre><abc> Root Element Data<data>ABC Data </data> now with extra info </abc></pre> <p>GetTextTrim returns Root Element Data now with extra info.</p> <p>Suppose there is a PBDOM_ELEMENT defined as follows:</p> <pre><abc> Root Element Data </abc></pre> <p>GetTextTrim returns Root Element Data.</p> <p>Suppose there is a PBDOM_ELEMENT defined as follows:</p> <pre><abc>Root Element Data <![CDATA[with some cdata text]]></abc></pre> <p>GetTextTrim returns Root Element Data with some cdata text.</p>

DOM Object Type	Return Value
PBDOM_ATTRIBUTE	<p>The trimmed text data contained within the PBDOM_ATTRIBUTE object with surrounding whitespace characters removed.</p> <p>Suppose there is an element with an attribute as follows:</p> <pre><abc ATTRIBUTE_1="My Attribute "></pre> <p>GetTextTrim returns:</p> <pre>My Attribute</pre> <p>Note, however, that the spaces between “My” and “Attribute” are still present.</p>
PBDOM_TEXT	<p>The trimmed text data contained within the PBDOM_TEXT object itself with surrounding whitespace characters removed.</p> <p>For example, suppose there is the following element:</p> <pre><abc> MY TEXT </abc></pre> <p>If there is a PBDOM_TEXT object to represent the text node “MY TEXT”, then calling GetTextTrim on the PBDOM_TEXT returns the string MY TEXT.</p>
PBDOM_CDATA	<p>The trimmed string data that is contained within the CDATA section itself with surrounding whitespace characters removed. For example, suppose there is the following CDATA:</p> <pre><![CDATA[They’re saying "x < y" & that "z > y" so I guess that means that z > x]]></pre> <p>If there is a PBDOM_CDATA to represent the above CDATA section, then calling GetTextTrim on it returns the string:</p> <pre>They’re saying " x < y " & that "z > y" so I guess that means that z > x</pre> <p>Note that the initial spaces before “They’re” and the trailing space after the last “x” have been removed.</p>
PBDOM_COMMENT	<p>The trimmed string data that is contained within the COMMENT itself. For example, suppose there is the following COMMENT:</p> <pre><!-- Comment Here ! --></pre> <p>Note the spaces before the word “Comment” and after the exclamation mark “!”. Calling GetTextTrim on the COMMENT returns the string Comment Here !</p>

See also

GetText
GetTextNormalize

HasChildren

Description Determines whether the PBDOM_OBJECT has any child objects.

Syntax *pbdom_object_name*.HasChildren()

Argument	Description
<i>pbdom_object_name</i>	The name of the PBDOM_OBJECT

Return value Boolean. Returns true if the current PBDOM_OBJECT has at least one child PBDOM_OBJECT, and false if it has none.

Throws EXCEPTION_PBDOM_OBJECT_INVALID_FOR_USE – This PBDOM_OBJECT object is not associated with a derived PBDOM_OBJECT class object.

Examples In the following example, a PBDOM_DOCUMENT is created from a simple XML string. The root element abc has a child text node that encapsulates the text “abc data”. Calling HasChildren on the root element returns true. The message box displays Has Children. If the method returns false, the message box displays Has No Children

```
PBDOM_Builder pbdombuilder_new
pbdom_document pbdom_doc
pbdom_object pbdom_root_element
string strXML = "<abc>abc data</abc>"

pbdombuilder_new = Create PBDOM_Builder
pbdom_doc = pbdombuilder_new.BuildFromString (strXML)
pbdom_root_element = pbdom_doc.GetRootElement()
if (pbdom_root_element.HasChildren()) then
    MessageBox ("pbdom_root_element", "Has Children")
else
    MessageBox ("pbdom_root_element", "Has No
Children")
end if
Destroy pbdombuilder_new
```

Usage True is returned if the PBDOM_OBJECT has at least one child, and false if there are no children.

InsertContent

Description	Inserts a new PBDOM_OBJECT into the current PBDOM_OBJECT.								
Syntax	<i>pbdom_object_name</i> .InsertContent(<i>pbdom_object_new</i> , <i>pbdom_object_ref</i>) <table><tr><th>Argument</th><th>Description</th></tr><tr><td><i>pbdom_object_name</i></td><td>The name of the PBDOM_OBJECT</td></tr><tr><td><i>pbdom_object_new</i></td><td>The referenced name of a PBDOM_OBJECT you want to insert</td></tr><tr><td><i>pbdom_object_ref</i></td><td>The name of the PBDOM_OBJECT in front of which you want to insert the new PBDOM_OBJECT</td></tr></table>	Argument	Description	<i>pbdom_object_name</i>	The name of the PBDOM_OBJECT	<i>pbdom_object_new</i>	The referenced name of a PBDOM_OBJECT you want to insert	<i>pbdom_object_ref</i>	The name of the PBDOM_OBJECT in front of which you want to insert the new PBDOM_OBJECT
Argument	Description								
<i>pbdom_object_name</i>	The name of the PBDOM_OBJECT								
<i>pbdom_object_new</i>	The referenced name of a PBDOM_OBJECT you want to insert								
<i>pbdom_object_ref</i>	The name of the PBDOM_OBJECT in front of which you want to insert the new PBDOM_OBJECT								
Return value	PBDOM_OBJECT. The return value is the newly modified PBDOM_OBJECT.								
Throws	<p>EXCEPTION_PBDOM_OBJECT_INVALID_FOR_USE – This PBDOM_OBJECT object or the new PBDOM_OBJECT or the reference PBDOM_OBJECT is not associated with a derived PBDOM_OBJECT class object.</p> <p>EXCEPTION_INVALID_ARGUMENT – One of the input arguments is invalid. This can happen if the input argument has not been initialized properly or is a null object reference.</p>								
Usage	<p>When a new PBDOM_OBJECT is inserted into the current PBDOM_OBJECT, the new PBDOM_OBJECT becomes a child node of the current PBDOM_OBJECT. Also, the new PBDOM_OBJECT is to be positioned specifically before another PBDOM_OBJECT, designated using the second parameter.</p> <p>If the second PBDOM_OBJECT is specified as null, then the new PBDOM_OBJECT is to be inserted at the end of the list of children of the current PBDOM_OBJECT.</p> <hr/> <p>Derived Classes Methods of classes that derive from the PBDOM_OBJECT class return trivial results when the derived classes can have no child objects and when the methods concern manipulation of child-node content.</p> <hr/>								
See also	AddContent GetContent RemoveContent SetContent								

IsAncestorObjectOf

Description	Determines whether the current PBDOM_OBJECT is the ancestor of another PBDOM_OBJECT.						
Syntax	<i>pbdom_object_name.IsAncestorObjectOf(pbdom_object_ref)</i>						
	<table> <tr> <th>Argument</th><th>Description</th></tr> <tr> <td><i>pbdom_object_name</i></td><td>The name of the PBDOM_OBJECT</td></tr> <tr> <td><i>pbdom_object_ref</i></td><td>The PBDOM_OBJECT to check against</td></tr> </table>	Argument	Description	<i>pbdom_object_name</i>	The name of the PBDOM_OBJECT	<i>pbdom_object_ref</i>	The PBDOM_OBJECT to check against
Argument	Description						
<i>pbdom_object_name</i>	The name of the PBDOM_OBJECT						
<i>pbdom_object_ref</i>	The PBDOM_OBJECT to check against						
Return value	Boolean. Returns true if the current PBDOM_OBJECT is the ancestor of the referenced PBDOM_OBJECT, and false otherwise.						
Throws	<p>EXCEPTION_PBDOM_OBJECT_INVALID_FOR_USE – This PBDOM_OBJECT object is not associated with a derived PBDOM_OBJECT class object.</p> <p>EXCEPTION_INVALID_ARGUMENT – The input PBDOM_OBJECT is invalid. This can happen if it has not been initialized properly or it is a null object reference.</p>						
Examples	<p>The following code fragment uses the IsAncestorObjectOf method and creates a structured document. In the fragment, pbdom_elem_1 represents the pbdom_elem_1 element. Because it is an ancestor of pbdom_elem_3, which represents the pbdom_elem_ element, the call to IsAncestorObjectOf returns true.</p>						

```

PBDOM_ELEMENT pbdom_elem_1
PBDOM_ELEMENT pbdom_elem_2
PBDOM_ELEMENT pbdom_elem_3
PBDOM_ELEMENT pbdom_elem_root
PBDOM_DOCUMENT pbdom_doc1

pbdom_doc1 = Create PBDOM_DOCUMENT
pbdom_elem_1 = Create PBDOM_ELEMENT
pbdom_elem_2 = Create PBDOM_ELEMENT
pbdom_elem_3 = Create PBDOM_ELEMENT

pbdom_elem_1.SetName("pbdom_elem_1")
pbdom_elem_2.SetName("pbdom_elem_2")
pbdom_elem_3.SetName("pbdom_elem_3")

pbdom_elem_1.AddContent(pbdom_elem_2)
pbdom_elem_2.AddContent(pbdom_elem_3)

```

```
pbdom_doc1.NewDocument ("", "", &
    "Root_Element_From_Doc_1" , "", "")
pbdom_elem_root = pbdom_doc1.GetRootElement()
pbdom_elem_root.AddContent (pbdom_elem_1)

IF (pbdom_elem_1.IsAncestorObjectOf (pbdom_elem_3))
THEN
    MessageBox ("Ancestry", &
        "pbdom_elem_1 Is The Ancestor Of pbdom_elem_3")
ELSE
    MessageBox ("Ancestry", &
        "pbdom_elem_1 Is NOT The Ancestor Of pbdom_elem_3")

END IF

destroy pbdom_elem_1
destroy pbdom_elem_2
destroy pbdom_elem_3
destroy pbdom_elem_root
destroy pbdom_doc1
```

The preceding code fragment creates the following document:

```
<!DOCTYPE Root_Element_From_Doc_1>
<Root_Element_From_Doc_1>
  <pbdom_elem_1>
    <pbdom_elem_2>
      <pbdom_elem_3 />
    </pbdom_elem_2>
  </pbdom_elem_1>
</Root_Element_From_Doc_1>
```

Usage

The IsAncestorObjectOf method determines whether the current PBDOM_OBJECT is the ancestor of another PBDOM_OBJECT.

RemoveContent

Description

Removes a child PBDOM_OBJECT from the current PBDOM_OBJECT.

Syntax

```
pbdom_object_name.RemoveContent(pbdom_object_ref)
```

Argument	Description
pbdom_object_name	The name of the PBDOM_OBJECT
pbdom_object_ref	The PBDOM_OBJECT to remove

Return value

Boolean. Returns true if the content was removed, and false otherwise.

Throws	<p>EXCEPTION_PBDOM_OBJECT_INVALID_FOR_USE – This PBDOM_OBJECT object or the input PBDOM_OBJECT is not associated with a derived PBDOM_OBJECT class object.</p> <p>EXCEPTION_INVALID_ARGUMENT – The input PBDOM_OBJECT to be removed is invalid. This can happen if this object has not been initialized properly or is a null object reference.</p>
Usage	When a new PBDOM_OBJECT is removed from the current one, all children under the removed PBDOM_OBJECT are also removed.
See also	<p>AddContent</p> <p>GetContent</p> <p>InsertContent</p> <p>SetContent</p>

SetContent

Description	Sets the entire content of the PBDOM_OBJECT.						
Syntax	<p><i>pbdom_object_name</i>.SetContent(<i>pbdom_object</i><i>pbdom_object_array</i>)</p> <table> <tr> <th>Argument</th><th>Description</th></tr> <tr> <td><i>pbdom_object_name</i></td><td>The name of the PBDOM object</td></tr> <tr> <td><i>pbdom_object_array</i></td><td>An array of PBDOM_OBJECT objects to be set as the contents of the PBDOM_OBJECT</td></tr> </table>	Argument	Description	<i>pbdom_object_name</i>	The name of the PBDOM object	<i>pbdom_object_array</i>	An array of PBDOM_OBJECT objects to be set as the contents of the PBDOM_OBJECT
Argument	Description						
<i>pbdom_object_name</i>	The name of the PBDOM object						
<i>pbdom_object_array</i>	An array of PBDOM_OBJECT objects to be set as the contents of the PBDOM_OBJECT						
Return value	PBDOM_OBJECT. Returns the newly modified PBDOM_OBJECT.						
Throws	EXCEPTION_PBDOM_OBJECT_INVALID_FOR_USE – This PBDOM_OBJECT object is not associated with a derived PBDOM_OBJECT class object.						
Usage	<p>The supplied array contains PBDOM_OBJECT objects that are legal for the particular derived PBDOM_OBJECT that is associated with this PBDOM_OBJECT.</p> <p>For example, a PBDOM_DOCUMENT accepts only an array that contains PBDOM_ELEMENT, PBDOM_COMMENT, PBDOM_DOCTYPE, or PBDOM_PROCESSINGINSTRUCTION objects. In addition, the array can contain only one PBDOM_ELEMENT object that it sets as its root element, and only one PBDOM_DOCTYPE object that is set as its DOCTYPE.</p> <p>If illegal objects are included in the array, exceptions (specific to the particular derived PBDOM_OBJECT) are thrown. For more details, please refer to the SetContent method of the objects derived from PBDOM_OBJECT.</p>						

In the event of an exception, the original contents of this PBDOM_OBJECT are unchanged, and the PBDOM_OBJECT objects contained in the supplied array are unaltered.

See also AddContent
 GetContent
 InsertContent
 RemoveContent

SetName

Description Sets the name of the PBDOM_OBJECT.

Syntax *pbdom_object_name*.SetName(*stringstrName*)

Argument	Description
<i>pbdom_object_name</i>	The name of the PBDOM_OBJECT
<i>strName</i>	The new name you want to set for PBDOM_OBJECT

Return value Boolean. Returns true if the name of the PBDOM_OBJECT was changed, and false otherwise.

Throws EXCEPTION_PBDOM_OBJECT_INVALID_FOR_USE – This PBDOM_OBJECT object is not associated with a derived PBDOM_OBJECT class object.

 EXCEPTION_INVALID_ARGUMENT – Input name string is invalid. This can happen if the string has been specifically set to null.

 EXCEPTION_MEMORY_ALLOCATION_FAILURE – Insufficient memory was encountered while executing this method.

 EXCEPTION_INVALID_NAME – The input name string does not conform to the W3C standards for XML names.

Usage This name refers to the name of the particular derived PBDOM_OBJECT to which this PBDOM_OBJECT refers. Certain types of PBDOM_OBJECT do not have any name associated with them. See the description of GetName.

 For example, PBDOM_DOCUMENT does not have any name, so calling the SetName method returns false.

See also GetName

SetParentObject

Description Sets the referenced PBDOM_OBJECT as the parent of the current PBDOM_OBJECT.

Syntax *pbdom_object_name*.SetParentObject(*pbdom_object pbdom_object_ref*)

Argument	Description
<i>pbdom_object_name</i>	The name of the PBDOM_OBJECT
<i>pbdom_object_ref</i>	The PBDOM_OBJECT to be set as the parent of the current PBDOM_OBJECT

Return value PBDOM_OBJECT. The current PBDOM_OBJECT is appended as a child node of the referenced parent.

Throws EXCEPTION_PBDOM_OBJECT_INVALID_FOR_USE – This PBDOM_OBJECT object or the input PBDOM_OBJECT is not associated with a derived PBDOM_OBJECT class object.

EXCEPTION_INVALID_ARGUMENT – The input PBDOM_OBJECT is invalid. This can happen if it has not been initialized properly, or if it is a null object reference.

EXCEPTION_PBDOM_OBJECT_ALREADY_HAS_PARENT – The current PBDOM_OBJECT already has a parent.

EXCEPTION_INAPPROPRIATE_USE_OF_PBDOM_OBJECT – If the input PBDOM_OBJECT is of a class that cannot have a legal parent-child relationship with this PBDOM_OBJECT.

Examples In the following code example, a PBDOM_ELEMENT object is created and called *pbdom_elem_1*. Its parent is set to be the root element of the PBDOM_DOCUMENT called *pbdom_doc*. Once this is done, *pbdom_elem_1* is immediately transferred to the *pbdom_doc* document and *pbdom_elem_1* is immediately appended as a child node of the root element of *pbdom_doc*.

The following method call returns the string “*pbdom_element*”, because the root element is a PBDOM_ELEMENT:

```
pbdom_elem_1.GetParentObject().GetObjectClassString()
```

The following method call returns the string “*Root_Element*”, which is the name of the root element:

```
pbdom_elem_1.GetParentObject().GetName()
```

Here is the complete example:

```
PBDOM_ELEMENT pbdom_elem_1
PBDOM_ELEMENT pbdom_elem_root
PBDOM_DOCUMENT pbdom_doc1

pbdom_doc1 = Create PBDOM_DOCUMENT
pbdom_elem_1 = Create PBDOM_ELEMENT
pbdom_elem_1.SetName ("pbdom_elem_1")

pbdom_doc1.NewDocument ("", "", "Root_Element", "", "")
pbdom_elem_root = pbdom_doc1.GetRootElement()
pbdom_elem_1.SetParentObject(pbdom_elem_root)

MessageBox ("Parent Class", &
    pbdom_elem_1.GetParentObject(). &
    GetObjectClassString())
MessageBox ("Parent Name", &
    pbdom_elem_1.GetParentObject().GetName())

destroy pbdom_elem_1
destroy pbdom_elem_root
destroy pbdom_doc1
```

Usage

The caller is responsible for ensuring that the current PBDOM_OBJECT and the referenced PBDOM_OBJECT can have a legal parent-child relationship. The caller is also responsible for making sure pre-existing parentage is legal.

The PBDOM SetParentObject method differs from the JDOM SetParent method in that JDOM defines a setParent method for several specific classes, including Element, Comment, and CDATA. PBDOM implements the SetParentObject method in the base PBDOM_OBJECT class to allow polymorphism.

See the SetParentObject documentation of derived PBDOM_OBJECT classes for more details on implementation of specific classes.

See also

GetOwnerDocumentObject
GetParentObject

PBDOM_PROCESSINGINSTRUCTION Class

About this chapter

This chapter describes the PBDOM_PROCESSINGINSTRUCTION class.

PBDOM_PROCESSINGINSTRUCTION

Description

The PBDOM_PROCESSINGINSTRUCTION class defines behavior for an XML processing instruction. Methods allow you to obtain the target of the processing instruction object as well as its data. You can always access the data as a string, and, where appropriate, as name/value pairs.

Note that the actual processing instruction of a processing instruction object is a string, even if the instruction is divided into separate name="value" pairs. PBDOM does support such a processing instruction object format. If the processing instruction object data does contain pairs, as is commonly the case, then PBDOM_PROCESSINGINSTRUCTION parses them into an internal list of name/value pairs.

Methods

Some of the inherited methods from PBDOM_OBJECT serve no meaningful objective, and only default or trivial functionalities result. These are described in the following table:

Method	Always returns
AddContent	Current PBDOM_PROCESSINGINSTRUCTION. Use AddValue instead.
GetContent	false. Use GetName and GetValue instead.
HasChildren	false.
InsertContent	Current PBDOM_PROCESSINGINSTRUCTION.
IsAncestorObjectOf	false.
RemoveContent	false. Use RemoveValue instead.
SetContent	Current PBDOM_PROCESSINGINSTRUCTION. Use SetData instead.

PBDOM_PROCESSINGINSTRUCTION has the following methods:

- Clone
- Detach
- Equals
- GetData
- GetName
- GetNames
- GetObjectClass
- GetObjectClassString
- GetOwnerDocumentObject
- GetParentObject
- GetTarget
- GetText
- GetTextNormalize
- GetTextTrim
- GetValue
- RemoveValue
- SetData
- SetName
- SetParentObject
- SetValue

Clone

Description	Creates and returns a clone of the current PBDOM_PROCESSINGINSTRUCTION object.
-------------	--

Syntax *pbdom_pi_name.Clone(boolean bDeep)*

Argument	Description
<i>pbdom_pi_name</i>	The name of a PBDOM_PROCESSINGINSTRUCTION object.
<i>bDeep</i>	A boolean specifying whether a deep or shallow clone is returned. Values are <code>true</code> for a deep clone and <code>false</code> for a shallow clone. This argument is currently ignored.

Return value	PBDOM_OBJECT. A clone of the current PBDOM_PROCESSINGINSTRUCTION object returned as a PBDOM_OBJECT.
--------------	---

Throws	EXCEPTION_PBDOM_OBJECT_INVALID_FOR_USE – If the internal implementation of this PBDOM_PROCESSINGINSTRUCTION object is null. The occurrence of this exception is rare, but it can take place if severe memory corruption occurs.
--------	---

Usage

The Clone method creates a new PBDOM_PROCESSINGINSTRUCTION object that is a duplicate of, and a separate object from, the original. The clone of a PBDOM_PROCESSINGINSTRUCTION object is always identical to its original whether *bDeep* is true or false, because a PBDOM_PROCESSINGINSTRUCTION object contains no subtree of child PBDOM_OBJECTs.

A PBDOM_PROCESSINGINSTRUCTION clone has no parent, but it resides in the same PBDOM_DOCUMENT as its original, and if the original PBDOM_PROCESSINGINSTRUCTION object is standalone, the clone is standalone.

Detach

Description

Detaches a PBDOM_PROCESSINGINSTRUCTION object from its parent PBDOM_OBJECT.

Syntax

pbdom_pi_name.Detach()

Argument	Description
<i>pbdom_pi_name</i>	The name of a PBDOM_PROCESSINGINSTRUCTION object

Return value

PBDOM_OBJECT. This PBDOM_PROCESSINGINSTRUCTION object detached from its parent object. This method does nothing if this PBDOM_PROCESSINGINSTRUCTION object has no parent.

Equals

Description

Tests for the equality of the current PBDOM_PROCESSINGINSTRUCTION object with the supplied PBDOM_OBJECT.

Syntax

pbdom_pi_name.Equals(*pbdom_object_ref*)

Argument	Description
<i>pbdom_pi_name</i>	The name of a PBDOM_PROCESSINGINSTRUCTION object
<i>pbdom_object_ref</i>	A PBDOM_OBJECT for testing for equality with the current PBDOM_PROCESSINGINSTRUCTION object

Return value

Boolean. Returns true if the current PBDOM_PROCESSINGINSTRUCTION object is equivalent to the input PBDOM_OBJECT, and false otherwise.

Throws EXCEPTION_PBDOM_OBJECT_INVALID_FOR_USE – If the input PBDOM_OBJECT is not a reference to an object derived from PBDOM_OBJECT.

GetData

Description Returns the raw data of the PBDOM_PROCESSINGINSTRUCTION object.

Syntax *pbdom_pi_name*.GetData()

Argument	Description
<i>pbdom_pi_name</i>	The name of a PBDOM_PROCESSINGINSTRUCTION object

Return value String. The data of the PBDOM_PROCESSINGINSTRUCTION object.

Usage The processing instruction data is fundamentally a string and *not* a set of name="value" pairs.

GetName

Description Obtains the name of the current PBDOM_PROCESSINGINSTRUCTION object.

Syntax *pbdom_pi_name*.GetName()

Argument	Description
<i>pbdom_pi_name</i>	The name of a PBDOM_PROCESSINGINSTRUCTION object

Return value String.

Examples Calling the GetName method on the following processing instruction returns works:

```
<?works document="hello.doc" data="hello.wks" ?>
```

Usage This method is similar to the GetTarget method. To PBDOM, the processing instruction target is synonymous with its name.

GetNames

Description Retrieves a list of names taken from the part of the PBDOM_PROCESSINGINSTRUCTION object's data that is factored into name="value" pairs. This method can be used in conjunction with the GetValue method.

Syntax *pbdom_pi_name*.GetNames(string *name_array*[])

Argument	Description
<i>pbdom_pi_name</i>	The name of a PBDOM_PROCESSINGINSTRUCTION object
<i>name_array</i>	An unbounded string array filled with names

Return value Boolean. Returns true if a list of names is retrieved, and false otherwise. If there are no name/value pairs, this method returns false.

Examples Given the following PBDOM_PROCESSINGINSTRUCTION object, GetNames returns three strings, a, b, and c, even though a occurs more than once:

```
<? dw-set_values a="1" b="2" c="3" a="4" ?>
```

When the GetValue method is called on a, the value 4 is returned, because it is the last value set for a.

Usage If a name is used more than once as the name of a name/value pair in a PBDOM_PROCESSINGINSTRUCTION object, then the value set in the last occurrence of the name is used, and values declared in all previous occurrences of the name are discarded.

GetObjectClass

Description Returns a long integer code that indicates the class of the current PBDOM_PROCESSINGINSTRUCTION object.

Syntax *pbdom_pi_name*.GetObjectClass()

Argument	Description
<i>pbdom_pi_name</i>	The name of a PBDOM_OBJECT

Return value Long. GetObjectClass returns a long integer code that indicates the class of the current PBDOM_OBJECT. If *pbdom_pi_name* is a PBDOM_PROCESSINGINSTRUCTION object, the returned value is 10.

GetObjectClassString

Description Returns a string form of the class of the PBDOM_PROCESSINGINSTRUCTION object.

Syntax *pbdom_pi_name*.GetObjectClassString()

Argument	Description
<i>pbdom_pi_name</i>	The name of a PBDOM_OBJECT

Return value String. GetObjectClassString returns a string that indicates the class of the current PBDOM_OBJECT. If *pbdom_pi_name* is a PBDOM_PROCESSINGINSTRUCTION, the returned string is “pbdom_processinginstruction”.

GetOwnerDocumentObject

Description Returns the owning PBDOM_DOCUMENT of the current PBDOM_PROCESSINGINSTRUCTION object.

Syntax *pbdom_pi_name*.GetOwnerDocumentObject()

Argument	Description
<i>pbdom_pi_name</i>	The name of a PBDOM_PROCESSINGINSTRUCTION object

Return value PBDOM_DOCUMENT. If there is no owning PBDOM_DOCUMENT, null is returned.

GetParentObject

Description Returns the parent PBDOM_OBJECT of the current PBDOM_PROCESSINGINSTRUCTION object.

Syntax *pbdom_pi_name*.GetParentObject()

Argument	Description
<i>pbdom_pi_name</i>	The name of a PBDOM_PROCESSINGINSTRUCTION object

Return value PBDOM_OBJECT. The parent of the PBDOM_PROCESSINGINSTRUCTION object. If there is no parent, null is returned.

GetTarget

Description	Returns the target of the PBDOM_PROCESSINGINSTRUCTION object.				
Syntax	<i>pbdom_pi_name</i> .GetTarget() <table border="1"> <thead> <tr> <th>Argument</th><th>Description</th></tr> </thead> <tbody> <tr> <td><i>pbdom_pi_name</i></td><td>The name of a PBDOM_PROCESSINGINSTRUCTION object</td></tr> </tbody> </table>	Argument	Description	<i>pbdom_pi_name</i>	The name of a PBDOM_PROCESSINGINSTRUCTION object
Argument	Description				
<i>pbdom_pi_name</i>	The name of a PBDOM_PROCESSINGINSTRUCTION object				
Return value	String. The target of the PBDOM_PROCESSINGINSTRUCTION object.				
Examples	<p>Given the following PBDOM_PROCESSINGINSTRUCTION object, calling the GetTarget method returns the string “xml-stylesheet”:</p> <pre><?xml-stylesheet href="simple-ie5.xsl" type="text/xsl" ?></pre> <p>Calling the GetName method returns the same string.</p>				
See also	GetName				

GetText

Description	Obtains text data that is contained within the current PBDOM_PROCESSINGINSTRUCTION object.				
Syntax	<i>pbdom_pi_name</i> .GetText() <table border="1"> <thead> <tr> <th>Argument</th><th>Description</th></tr> </thead> <tbody> <tr> <td><i>pbdom_pi_name</i></td><td>The name of a PBDOM_PROCESSINGINSTRUCTION object</td></tr> </tbody> </table>	Argument	Description	<i>pbdom_pi_name</i>	The name of a PBDOM_PROCESSINGINSTRUCTION object
Argument	Description				
<i>pbdom_pi_name</i>	The name of a PBDOM_PROCESSINGINSTRUCTION object				
Return value	String.				
Usage	The GetText method returns the text data of the current PBDOM_PROCESSINGINSTRUCTION object. GetText is similar to GetData. However, the textual content of a processing instruction object is not a text node.				
See also	GetData GetTextNormalize GetTextTrim SetData				

GetTextNormalize

Description	Obtains the text data that is contained within the current PBDOM_PROCESSINGINSTRUCTION object with all surrounding whitespace characters removed and internal whitespace characters normalized to a single space.					
Syntax	<i>pbdom_pi_name</i> .GetTextNormalize()					
	<table><tr><th>Argument</th><th>Description</th></tr><tr><td><i>pbdom_pi_name</i></td><td>The name of a PBDOM_PROCESSINGINSTRUCTION object</td></tr></table>	Argument	Description	<i>pbdom_pi_name</i>	The name of a PBDOM_PROCESSINGINSTRUCTION object	
Argument	Description					
<i>pbdom_pi_name</i>	The name of a PBDOM_PROCESSINGINSTRUCTION object					
Return value	String. The normalized text content of the PBDOM_PROCESSINGINSTRUCTION object. If no textual value exists for the current PBDOM_OBJECT, or if only whitespace characters exist, an empty string is returned.					
See also	GetData GetText GetTextTrim SetData					

GetTextTrim

Description	Obtains the text data that is contained within the current PBDOM_PROCESSINGINSTRUCTION object with all surrounding whitespaces removed.					
Syntax	<i>pbdom_pi_name</i> .GetTextTrim()					
	<table><tr><th>Argument</th><th>Description</th></tr><tr><td><i>pbdom_pi_name</i></td><td>The name of a PBDOM_PROCESSINGINSTRUCTION object</td></tr></table>	Argument	Description	<i>pbdom_pi_name</i>	The name of a PBDOM_PROCESSINGINSTRUCTION object	
Argument	Description					
<i>pbdom_pi_name</i>	The name of a PBDOM_PROCESSINGINSTRUCTION object					
Return value	String. The trimmed text content of the PBDOM_PROCESSINGINSTRUCTION object. If no textual value exists for the current PBDOM_PROCESSINGINSTRUCTION object, or if only whitespace characters exist, an empty string is returned.					
See also	GetData GetText GetTextNormalize SetData					

GetValue

Description Returns the value for a specific name/value pair on the PBDOM_PROCESSINGINSTRUCTION object. If no such pair is found for the PBDOM_PROCESSINGINSTRUCTION object, an empty string is returned.

Syntax *pbdom_pi_name.GetValue(string strName)*

Argument	Description
<i>pbdom_pi_name</i>	The name of a PBDOM_PROCESSINGINSTRUCTION object
<i>strName</i>	String name of name/value pair

Return value String. String name of the name/value pair to search for value.

Examples Given the following PBDOM_PROCESSINGINSTRUCTION object, `GetValue("href")` returns the string "simple-ie5.xml":

```
<?xml-stylesheet href="simple-ie5.xml" type="text/xsl"
?>
```

See also [GetData](#)
[GetText](#)
[SetValue](#)

RemoveValue

Description Removes the specified name/value pair.

Syntax *pbdom_pi_name.RemoveValue(string strName)*

Argument	Description
<i>pbdom_pi_name</i>	The name of a PBDOM_PROCESSINGINSTRUCTION object
<i>strName</i>	String name of name/value pair to be removed

Return value Boolean. Returns true if the requested name/value pair is removed and false otherwise.

Examples Suppose the following PBDOM_PROCESSINGINSTRUCTION object is given:

```
<?xml-stylesheet href="simple-ie5.xml" type="text/xsl"
?>
```

Then, `RemoveValue("href")` results in the `PBDOM_PROCESSINGINSTRUCTION` object being transformed into the following:

```
<?xml-stylesheet type="text/xsl" ?>
```

SetData

Description Sets the raw data for the `PBDOM_PROCESSINGINSTRUCTION` object.

Syntax `pbdom_pi_name.SetData(string strData)`

Argument	Description
<i>pbdom_pi_name</i>	The name of a <code>PBDOM_PROCESSINGINSTRUCTION</code> object
<i>strData</i>	New data for the <code>PBDOM_PROCESSINGINSTRUCTION</code> object

Return value `PBDOM_PROCESSINGINSTRUCTION`. The `PBDOM_PROCESSINGINSTRUCTION` object modified with the new data.

Throws `EXCEPTION_INVALID_STRING` – The input data is invalid. This can happen in the following circumstances:

- 1 The input data contains the sub-string “?”>”. This violates the requirements for the data of a processing instruction.
- 2 If the processing instruction target name is `xml`, making this `PBDOM_PROCESSINGINSTRUCTION` object an XML declaration processing instruction, this exception is thrown if the input data string does not conform to the following criteria:
 - The data must contain a name/value pair for the name `version`.
 - The data can contain a name/value pair for the name `encoding`.
 - The data can contain a name/value pair for the name `standalone`. If it does, the value for `standalone` must either be `yes` or `no`.
 - The data must not contain any other data in the form of name/value pairs or in any other form.

Lowercase
The strings `xml`, `version`, `encoding`, `standalone`, `yes`, and `no` are all case sensitive and must be in lowercase.

Examples

Suppose there is a PBDOM_PROCESSINGINSTRUCTION object as follows:

```
<?xml-stylesheet href="simple-ie5.xml" type="text/xml"
?>
```

Then, `SetData("href=new.xml")` results in the PBDOM_PROCESSINGINSTRUCTION object being transformed into the following:

```
<?xml-stylesheet href=new.xml" ?>
```

The entire data for the PBDOM_PROCESSINGINSTRUCTION object is now reset.

Usage

Special processing is performed when the name of the processing instruction's target is `xml`, which indicates that it is an XML declaration. The valid instructions allowed in the input Data as part of the name in the name/value pairs are `version`, `encoding`, and `standalone`. The version instruction is mandatory before the processing instruction can be added to a document.

The XML specification expects the instructions to be in the specific order `version`, `encoding`, `standalone`. This function reorders the input data to conform to the specification, for example:

```
<? xml version="1.0" encoding="utf-8"
standalone="yes"?>
```

SetName**Description**

Sets the name of the current PBDOM_PROCESSINGINSTRUCTION object.

Syntax

pbdom_pi_name.SetName(string *strName*)

Argument	Description
<i>pbdom_pi_name</i>	The name of a PBDOM_PROCESSINGINSTRUCTION object
<i>strName</i>	The new name you want to set for the current PBDOM_PROCESSINGINSTRUCTION object

Return value

Boolean. Returns true if the name of the current PBDOM_PROCESSINGINSTRUCTION object was changed, and false otherwise.

Throws	<p>EXCEPTION_INVALID_NAME – This exception is thrown if the name is invalid. The name can be <code>xml</code>, making this PBDOM_PROCESSINGINSTRUCTION object an XML declaration processing instruction. However, in this case, the name <code>xml</code> must be in lowercase, or the EXCEPTION_INVALID_NAME exception will be thrown.</p> <p>EXCEPTION_INVALID_STRING – This exception is thrown if the name is <code>xml</code> and the current data of this PBDOM_PROCESSINGINSTRUCTION object is not valid. The data is valid only under the following circumstances:</p> <ul style="list-style-type: none">• It is an empty string.• If it is not an empty string, it must contain a name/value pair for the name <code>version</code>.• If it is not an empty string and it contains a name/value pair for the name <code>version</code>, it can also contain a name/value pair for the name <code>encoding</code>.• If it is not an empty string and it contains a name/value pair for the name <code>version</code>, it can also contain a name/value pair for the name <code>standalone</code>. If it does, the value for <code>standalone</code> must be either <code>yes</code> or <code>no</code> (both are case sensitive).• If it is not an empty string and it contains a name/value pair for the name <code>version</code>, it must not contain any other data (in name/value pair format or otherwise) except for <code>encoding</code> and <code>standalone</code>.
Usage	<p>This method is equivalent to setting the target of the processing instruction object. See the list of exceptions for information about the restrictions on the use of <code>xml</code> as the target.</p>

SetParentObject

Description	Sets the referenced PBDOM_OBJECT to be the parent of the current PBDOM_PROCESSINGINSTRUCTION object.							
Syntax	<i>pbdom_pi_name</i> .SetParentObject(pbdom_object <i>pbdom_object_ref</i>)							
	<table><tr><th>Argument</th><th>Description</th></tr><tr><td><i>pbdom_pi_name</i></td><td>The name of a PBDOM_PROCESSINGINSTRUCTION object</td></tr><tr><td><i>pbdom_object_ref</i></td><td>A PBDOM_OBJECT to be set as the parent of the current PBDOM_PROCESSINGINSTRUCTION object</td></tr></table>	Argument	Description	<i>pbdom_pi_name</i>	The name of a PBDOM_PROCESSINGINSTRUCTION object	<i>pbdom_object_ref</i>	A PBDOM_OBJECT to be set as the parent of the current PBDOM_PROCESSINGINSTRUCTION object	
Argument	Description							
<i>pbdom_pi_name</i>	The name of a PBDOM_PROCESSINGINSTRUCTION object							
<i>pbdom_object_ref</i>	A PBDOM_OBJECT to be set as the parent of the current PBDOM_PROCESSINGINSTRUCTION object							
Return value	PBDOM_OBJECT. This PBDOM_PROCESSINGINSTRUCTION object modified.							

Throws	<p>EXCEPTION_PBDOM_OBJECT_INVALID_FOR_USE – If the input PBDOM_OBJECT is not a reference to an object derived from PBDOM_OBJECT.</p> <p>EXCEPTION_HIERARCHY_ERROR – If setting the input PBDOM_OBJECT to be the parent of this PBDOM_PROCESSINGINSTRUCTION object will cause the parent PBDOM_OBJECT to be no longer well formed. For example, if this PBDOM_PROCESSINGINSTRUCTION object is an XML declaration and the parent to be set is a PBDOM_ELEMENT.</p>
Usage	<p>The PBDOM_OBJECT that you set as the parent and the current PBDOM_PROCESSINGINSTRUCTION object must have a legal parent-child relationship. Currently, only a PBDOM_ELEMENT and a PBDOM_DOCUMENT can be set as the parent of a PBDOM_PROCESSINGINSTRUCTION object.</p>

SetValue

Description	Sets the value for the specified name/value pair.								
Syntax	<i>pbdom_pi_name</i> .SetValue(string <i>strName</i> , string <i>strValue</i>)								
	<table> <tr> <th>Argument</th><th>Description</th></tr> <tr> <td><i>pbdom_pi_name</i></td><td>The name of a PBDOM_PROCESSINGINSTRUCTION object</td></tr> <tr> <td><i>strName</i></td><td>String name of a name/value pair</td></tr> <tr> <td><i>strValue</i></td><td>String value of a name/value pair</td></tr> </table>	Argument	Description	<i>pbdom_pi_name</i>	The name of a PBDOM_PROCESSINGINSTRUCTION object	<i>strName</i>	String name of a name/value pair	<i>strValue</i>	String value of a name/value pair
Argument	Description								
<i>pbdom_pi_name</i>	The name of a PBDOM_PROCESSINGINSTRUCTION object								
<i>strName</i>	String name of a name/value pair								
<i>strValue</i>	String value of a name/value pair								
Return value	PBDOM_PROCESSINGINSTRUCTION .								
Throws	<p>EXCEPTION_INVALID_STRING – The input <i>strName</i>/<i>strValue</i> is invalid. This can happen in the following circumstances:</p> <ul style="list-style-type: none"> • The input <i>strName</i>/<i>strValue</i> data contains the sub-string <code>?></code>. This violates the requirements for the data of a processing instruction. • If the target name is <code>xml</code>, making this PBDOM_PROCESSINGINSTRUCTION object an XML declaration processing instruction, this exception is thrown if the input data string does not conform to the following criterion: the data can contain a name/value pair for the name <code>standalone</code>. If it does, the value for <code>standalone</code> must either be <code>yes</code> or <code>no</code>. The strings <code>xml</code>, <code>standalone</code>, <code>yes</code>, and <code>no</code> are case sensitive and must be lowercase. 								

EXCEPTION_INVALID_NAME - The input *strName* is invalid. This can happen if the target name is `xml`, making this

PBDOM_PROCESSINGINSTRUCTION object an XML declaration processing instruction, and either of the following is true:

- The *strName* value is other than `version`, `standalone` or `encoding`.
- Either `standalone` or `encoding` is set without the `version` first being set.

Examples

Consider the following PBDOM_PROCESSINGINSTRUCTION object:

```
<?xml-stylesheet href="simple-ie5.xsl" type="text/xsl" ?>
```

`SetValue("href", "new.xsl")` transforms this processing instruction to the following, modifying the value for *href*:

```
<?xml-stylesheet href="new.xsl" type="text/xsl"?>
```

`SetValue("extra_info", "xalan")` transforms the processing instruction to the following, adding a new name/value pair for *extra_info*:

```
<?xml-stylesheet href=new.xsl" type="text/xsl"
extra_info "xalan" ?>
```

Then `SetValue("extra_info_2", "")` transforms the processing instruction to the following, adding a new name/value pair for *extra_info_2* with an empty string as the value:

```
<?xml-stylesheet href=new.xsl" type="text/xsl"
extra_info="xalan" extra_info_2="" ?>
```

Usage

If no value is found, the supplied pair is added to the processing instruction data. The appearance of name/value pairs in a PBDOM_PROCESSINGINSTRUCTION object is not subject to any order. In this way, name/value pairs in a PBDOM_PROCESSINGINSTRUCTION object are similar to attributes in an element. Attributes are specifically *not* ordered.

Special processing is performed when the name of the processing instruction's target is `xml`, which indicates that it is an XML declaration. The valid instructions allowed in the input Data as part of the name in the name/value pairs are `version`, `encoding`, and `standalone`. The `version` instruction is mandatory before the processing instruction can be added to a document.

The XML specification expects the instructions to be in this specific order: `version`, `encoding`, `standalone`. This function reorders the input data to conform to the specification, for example:

```
<? xml version="1.0" encoding="utf-8" standalone="yes"?>
```


About this chapter

This chapter describes the PBDOM_TEXT class.

PBDOM_TEXT

Description

The PBDOM_TEXT class represents a DOM Text Node within an XML document. It extends the PBDOM_CHARACTERDATA class with a set of methods specifically intended for manipulating DOM text nodes.

The PBDOM_TEXT class is derived from the PBDOM_CHARACTERDATA class. PBDOM_TEXT objects are commonly used to represent the textual content of a PBDOM_ELEMENT or PBDOM_ATTRIBUTE.

Whitespace characters

The text in a PBDOM_TEXT object can include whitespace characters such as carriage returns, linefeeds, tabs, and spacebar spaces.

Methods

Some of the inherited methods from PBDOM_OBJECT serve no meaningful objective, and only default or trivial functionalities result. These are described in the following table:

Method	Always returns
AddContent	current PBDOM_TEXT
GetContent	false
GetName	a string “#text”
HasChildren	false
InsertContent	current PBDOM_TEXT
IsAncestorObjectOf	false
RemoveContent	false
SetContent	current PBDOM_TEXT
SetName	false

PBDOM_TEXT has the following non-trivial methods:

- Append
- Clone
- Detach
- Equals
- GetObjectClass
- GetObjectClassString
- GetOwnerDocumentObject
- GetParentObject
- GetText
- GetTextNormalize
- GetTextTrim
- SetParentObject
- SetText

Append

Description

The Append method is overloaded:

- Syntax 1 appends an input string to the text content that already exists within the current PBDOM_TEXT object.
- Syntax 2 appends the text data of a PBDOM_CHARACTERDATA object to the text content that already exists within the current PBDOM_TEXT object.

Syntax

For this syntax	See
Append(string <i>strAppend</i>)	Append Syntax 1
Append(pbdom_characterdata <i>pbdom_characterdata_ref</i>)	Append Syntax 2

Append Syntax 1

Description

Appends an input string to the text content that already exists within the current PBDOM_TEXT object.

Syntax

pbdom_text_name.Append(string *strAppend*)

Argument	Description
<i>pbdom_text_name</i>	The name of a PBDOM_TEXT object

Argument	Description
<i>strAppend</i>	The string you want appended to the existing text of the current PBDOM_TEXT object

Return value PBDOM_CHARACTERDATA. The current PBDOM_TEXT object modified and returned as a PBDOM_CHARACTERDATA object.

Append Syntax 2

Description Appends the text data of a PBDOM_CHARACTERDATA object to the text content that already exists within the current PBDOM_TEXT object.

Syntax *pbdom_text_name.Append(pbdom_characterdata pbdom_characterdata_ref)*

Argument	Description
<i>pbdom_text_name</i>	The name of a PBDOM_TEXT object
<i>pbdom_characterdata_ref</i>	The referenced PBDOM_CHARACTERDATA object whose text data is to be appended to the existing text of the current PBDOM_TEXT object

Return value PBDOM_CHARACTERDATA. The current PBDOM_TEXT object modified and returned as a PBDOM_CHARACTERDATA object.

Throws EXCEPTION_PBDOM_OBJECT_INVALID_FOR_USE – If the input PBDOM_CHARACTERDATA is not a reference to an object inherited from PBDOM_CHARACTERDATA.

Usage Note that JDOM does not define an Append method for its TEXT class. Because PBDOM implements its Append method in the base PBDOM_CHARACTERDATA class, a PBDOM_COMMENT object, a PBDOM_CDATA object, and a PBDOM_TEXT object can append their internal text data to each other, because they are all objects inherited from PBDOM_CHARACTERDATA.

Clone

Description Creates and returns a clone of the current PBDOM_TEXT object.

Syntax *pbdom_text_name.Clone(boolean bDeep)*

Argument	Description
<i>pbdom_text_name</i>	The name of a PBDOM_TEXT object.
<i>bDeep</i>	A boolean specifying whether a deep or shallow clone is returned. Values are true for a deep clone and false for a shallow clone. This parameter is ignored.

Return value PBDOM_OBJECT. The return value is a clone of the current PBDOM_TEXT object returned as a PBDOM_OBJECT.

Examples This example creates an XML document that, when serialized, appears as follows :

```
<!DOCTYPE root
[
<!ELEMENT root (child_1, child_2)>
<!ELEMENT child_1 (#PCDATA)*>
<!ELEMENT child_2 (#PCDATA)*>
]>
<root>
  <child_1>text for child.</child_1>
  <child_2>text for child.</child_2>
</root>
```

The definition of the DTD shows that the document is required to have the following composition:

- The document contains a root element with the name root.
- The root element contains a sequence of two child elements named child_1 and child_2.
- Both child_1 and child_2 contain only text.

The following PowerShell code creates a PBDOM_TEXT object and assigns it a text value. It then creates a child_1 element, adds the PBDOM_TEXT object to it, creates a shallow clone of child_1, and names the clone child_2. After adding a clone of the text object to child_2, the code adds both child objects to the root element:

```
PBDOM_BUILDER      pbdom_buildr
PBDOM_DOCUMENT     pbdom_doc
PBDOM_ELEMENT      pbdom_elem_child_1
PBDOM_ELEMENT      pbdom_elem_child_2
PBDOM_TEXT         pbdom_txt
string strXML = "<!DOCTYPE root [<!ELEMENT root
(child_1, child_2)><!ELEMENT child_1
(#PCDATA)><!ELEMENT child_2 (#PCDATA)>]><root/>"
```

```
try
    pbdom_buildr = Create PBDOM_BUILDER
    pbdom_doc = pbdom_buildr.BuildFromString (strXML)

    pbdom_txt = Create PBDOM_TEXT
    pbdom_txt.SetText ("text for child.")

    pbdom_elem_child_1 = Create PBDOM_ELEMENT
    pbdom_elem_child_1.SetName ("child_1")
    pbdom_elem_child_1.AddContent (pbdom_txt)

    pbdom_elem_child_2 = pbdom_elem_child_1.Clone(false)
    pbdom_elem_child_2.SetName("child_2")
    pbdom_elem_child_2.AddContent
    (pbdom_txt.Clone(false))

    pbdom_doc.GetRootElement().AddContent(pbdom_elem_chi
ld_1)
    pbdom_doc.GetRootElement().AddContent(pbdom_elem_chi
ld_2)

    pbdom_doc.SaveDocument ("sample.xml")

catch (PBDOM_EXCEPTION pbdom_except)
    MessageBox ("PBDOM_EXCEPTION",
pbdom_except.GetMessage())
end try
```

Usage

The Clone method creates a new PBDOM_TEXT object that is a duplicate of, and a separate object from, the original. Whether true or false is supplied as the parameter to this function, a PBDOM_TEXT clone is always identical to its original. This is because a PBDOM_TEXT does not contain any subtree of children PBDOM_OBJECTs.

A PBDOM_TEXT clone has no parent. However, the clone resides in the same PBDOM_DOCUMENT as its original, and if the original PBDOM_TEXT object is standalone, the clone is standalone

Detach

Description

Detaches a PBDOM_TEXT object from its parent PBDOM_OBJECT.

Syntax

pbdom_text_name.Detach()

Return value	Long. <code>GetObjectClass</code> returns a long integer code that indicates the class of the current <code>PBDOM_OBJECT</code> . If <i>pbdom_object_name</i> is a <code>PBDOM_TEXT</code> object, the returned value is 7.
See also	<code>GetObjectClassString</code>

GetObjectClassString

Description	Returns a string form of the class of the <code>PBDOM_OBJECT</code> .				
Syntax	<i>pbdom_object_name</i> . <code>GetObjectClassString()</code>				
	<table> <tr> <th>Argument</th><th>Description</th></tr> <tr> <td><i>pbdom_object_name</i></td><td>The name of a <code>PBDOM_OBJECT</code></td></tr> </table>	Argument	Description	<i>pbdom_object_name</i>	The name of a <code>PBDOM_OBJECT</code>
Argument	Description				
<i>pbdom_object_name</i>	The name of a <code>PBDOM_OBJECT</code>				
Return value	String. <code>GetObjectClassString</code> returns a string that indicates the class of the current <code>PBDOM_OBJECT</code> . If <i>pbdom_object_name</i> is a <code>PBDOM_TEXT</code> object, the returned string is "pbdom_text".				
See also	<code>GetObjectClass</code>				

GetOwnerDocumentObject

Description	Returns the owning <code>PBDOM_DOCUMENT</code> of the current <code>PBDOM_TEXT</code> object.				
Syntax	<i>pbdom_text_name</i> . <code>GetOwnerDocumentObject()</code>				
	<table> <tr> <th>Argument</th><th>Description</th></tr> <tr> <td><i>pbdom_text_name</i></td><td>The name of a <code>PBDOM_TEXT</code> object</td></tr> </table>	Argument	Description	<i>pbdom_text_name</i>	The name of a <code>PBDOM_TEXT</code> object
Argument	Description				
<i>pbdom_text_name</i>	The name of a <code>PBDOM_TEXT</code> object				
Return value	<code>PBDOM_OBJECT</code> .				
Usage	If there is no owning <code>PBDOM_DOCUMENT</code> , null is returned.				

GetParentObject

Description	Returns the parent <code>PBDOM_OBJECT</code> of the current <code>PBDOM_TEXT</code> object.				
Syntax	<i>pbdom_text_name</i> . <code>GetParentObject()</code>				
	<table> <tr> <th>Argument</th><th>Description</th></tr> <tr> <td><i>pbdom_text_name</i></td><td>The name of a <code>PBDOM_TEXT</code> object</td></tr> </table>	Argument	Description	<i>pbdom_text_name</i>	The name of a <code>PBDOM_TEXT</code> object
Argument	Description				
<i>pbdom_text_name</i>	The name of a <code>PBDOM_TEXT</code> object				

Return value	PBDOM_OBJECT.
Usage	The parent is also an object inherited from PBDOM_TEXT object. If the PBDOM_TEXT object has no parent, null is returned.
See also	SetParentObject

GetText

Description Obtains the text data that is contained within the current PBDOM_TEXT object.

Syntax *pbdom_text_name*.GetText()

Argument	Description
<i>pbdom_text_name</i>	The name of a PBDOM_TEXT object

Return value String. The GetText method returns the textual content of the current PBDOM_TEXT object.

Examples If you have the element <abc>MY TEXT</abc>, and you have a PBDOM_TEXT object to represent the text node “MY TEXT”, then calling GetText on the PBDOM_TEXT object returns the string “MY TEXT”.

See also GetTextNormalize
GetTextTrim
SetText

GetTextNormalize

Description Obtains the text data that is contained within the current PBDOM_TEXT object, with all surrounding whitespace characters removed and internal whitespace characters normalized to a single space.

Syntax *pbdom_text_name*.GetTextNormalize()

Argument	Description
<i>pbdom_text_name</i>	The name of a PBDOM_TEXT object

Return value String.

Examples If you have a PBDOM_TEXT object that represents the text node “ MY TEXT ”, calling GetTextNormalize returns the string “MY TEXT”. All surrounding whitespaces are removed, and the whitespaces between the words “MY” and “TEXT” are reduced to a single space.

Usage	This method allows the caller to obtain the text data that is contained within the current PBDOM_TEXT object with all surrounding whitespaces removed and internal whitespaces normalized to single spaces. If no textual value exists for the current PBDOM_TEXT object, or if only whitespaces exist, an empty string is returned.
See also	GetText GetTextTrim SetText

GetTextTrim

Description	Returns the textual content of the current PBDOM_TEXT object with all surrounding whitespace characters removed.				
Syntax	<i>pbdom_text_name</i> .GetTextTrim() <table> <tr> <th>Argument</th><th>Description</th></tr> <tr> <td><i>pbdom_text_name</i></td><td>The name of a PBDOM_TEXT object</td></tr> </table>	Argument	Description	<i>pbdom_text_name</i>	The name of a PBDOM_TEXT object
Argument	Description				
<i>pbdom_text_name</i>	The name of a PBDOM_TEXT object				
Return value	String.				
Examples	If you have a PBDOM_TEXT object that represents the text node “ MY TEXT ”, calling GetTextNormalize returns the string “MY TEXT”. All surrounding white spaces are removed. The whitespaces between the words “MY” and “TEXT” are preserved.				
Usage	This method allows the caller to obtain the text data that is contained within the current PBDOM_TEXT object with all surrounding whitespaces removed. Internal whitespaces are preserved. If no textual value exists for the current PBDOM_TEXT object, or if only whitespaces exist, an empty string is returned.				
See also	GetText GetTextNormalize SetText				

SetParentObject

Description	Sets the referenced PBDOM_OBJECT to be the parent of the current PBDOM_TEXT object.
Syntax	<i>pbdom_text_name</i> .SetParentObject(<i>pbdom_object pbdom_object_ref</i>)

Argument	Description
<i>pbdom_text_name</i>	The name of a PBDOM_TEXT object
<i>pbdom_object_ref</i>	A PBDOM_OBJECT to be set as the parent of the current PBDOM_TEXT object

Return value	PBDOM_OBJECT.
Throws	<p>EXCEPTION_PBDOM_OBJECT_INVALID_FOR_USE – If the input PBDOM_OBJECT is not referenced to an object derived from PBDOM_OBJECT.</p> <p>EXCEPTION_PBDOM_OBJECT_ALREADY_HAS_PARENT – If the current PBDOM_TEXT object already has a parent.</p> <p>EXCEPTION_INAPPROPRIATE_USE_OF_PBDOM_OBJECT – If the input PBDOM_OBJECT is of a class that does not have a proper parent-child relationship with the PBDOM_TEXT class.</p> <p>EXCEPTION_USE_OF_UNNAMED_PBDOM_OBJECT – If the input PBDOM_OBJECT requires a user-defined name and it has not been named.</p>
Usage	The PBDOM_OBJECT that you set to be the parent of the current PBDOM_TEXT object must have a legal parent-child relationship with the current object. If it does not, an exception is thrown. Only a PBDOM_ELEMENT is allowed to be set as the parent of a PBDOM_TEXT object.
See also	GetParentObject

SetText

Description	Sets the input string to be the text content of the current PBDOM_TEXT object.
Syntax	<i>pbdom_text_name</i> .SetText(<i>strSet</i>)

Argument	Description
<i>pbdom_text_name</i>	The name of a PBDOM_TEXT object
<i>strSet</i>	The string you want set as the text of the PBDOM_TEXT object

Return value	String. If no DTD is referenced, an empty string is returned.
--------------	---

See also

GetText
GetTextNormalize
GetTextTrim

About this chapter

This chapter provides a quick reference to the methods of PBDOM base classes and additional methods provided by inherited classes.

Summary of PBDOM classes and methods

PBDOM_OBJECT inherited from PowerBuilder NonVisualObject

`addcontent (pbdom_object pbdom_object_ref)` returns `pbdom_object`
`clone (boolean bdeep)` returns `pbdom_object`
`detach ()` returns `pbdom_object`
`equals (pbdom_object pbdom_object_ref)` returns `boolean`
`getcontent (ref pbdom_object pbdom_object_array[])` returns `boolean`
`getname ()` returns `string`
`getobjectclass ()` returns `long`
`getobjectclassstring ()` returns `string`
`getownerdocumentobject ()` returns `pbdom_document`
`getparentobject ()` returns `pbdom_object`
`gettext ()` returns `string`
`gettextnormalize ()` returns `string`
`gettexttrim ()` returns `string`
`haschildren ()` returns `boolean`
`insertcontent (pbdom_object pbdom_object_new, pbdom_object pbdom_object_ref)` returns `pbdom_object`
`isancestorobjectof (pbdom_object pbdom_object_ref)` returns `boolean`
`removecontent (pbdom_object pbdom_object_ref)` returns `boolean`
`setcontent (pbdom_object pbdom_object_array[])` returns `pbdom_object`
`setname (string strname)` returns `boolean`
`setparentobject (pbdom_object pbdom_object_ref)` returns `pbdom_object`

PBDOM_ELEMENT inherited from PBDOM_OBJECT

`addcontent (string strtext)` returns `pbdom_element`
`addnamespacedeclaration (string strnamespaceprefix, string strnamespaceuri)` returns `pbdom_element`
`getattribute (string strname)` returns `pbdom_attribute`
`getattribute (string strname, string strnamespaceprefix, string strnamespaceuri)` returns `pbdom_attribute`
`getattributes (ref pbdom_attribute pbdom_attribute_array[])` returns `boolean`
`getattributevalue (string strattributename)` returns `string`
`getattributevalue (string strattributename, string strdefaultvalue)` returns `string`
`getattributevalue (string strattributename, string strnamespaceprefix, string strnamespaceuri)` returns `string`
`getattributevalue (string strattributename, string strnamespaceprefix, string strnamespaceuri, string strdefaultvalue)` returns `string`
`getchildelement (string strelementname)` returns `pbdom_element`
`getchildelement (string strelementname, string strnamespaceprefix, string strnamespaceuri)` returns `pbdom_element`
`getchildelements (ref pbdom_element pbdom_element_array[])` returns `boolean`
`getchildelements (string strelementname, ref pbdom_element pbdom_element_array[])` returns `boolean`
`getchildelements (string strelementname, string strnamespaceprefix, string strnamespaceuri, ref pbdom_element pbdom_element_array[])` returns `boolean`
`getnamespaceprefix ()` returns `string`
`getnamespaceuri ()` returns `string`
`getqualifiedname ()` returns `string`
`hasattributes ()` returns `boolean`
`haschildelements ()` returns `boolean`
`isrootelement ()` returns `boolean`
`removeattribute (pbdom_attribute pbdom_attribute_ref)` returns `boolean`
`removeattribute (string strattributename)` returns `boolean`
`removeattribute (string strattributename, string strnamespaceprefix, string strnamespaceuri)` returns `boolean`
`removechildelement (string strelementname)` returns `boolean`
`removechildelement (string strelementname, string strnamespaceprefix, string strnamespaceuri)` returns `boolean`
`removechildelements ()` returns `boolean`
`removechildelements (string strelementname)` returns `boolean`
`removechildelements (string strelementname, string strnamespaceprefix, string strnamespaceuri)` returns `boolean`
`removenamespacedeclaration (string strnamespaceprefix, string strnamespaceuri)` returns `boolean`
`setattribute (pbdom_attribute pbdom_attribute_ref)` returns `pbdom_element`
`setattribute (string strname, string strvalue)` returns `pbdom_element`
`setattribute (string strname, string strvalue, string strnamespaceprefix, string strnamespaceuri, boolean bverifynamespace)` returns `long`
`setattributes (pbdom_attribute pbdom_attribute_array[])` returns `pbdom_element`
`setdocument (pbdom_object pbdom_document_ref)` returns `pbdom_element`
`setnamespace (string strnamespaceprefix, string strnamespaceuri, boolean bverifynamespace)` returns `long`
`settext (string strtext)` returns `pbdom_element`

PBDOM_ATTRIBUTE inherited from PBDOM_OBJECT

getbooleanvalue () returns boolean
getdatetimevalue (string strdateformat, string strtimeformat) returns datetime
getdatevalue (string strdateformat) returns date
getdoublevalue () returns double
getintvalue () returns integer
getlongvalue () returns long
getnamespaceprefix () returns string
getnamespaceuri () returns string
getownerelementobject () returns pbdom_element
getqualifiedname () returns string
getrealvalue () returns real
gettimevalue (string strtimeformat) returns time
getuintvalue () returns unsignedinteger
getulongvalue () returns unsignedlong
setbooleanvalue (boolean boolvalue) returns pbdom_attribute
setdatetimevalue (datetime datetimevalue, string strdateformat, string strtimeformat) returns pbdom_attribute
setdatevalue (date datevalue, string strdateformat) returns pbdom_attribute
setdoublevalue (double doublevalue) returns pbdom_attribute
setintvalue (integer intvalue) returns pbdom_attribute
setlongvalue (long longvalue) returns pbdom_attribute
setnamespace (string strnamespaceprefix, string strnamespaceuri, boolean bverifynamespace) returns long
setownerelementobject(pbdom_element pbdom_element_ref) returns pbdom_attribute
setrealvalue (real realvalue) returns pbdom_attribute
settext (string strtext) returns pbdom_attribute
settimevalue (time timevalue, string strtimeformat) returns pbdom_attribute
setuintvalue (unsignedinteger uintvalue) returns pbdom_attribute
setulongvalue (unsignedlong ulongvalue) returns pbdom_attribute

PBDOM_CHARACTERDATA inherited from PBDOM_OBJECT

append (pbdom_characterdata pbdom_characterdata_ref) returns pbdom_characterdata
append (string strappend) returns pbdom_characterdata
settext (string strtext) returns pbdom_characterdata

PBDOM_COMMENT inherited from PBDOM_CHARACTERDATA

No added methods.

PBDOM_TEXT inherited from PBDOM_CHARACTERDATA

No added methods.

PBDOM_CDATA inherited from PBDOM_TEXT

No added methods.

PBDOM_DOCTYPE inherited from PBDOM_OBJECT

getinternalsubset () returns string
getpublicid () returns string
getsystemid () returns string
setdocument (pbdom_document pbdom_document_ref) returns pbdom_doctype
setinternalsubset (string strinternalsubset) returns pbdom_doctype
setpublicid (string strpublicid) returns pbdom_doctype
setsystemid (string strsystemid) returns pbdom_doctype

PBDOM_DOCUMENT inherited from PBDOM_OBJECT

detachrootelement () returns pbdom_element
getdoctype () returns pbdom_doctype
getrootelement () returns pbdom_element
hasrootelement () returns boolean
newdocument (string strootelementname) returns boolean
newdocument (string strootelementnamespaceprefix, string strootelementnamespaceuri,
string strootelementname, string strdoctypepublicid, string strdoctypesystemid) returns boolean
savedocument (string strfilename) returns boolean
setdoctype (pbdom_doctype pbdom_doctype_ref) returns pbdom_document
setrootelement (pbdom_element pbdom_element_ref) returns pbdom_document

PBDOM_ENTITYREFERENCE inherited from PBDOM_OBJECT

No added methods.

PBDOM_PROCESSINGINSTRUCTION inherited from PBDOM_OBJECT

getdata () returns string
getnames (ref string name_array[]) returns boolean
gettarget () returns string
getvalue (string strname) returns string
removevalue (string strname) returns boolean
setdata (string strdata) returns pbdom_processinginstruction
setvalue (string strname, string strvalue) returns pbdom_processinginstruction

PBDOM_BUILDER inherited from PowerBuilder NonVisualObject

buildfromdatastore (datastore datastore_ref) returns pbdom_document
buildfromfile (string strurl) returns pbdom_document
buildfromstring (string strxmlstream) returns pbdom_document
getparseerrors(ref string strErrorMessageArray[]) returns boolean

PBDOM_EXCEPTION inherited from PowerBuilder Exception

getexceptioncode () returns long

Index

A

AddContent method (PBDOM_ATTRIBUTE) 47
AddContent method (PBDOM_DOCUMENT) 178
AddContent method (PBDOM_ELEMENT) 200
AddContent method (PBDOM_OBJECT) 268
AddNamespaceDeclaration
 method (PBDOM_ELEMENT) 204
Append method (PBDOM_CDATA) 104
Append method (PBDOM_COMMENT) 154, 155
Append method (PBDOM_TEXT) 122, 123,
 126, 306

B

Begin method (EJBTransaction) 10
BuildFromDataStore method
 (PBDOM_BUILDER) 95
BuildFromFile method (PBDOM_BUILDER) 96
BuildFromString method (PBDOM_BUILDER) 99

C

classes, EJB
 EJBConnection 5
 EJBTransaction 10
 JavaVM 16
classes, PBDOM
 overview 43
 PBDOM_ATTRIBUTE 45
 PBDOM_BUILDER 95
 PBDOM_CDATA 103
 PBDOM_CHARACTERDATA 121
 PBDOM_COMMENT 153
 PBDOM_DOCTYPE 165
 PBDOM_DOCUMENT 177
 PBDOM_ELEMENT 199
 PBDOM_ENTITYREFERENCE 113

PBDOM_EXCEPTION 265
PBDOM_OBJECT 267
PBDOM_PROCESSINGINSTRUCTION 291
PBDOM_TEXT 305
 quick reference 317
classes, SOAP
 SoapConnection 29
 SoapException 34
classes, UDDIProxy 36
Clone method (PBDOM_ATTRIBUTE) 47
Clone method (PBDOM_CDATA) 105, 114
Clone method (PBDOM_CHARACTERDATA) 126
Clone method (PBDOM_COMMENT) 156
Clone method (PBDOM_DOCTYPE) 166
Clone method (PBDOM_DOCUMENT) 181
Clone method (PBDOM_ELEMENT) 205
Clone method (PBDOM_OBJECT) 268
Clone method
 (PBDOM_PROCESSINGINSTRUCTION)
 292
Clone method (PBDOM_TEXT) 307
Commit method (EJBTransaction) 11
ConnectToServer method (EJBConnection) 5
conventions xiv
CreateInstance method (SoapConnection) 29
CreateJavaInstance method (EJBConnection) 7
CreateJavaInstance method (JavaVM) 19
CreateJavaVM method (JavaVM) 16

D

Detach method (PBDOM_ATTRIBUTE) 49
Detach method (PBDOM_CDATA) 107
Detach method (PBDOM_CHARACTERDATA) 129
Detach method (PBDOM_COMMENT) 158
Detach method (PBDOM_DOCTYPE) 167
Detach method (PBDOM_ELEMENT) 207
Detach method
 (PBDOM_ENTITYREFERENCE) 116

Detach method (PBDOM_OBJECT) 269
Detach method
 (PBDOM_PROCESSINGINSTRUCTION) 293
Detach method (PBDOM_TEXT) 309
DisconnectServer method (EJBConnection) 7
DynamicCast method (JavaVM) 20

E

EJB classes
 EJBConnection 5
 EJBTransaction 10
 JavaVM 16
EJBConnection class 5
EJBTransaction class 10
Equals method (PBDOM_ATTRIBUTE) 51
Equals method (PBDOM_CDATA) 108
Equals method (PBDOM_CHARACTERDATA) 130
Equals method (PBDOM_COMMENT) 159
Equals method (PBDOM_DOCTYPE) 167
Equals method (PBDOM_ELEMENT) 207
Equals method (PBDOM_ENTITYREFERENCE) 116
Equals method (PBDOM_OBJECT) 270
Equals method
 (PBDOM_PROCESSINGINSTRUCTION) 293
Equals method (PBDOM_TEXT) 310
EXCEPTION_DATA_CONVERSION 263
EXCEPTION_HIERARCHY_ERROR 264
EXCEPTION_ILLEGAL_PBOBJECT 262
EXCEPTION_INAPPROPRIATE_USE_OF_PBDOM_OBJECT 261
EXCEPTION_INTERNAL_XML_ENGINE_ERROR 263
EXCEPTION_INVALID_ARGUMENT 262
EXCEPTION_INVALID_NAME 263
EXCEPTION_INVALID_OPERATION 264
EXCEPTION_INVALID_STRING 264
EXCEPTION_MEMORY_ALLOCATION_FAILURE 263
EXCEPTION_MULTIPLE_DOCTYPE 262
EXCEPTION_MULTIPLE_ROOT_ELEMENT 260
EXCEPTION_MULTIPLE_XMLDECL 264
EXCEPTION_PBDOM_NOT_INITIALIZED 265
EXCEPTION_PBDOM_OBJECT_ALREADY_HAS_OWNER 264

EXCEPTION_PBDOM_OBJECT_ALREADY_HAS_PARENT 261
EXCEPTION_PBDOM_OBJECT_INVALID_FOR_USE 261
EXCEPTION_USE_OF_UNNAMED_PBDOM_OBJECT 260
EXCEPTION_WRONG_DOCUMENT_ERROR 260
EXCEPTION_WRONG_PARENT_ERROR 262
exceptions, PBDOM 259
extensions
 about 1
 nonvisual, using 3
 third-party, finding 1
 visual, using 3

F

findBusiness method (UDDIProxy) 37
findService method (UDDIProxy) 39

G

GetActualClass method (JavaVM) 23
GetAttribute method (PBDOM_ELEMENT) 208
GetAttributes method (PBDOM_ELEMENT) 210
GetAttributeValue method
 (PBDOM_ELEMENT) 211
GetBooleanValue method
 (PBDOM_ATTRIBUTE) 52
getBusinessDetail method (UDDIProxy) 38
GetChildElement method (PBDOM_ELEMENT) 215
GetChildElements method
 (PBDOM_ELEMENT) 217
GetContent method (PBDOM_ATTRIBUTE) 53
GetContent method (PBDOM_DOCUMENT) 182
GetContent method (PBDOM_OBJECT) 270
GetData method
 (PBDOM_PROCESSINGINSTRUCTION) 294
GetDateTimeValue method
 (PBDOM_ATTRIBUTE) 55
GetDateValue method (PBDOM_ATTRIBUTE) 54
GetDocType method (PBDOM_DOCUMENT) 184
GetDocument method (PBDOM_ATTRIBUTE) 60

- GetDocument method
 - (PBDOM_CHARACTERDATA) 131
- GetDocument method (PBDOM_COMMENT) 160
- GetDocument method (PBDOM_DOCTYPE) 169
- GetDocument method (PBDOM_ELEMENT) 224
- GetDocument method
 - (PBDOM_ENTITYREFERENCE) 118
- GetDocument method (PBDOM_OBJECT) 274
- GetDocument method
 - (PBDOM_PROCESSINGINSTRUCTION) 296
- GetDocument method (PBDOM_TEXT) 311
- GetDoubleValue method
 - (PBDOM_ATTRIBUTE) 56
- GetEJBTransaction method (EJBConnection) 8
- GetExceptionCode method
 - (PBDOM_EXCEPTION) 265
- GetInterfaces method (JavaVM) 24
- GetInternalSubset method
 - (PBDOM_DOCTYPE) 167
- GetIntValue method (PBDOM_ATTRIBUTE) 56
- GetJavaClasspath method (JavaVM) 25
- GetJavaVMVersion method (JavaVM) 26
- GetLongValue method (PBDOM_ATTRIBUTE) 56
- GetMessage method (SoapException) 34
- GetName method (PBDOM_ATTRIBUTE) 57
- GetName method (PBDOM_CHARACTERDATA) 134
- GetName method (PBDOM_DOCTYPE) 168
- GetName method (PBDOM_ELEMENT) 221
- GetName method
 - (PBDOM_ENTITYREFERENCE) 117
- GetName method (PBDOM_OBJECT) 271
- GetName method
 - (PBDOM_PROCESSINGINSTRUCTION) 294
- GetNames method
 - (PBDOM_PROCESSINGINSTRUCTION) 295
- GetNamespacePrefix method
 - (PBDOM_ATTRIBUTE) 58
- GetNamespacePrefix method
 - (PBDOM_ELEMENT) 222
- GetNamespaceUri method
 - (PBDOM_ATTRIBUTE) 58
- GetNamespaceUri method
 - (PBDOM_ELEMENT) 222
- GetObjectClass method (PBDOM_ATTRIBUTE) 59
- GetObjectClass method (PBDOM_CDATA) 108
- GetObjectClass method
 - (PBDOM_CHARACTERDATA) 134
- GetObjectClass method (PBDOM_COMMENT) 159
- GetObjectClass method (PBDOM_DOCTYPE) 168
- GetObjectClass method
 - (PBDOM_DOCUMENT) 184
- GetObjectClass method (PBDOM_ELEMENT) 223
- GetObjectClass method
 - (PBDOM_ENTITYREFERENCE) 117
- GetObjectClass method (PBDOM_OBJECT) 273
- GetObjectClass method
 - (PBDOM_PROCESSINGINSTRUCTION) 295
- GetObjectClass method (PBDOM_TEXT) 310
- GetObjectClassString method
 - (PBDOM_ATTRIBUTE) 59
- GetObjectClassString method
 - (PBDOM_CDATA) 109
- GetObjectClassString method
 - (PBDOM_CHARACTERDATA) 135
- GetObjectClassString method
 - (PBDOM_COMMENT) 160
- GetObjectClassString method
 - (PBDOM_DOCTYPE) 168
- GetObjectClassString method
 - (PBDOM_DOCUMENT) 185
- GetObjectClassString method
 - (PBDOM_ELEMENT) 223
- GetObjectClassString method
 - (PBDOM_ENTITYREFERENCE) 118
- GetObjectClassString method
 - (PBDOM_OBJECT) 273
- GetObjectClassString method
 - (PBDOM_PROCESSINGINSTRUCTION) 296
- GetObjectClassString method (PBDOM_TEXT) 311
- GetOwnerDocumentObject method
 - (PBDOM_CDATA) 109
- GetOwnerElementObject method
 - (PBDOM_ATTRIBUTE) 62
- GetParent method (PBDOM_ATTRIBUTE) 45
- GetParentObject method (PBDOM_CDATA) 109

- GetParentObject method
 - (PBDOM_CHARACTERDATA) 137
 - GetParentObject method (PBDOM_COMMENT) 160
 - GetParentObject method (PBDOM_DOCTYPE) 169
 - GetParentObject method (PBDOM_ELEMENT) 225
 - GetParentObject method
 - (PBDOM_ENTITYREFERENCE) 118
 - GetParentObject method (PBDOM_OBJECT) 275
 - GetParentObject method
 - (PBDOM_PROCESSINGINSTRUCTION) 296
 - GetParentObject method (PBDOM_TEXT) 311
 - GetParseErrors method (PBDOM_BUILDER) 100
 - GetPublicID method (PBDOM_DOCTYPE) 169
 - GetQualifiedName method (PBDOM_ATTRIBUTE) 63
 - GetQualifiedName method (PBDOM_ELEMENT) 225
 - GetRealValue method (PBDOM_ATTRIBUTE) 64
 - GetStatus method (EJBTransaction) 12
 - GetSuperClass method (JavaVM) 26
 - GetSystemID method (PBDOM_DOCTYPE) 170
 - GetTarget method
 - (PBDOM_PROCESSINGINSTRUCTION) 297
 - GetText method (PBDOM_ATTRIBUTE) 64
 - GetText method (PBDOM_CDATA) 110
 - GetText method (PBDOM_CHARACTERDATA) 140
 - GetText method (PBDOM_COMMENT) 161
 - GetText method (PBDOM_ELEMENT) 226
 - GetText method (PBDOM_OBJECT) 276
 - GetText method
 - (PBDOM_PROCESSINGINSTRUCTION) 297
 - GetText method (PBDOM_TEXT) 312
 - GetTextNormalize method (PBDOM_ATTRIBUTE) 66
 - GetTextNormalize method (PBDOM_CDATA) 110
 - GetTextNormalize method
 - (PBDOM_CHARACTERDATA) 141
 - GetTextNormalize method (PBDOM_COMMENT) 161
 - GetTextNormalize method (PBDOM_ELEMENT) 226
 - GetTextNormalize method (PBDOM_OBJECT) 278
 - GetTextNormalize method
 - (PBDOM_PROCESSINGINSTRUCTION) 298
 - GetTextTrim method (PBDOM_ATTRIBUTE) 68
 - GetTextTrim method (PBDOM_CDATA) 110
 - GetTextTrim method
 - (PBDOM_CHARACTERDATA) 144
 - GetTextTrim method (PBDOM_COMMENT) 162
 - GetTextTrim method (PBDOM_ELEMENT) 227
 - GetTextTrim method (PBDOM_OBJECT) 280
 - GetTextTrim method
 - (PBDOM_PROCESSINGINSTRUCTION) 298
 - GetTextTrim method (PBDOM_TEXT) 313
 - GetTimeValue method (PBDOM_ATTRIBUTE) 69
 - GetUIntValue method (PBDOM_ATTRIBUTE) 70
 - GetUlongValue method (PBDOM_ATTRIBUTE) 70
 - GetValue method
 - (PBDOM_PROCESSINGINSTRUCTION) 299
- ## H
- HasAttributes method (PBDOM_ELEMENT) 228
 - HasChildElements method
 - (PBDOM_ELEMENT) 228
 - HasChildren method (PBDOM_ATTRIBUTE) 71
 - HasChildren method
 - (PBDOM_CHARACTERDATA) 148
 - HasChildren method (PBDOM_DOCUMENT) 186
 - HasChildren method (PBDOM_ELEMENT) 229
 - HasChildren method (PBDOM_OBJECT) 283
 - HasRootElement method
 - (PBDOM_DOCUMENT) 186
- ## I
- InsertContent method (PBDOM_ATTRIBUTE) 72
 - InsertContent method (PBDOM_DOCUMENT) 186
 - InsertContent method (PBDOM_ELEMENT) 230
 - InsertContent method (PBDOM_OBJECT) 284
 - IsAncestorObjectOf method
 - (PBDOM_ATTRIBUTE) 74
 - IsAncestorOf method
 - (PBDOM_CHARACTERDATA) 149
 - IsAncestorOf method (PBDOM_DOCUMENT) 189
 - IsAncestorOf method (PBDOM_ELEMENT) 232
 - IsAncestorOf method (PBDOM_OBJECT) 285
 - IsJavaVMLoaded method (JavaVM) 27
 - IsRootElement method (PBDOM_ELEMENT) 232

J

JavaVM class 16

L

Lookup method (EJBConnection) 9

N

NewDocument method
(PBDOM_DOCUMENT) 189
nonvisual extensions, using 3

P

PBDOM classes
 overview 43
 quick reference 317
PBDOM exceptions 259
PBDOM_ATTRIBUTE class 45
PBDOM_BUILDER class 95
PBDOM_CDATA class 103
PBDOM_CHARACTERDATA class 121
PBDOM_COMMENT class 153
PBDOM_DOCTYPE class 165
PBDOM_DOCUMENT class 177
PBDOM_ELEMENT class 199
PBDOM_ENTITYREFERENCE class 113
PBDOM_EXCEPTION class 265
PBDOM_OBJECT class 267
PBDOM_PROCESSINGINSTRUCTION class 291
PBDOM_TEXT class 305
PowerBuilder extensions
 about 1
 using 2

R

RemoveAttribute method
(PBDOM_ELEMENT) 233

RemoveChildElement method
(PBDOM_ELEMENT) 235
RemoveChildElements method
(PBDOM_ELEMENT) 237
RemoveContent method (PBDOM_ATTRIBUTE) 75
RemoveContent method
(PBDOM_DOCUMENT) 193
RemoveContent method (PBDOM_ELEMENT) 239
RemoveContent method (PBDOM_OBJECT) 286
RemoveNamespaceDeclaration method
(PBDOM_ELEMENT) 240
RemoveValue method
(PBDOM_PROCESSINGINSTRUCTION)
299
Rollback method (EJBTransaction) 13

S

SaveDocument method
(PBDOM_DOCUMENT) 194
SetAttribute method (PBDOM_ELEMENT) 241
SetAttributes method (PBDOM_ELEMENT) 249
SetBooleanValue method
(PBDOM_ATTRIBUTE) 77
SetContent method (PBDOM_ATTRIBUTE) 77
SetContent method (PBDOM_DOCUMENT) 195
SetContent method (PBDOM_ELEMENT) 252
SetContent method (PBDOM_OBJECT) 287
SetData method
(PBDOM_PROCESSINGINSTRUCTION)
300
SetDateTimeValue method
(PBDOM_ATTRIBUTE) 81
SetDateValue method (PBDOM_ATTRIBUTE) 80
SetDocType method (PBDOM_DOCUMENT) 196
SetDocument method (PBDOM_DOCTYPE) 171
SetDocument method (PBDOM_ELEMENT) 255
SetDoubleValue method (PBDOM_ATTRIBUTE) 82
setInquiryUrl method (UDDIProxy) 36
SetInternalSubset method (PBDOM_DOCTYPE) 171
SetIntValue method (PBDOM_ATTRIBUTE) 83
SetLongValue method (PBDOM_ATTRIBUTE) 83
SetMessage method (SoapException) 34
SetName method (PBDOM_ATTRIBUTE) 83
SetName method (PBDOM_DOCTYPE) 172

SetName method (PBDOM_ELEMENT) 255
SetName method (PBDOM_ENTITYREFERENCE) 119
SetName method (PBDOM_OBJECT) 288
SetName method
 (PBDOM_PROCESSINGINSTRUCTION) 301
SetNamespace method (PBDOM_ATTRIBUTE) 86
SetNamespace method (PBDOM_ELEMENT) 256
setOption method (UDDIProxy) 37
SetOptions method (SoapConnection) 31
SetOwnerElementObject method
 (PBDOM_ATTRIBUTE) 89
SetParent method (PBDOM_ATTRIBUTE) 45
SetParentObject method (PBDOM_CDATA) 111
SetParentObject method
 (PBDOM_CHARACTERDATA) 149
SetParentObject method (PBDOM_COMMENT) 162
SetParentObject method (PBDOM_DOCTYPE) 172
SetParentObject method (PBDOM_ELEMENT) 257
SetParentObject method
 (PBDOM_ENTITYREFERENCE) 119
SetParentObject method (PBDOM_OBJECT) 289
SetParentObject method
 (PBDOM_PROCESSINGINSTRUCTION) 302
SetParentObject method (PBDOM_TEXT) 313
SetProxyServerOptions method (SoapConnection) 33
SetRealValue method (PBDOM_ATTRIBUTE) 91
SetRollbackOnly method (EJBTransaction) 14
SetRootElement method (PBDOM_DOCUMENT) 197
SetSystemID method (PBDOM_DOCTYPE) 174
SetText method (PBDOM_ATTRIBUTE) 92
SetText method (PBDOM_CDATA) 112
SetText method (PBDOM_CHARACTERDATA) 152
SetText method (PBDOM_COMMENT) 163
SetText method (PBDOM_ELEMENT) 258
SetText method (PBDOM_TEXT) 314
SetTimeValue method (PBDOM_ATTRIBUTE) 92
SetTransactionTimeout method (EJBTransaction) 15
SetUIntValue method (PBDOM_ATTRIBUTE) 93
SetUlongValue method (PBDOM_ATTRIBUTE) 93
SetValue method
 (PBDOM_PROCESSINGINSTRUCTION) 303
SoapConnection class 29
SoapException class 34

T

typographical conventions xiv

U

UDDIProxy class 36

V

visual extensions, using 3